



1. Dimensions:

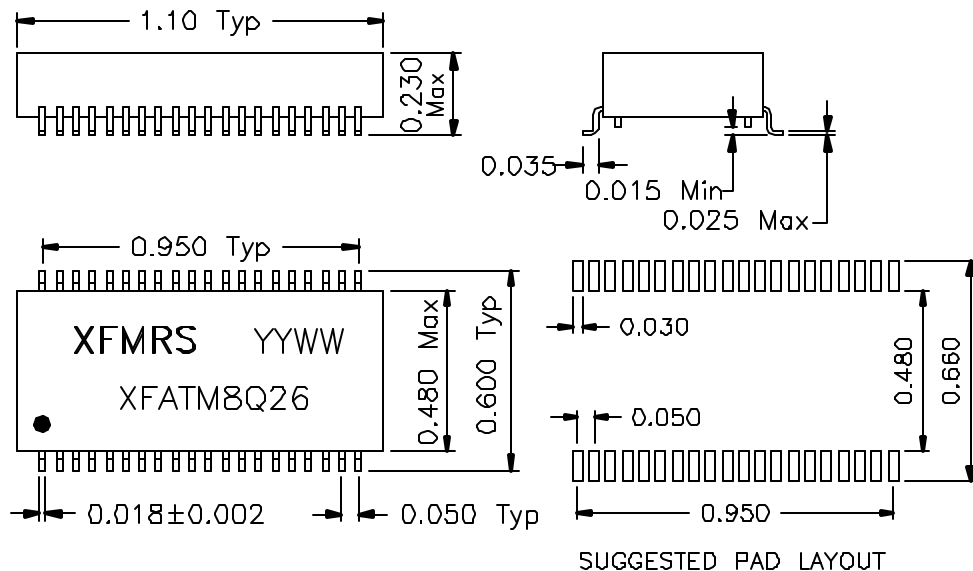

2. Schematic:

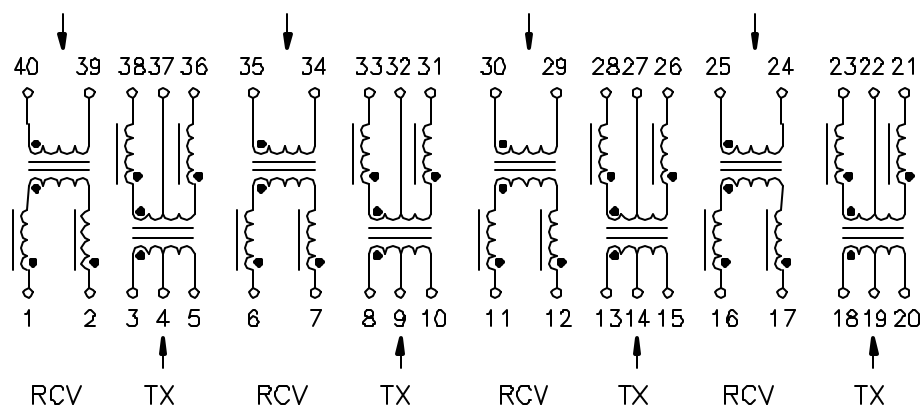

3. Electrical Specifications: @25°C

PRI/SEC ISOLATION: 1500 Vrms

TURNS RATIO: 1CT:1.41CT (TX)

TURNS RATIO: 1:1 (RCV)

OCL: 350uH Minimum @100KHz 100mV 8mADC

INSERTION LOSS: -0.5dB Max (100KHz-100MHz)

RETURN LOSS: -18dB Typ 30MHz

-12dB Typ 80MHz

CROSSTALK: -60dB TYPICAL @1MHz

-50dB TYPICAL @30MHz

-40dB TYPICAL @60MHz

-35dB TYPICAL @100MHz

CMRR: (Tx) -40dB Min 100KHz to 60MHz

CMRR: (Rx) -30dB Min 100KHz to 60MHz

DCMR: -45dB Min 100KHz to 60MHz

DCMR: -35dB Min 60MHz to 200MHz

DOC. REV: A/1

XFMRS Inc		Title: Quad Port 10/100BASE-TX Module	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH		P/N: XFATM8Q26	REV. A
		DWN. 廖玉坤	Jan-11-00
		CHK. 李清儿	Jan-11-00
SHEET 1 OF 1		APP. Joe Huff	Jan-11-00