

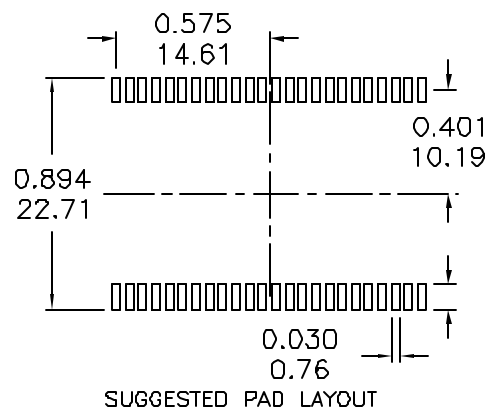


1. Dimensions:

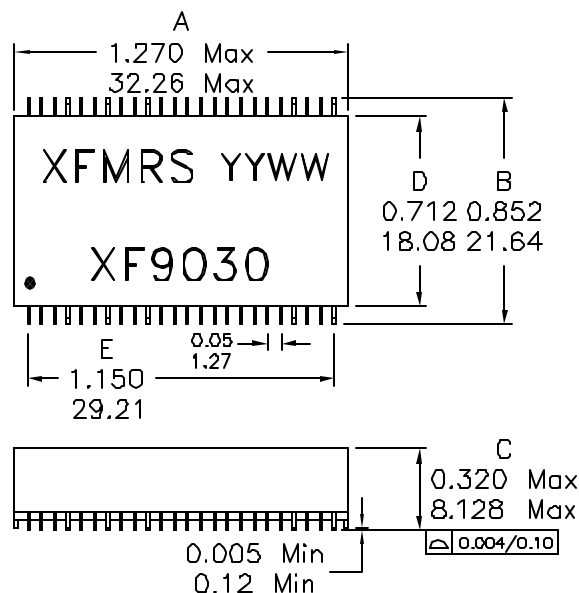

2. Schematic:

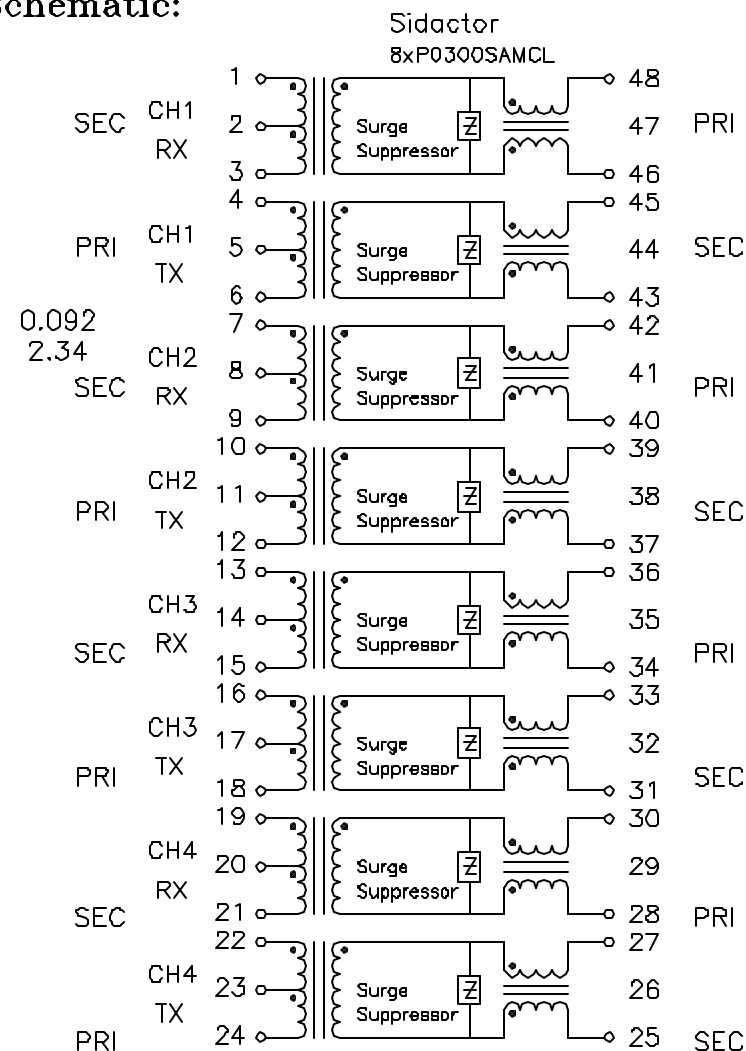

3. Electrical Specifications: @25°C

Turns Ratio: PRI/SEC TX 1CT:2 RX 1CT:1
 Isolation Voltage: 1500 Vrms (Input to Output)
 RX PRI OCL: 1.20mH Minimum @100KHz,100mV
 TX PRI OCL: 0.60mH Minimum @100KHz,100mV
 RX PRI Leakage Inductance: 0.8uH Maximum @100KHz 100mV SEC Shorted
 TX PRI Leakage Inductance: 0.5uH Maximum @100KHz 100mV SEC Shorted
 PRI/SEC Cw/w: 35pF Typical @100KHz 100mV

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Glass F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- SMD Lead Coplanarity: $\pm 0.004" (0.102\text{mm})$
- Electrical and mechanical specifications 100% tested
- RoHS 5/6 Compliant, 63/37 leaded solder dipping on FG pins
- Recommended IR Reflow temp 225°C Max.

DOC. REV: A/8

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS INC. www.XFMRS.com		Title: T1/CEPT/ISDN-PRI TRANSFORMER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ± 0.010 Inch Dimensions in Inch/mm		P/N: XF9030	REV. A
		DWN.	Xianyi Jul-15-09
		CHK.	YK Liao Jul-15-09
		APP.	Joe Huff Jul-15-09
SHT 1 OF 1			