


**NEW!**

Flyback Transformer

For Maxim Off-Line
LED Driver

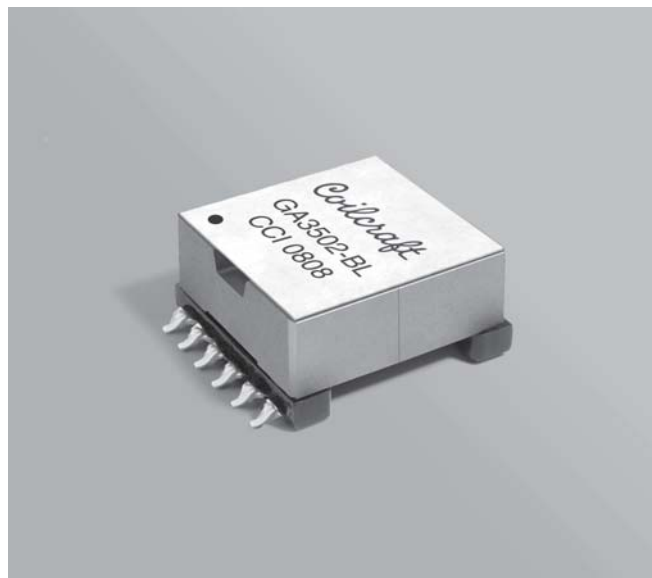

- Designed for PWM Dimming of High-Brightness LEDs
- Bias winding output: 18 V, 20 mA
- 400 V input; 110 V, 0.4 A output
- 1500 Vrms primary and bias to secondary isolation

Core material Ferrite

Terminations RoHS tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 21.3 g

Ambient temperature -40°C to +125°C

Storage temperature Component: -40°C to +125°C.

Packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)



38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 24 parts per tray


PCB washing Only pure water or alcohol recommended

Part number	Inductance at 0 A ¹ ±10% (μH)	Inductance at I _{pk} ² min (μH)	DCR max (Ohms)	Leakage Inductance ³ max (μH)	Turns ratio pri : sec pri : bias	I _{pk} ² (A)	Output ⁴
GA3502-BL	800	720	1.283 (pins 1-3) 0.146 (pins 5-6) 0.361 (pins 12-7)	6.60	1 : 0.035 1 : 0.06	0.75	110 V, 0.4 A

1. Inductance is for the primary (pins 1-3), measured at 250 kHz, 0.3 Vrms.
 2. Peak primary current drawn at minimum input voltage.
 3. Leakage inductance is for the primary winding (pins 1-3) with the secondary winding shorted.
 4. Output is for the secondary. Bias winding output is 18 V, 20 mA.
 5. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

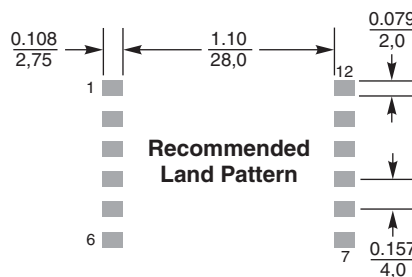

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

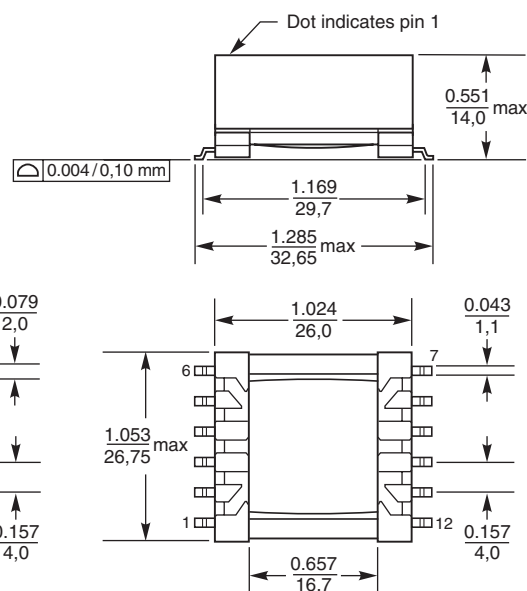

Coilcraft® These parts are preproduction products for electrical evaluation only.
Specification subject to change without notice.

Document 708 Revised 10/28/08

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>