





Power Choke High Current

PCHC127H

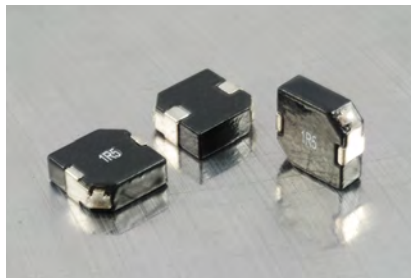

Dimensions: Inches
(mm)

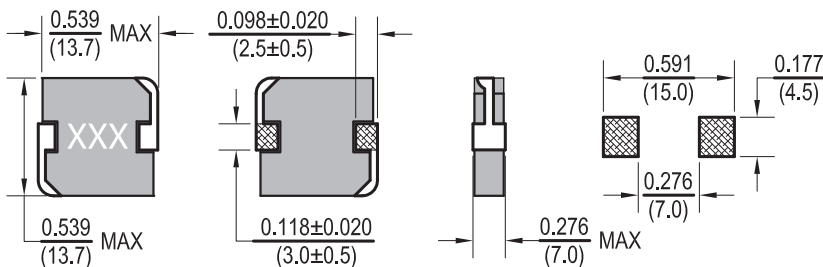

Allied Part Number	Inductance (μ H)	Tolerance (%)	Test Freq. KHz, 1v	DCR (Ω) Max	Isat (A)	Irms (A) Max.
PCHC127H-R47M-RC	0.47	20	100	1.2	65	41
PCHC127H-R68M-RC	0.68	20	100	1.6	60	35
PCHC127H-1R0M-RC	1.00	20	100	2.1	50	32
PCHC127H-1R5M-RC	1.50	20	100	2.6	48	27
PCHC127H-2R2M-RC	2.20	20	100	4.2	40	22
PCHC127H-3R3M-RC	3.30	20	100	6.8	35	18
PCHC127H-4R7M-RC	4.70	20	100	11.2	30	15
PCHC127H-6R8M-RC	6.80	20	100	14	21	12
PCHC127H-100M-RC	10	20	100	16.8	16	10

All specifications subject to change without notice.

Features

- Magnetically shielded construction
- High saturation current up to 65A
- Expanded operating temp range
- Low DC Resistance
- Suitable for pick and place

Electrical

Inductance Range: .47 μ H to 10 μ H

Additional values available

Tolerance: 20% over entire range, Available in tighter tolerances

Test Frequency: 100KHz, 1.0Vdc

Operating Temp: -55°C ~ +125°C


Storage Temp: -55°C ~ +125°C

Temp Rise: $\Delta T = 40^\circ\text{C}$ Typical at rated I_{rms} without core loss.

Part temperature should not exceed 125°C including temperature rise.

Inductance Drop: 20% typical at rated Isat

Schematic



Resistance to Soldering Heat

Pre-Heat 150°C, 1 minute.

Solder Composition: Sn/Ag3.0/Cu0.5

Solder Temp: 260°C $\pm$ 5°C

Immersion Time: 10 sec. $\pm$ 1 sec.

Test Equipment

(L): HP4284A LCR meter or equivalent

(DCR): CH16502, Agilent 33420A Mico-Ohm Meter

IDC: 3260B WK & DC Bias 3265BWK

Physical

Packaging: 500 pieces per 13 inch reel.

Marking: EIA Inductance Code