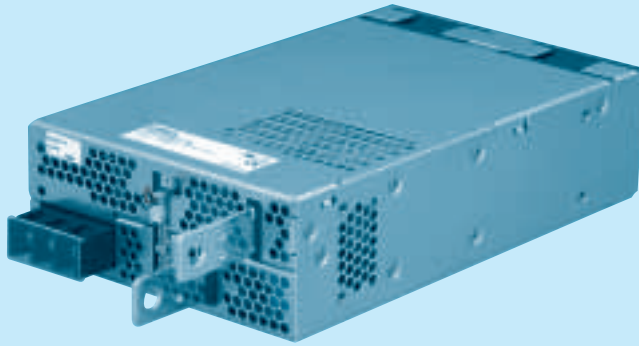


- ① Series name
 ② Single output
 ③ Output wattage
 ④ Universal input
 ⑤ Output voltage
 ⑥ Optional
 C : with Coating
 G : Low leakage current
 U : Operation stop voltage
 is set at a lower value
 F1 : With Long-Life fan
 F3 : Reverse air exhaust
 type
 F4 : Low speed fan

MODEL	PBA1000F-3R3	PBA1000F-5	PBA1000F-7R5	PBA1000F-12	PBA1000F-15	PBA1000F-24	PBA1000F-36	PBA1000F-48
MAX OUTPUT WATTAGE[W]	660	1000	1005	1056	1050	1056	1044	1056
DC OUTPUT	ACIN 100V	3.3V 200A	5V 200A	7.5V 134A	12V 88A	15V 70A	24V 44A	36V 29A
	ACIN 200V *3	3.3V 200A	5V 200A	7.5V 134A	12V 88A	15V 70A	24V 44(51)A	36V 29A

SPECIFICATIONS

	MODEL	PBA1000F-3R3	PBA1000F-5	PBA1000F-7R5	PBA1000F-12	PBA1000F-15	PBA1000F-24	PBA1000F-36	PBA1000F-48					
INPUT	VOLTAGE[V]	AC85 - 264 1ϕ or DC120 - 350 (AC50 or DC70 Please refer to the instruction manual 7. option *5)												
	CURRENT[A]	ACIN 100V	9typ	13typ										
		ACIN 200V	5typ	7typ										
	FREQUENCY[Hz]	50/60 (47 - 63)												
	EFFICIENCY[%]	ACIN 100V	74typ	79typ	80typ	82typ	82typ	84typ	84typ					
		ACIN 200V	76typ	81typ	83typ	84typ	84typ	86typ	86typ					
	POWER FACTOR	ACIN 100V	0.98typ (Io=100%)											
		ACIN 200V	0.95typ (Io=100%)											
INRUSH CURRENT[A]	ACIN 100V	20/40typ (Io=100%) (Primary inrush current /Secondary inrush current) (More then 10 sec. to re-start)												
	ACIN 200V	40/40typ (Io=100%) (Primary inrush current /Secondary inrush current) (More then 10 sec. to re-start)												
LEAKAGE CURRENT[mA]	0.5/1.0max (ACIN 100V/240V 60Hz, Io=100%, According to IEC60950-1, DENAN)													
OUTPUT	VOLTAGE[V]	3.3	5	7.5	12	15	24	36	48					
	CURRENT[A]	ACIN 100V	200	200	134	88	70	44	29	22				
		ACIN 200V *3	200	200	134	88	70	44(51)	29	22				
	LINE REGULATION[mV]	20max	20max	36max	48max	60max	96max	144max	192max					
	LOAD REGULATION[mV]	40max	40max	60max	100max	120max	150max	150max	300max					
	RIPPLE[mVp-p]	0 to +50℃ *1	80max	80max	120max	120max	120max	120max	150max	150max				
		-20 - 0℃ *1	140max	140max	160max	160max	160max	160max	160max	400max				
	RIPPLE NOISE[mVp-p]	0 to +50℃ *1	120max	120max	150max	150max	150max	150max	200max	200max				
		-20 - 0℃ *1	160max	160max	180max	180max	180max	180max	240max	500max				
	TEMPERATURE REGULATION[mV]	0 to +50℃ *1	40max	50max	75max	120max	150max	240max	360max	480max				
		-20 to +50℃ *1	60max	75max	120max	180max	180max	290max	440max	600max				
	DRIFT[mV]	*2	12max	20max	30max	48max	60max	96max	144max	192max				
	START-UP TIME[ms]	400typ(ACIN 100/200V, Io=100%) *Start-up time is 500ms typ for less than 1minute of applying input again from turning off the input voltage.												
	HOLD-UP TIME[ms]	20typ (ACIN 100/200V, Io=100%)												
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	2.64 - 3.96		3.96 - 6.00		5.25 - 8.25		8.25 - 13.20		10.50 - 16.50	16.50 - 26.40	25.20 - 39.60	38.40 - 56.00		
OUTPUT VOLTAGE SETTING[V]	3.30 - 3.40		5.00 - 5.15		7.50 - 7.80		12.00 - 12.48		15.00 - 15.60		24.00 - 24.96		36.00 - 37.44	48.00 - 49.92
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rated current or 101% of peak current and recovers automatically												
	OVERVOLTAGE PROTECTION[V] *4	Vo+0.66 - 1.32	Vo+1.0 - 2.0	Vo+1.5 - 3.0	Vo+2.4 - 4.8	Vo+3.0 - 6.0	Vo+4.8 - 9.6	Vo+7.2 - 14.4	Vo+4.8 - 12.0					
	OPERATING INDICATION	LED (Green)												
	REMOTE SENSING	Provided												
REMOTE ON/OFF	Provided													
ISOLATION	INPUT-OUTPUT · RC	AC3.000V 1minute, Cutoff current = 25mA, DC500V 50MΩmin (At Room Temperature)												
	INPUT-FG	AC2.000V 1minute, Cutoff current = 25mA, DC500V 50MΩmin (At Room Temperature)												
	OUTPUT · RC · AUX-FG	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩmin (At Room Temperature)												
	OUTPUT-RC · AUX	AC100V 1minute, Cutoff current = 100mA, DC100V 50MΩmin (At Room Temperature)												
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE	-20 to +71℃ (Required Derating), 20 - 90%RH (Non condensing) 3,000m (10,000feet) max												
	STORAGE TEMP.,HUMID.AND ALTITUDE	-20 to +75℃, 20 - 90%RH (Non condensing) 3,000m (10,000feet) max												
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis												
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis												
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS (At only AC input)	UL60950-1, C-UL(CSA60950-1), EN60950-1, EN50178 Complies with DEN-AN												
	CONDUCTED NOISE	Complies with FCC Part15 classB, VCCI-B, CISPR22-B, EN55011-B, EN55022-B												
	CE MARKING	Low Voltage Directive, EMC Directive												
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2												
OTHERS	CASE SIZE/WEIGHT	150×61×240mm (without terminal block and screw) (W×H×D) /2.2kg max												
	COOLING METHOD	Forced cooling (internal fan)												


- *1 Measured by 20MHz oscilloscope or Ripple-Noise meter(equivalent to KEISOKU-GIKEN :RM101).
 Ripple and ripple noise is measured on measuring board with capacitor of 22 μF within 150mm from the output terminal.
 *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
 *3 () means peak current. Peak loading for 10s. And Duty 35% max, refer to Instruction manual

- in detail.
 *4 Overvoltage protection circuit to follow to output voltage setting.
 *5 Derating is required. Consult us for details.
 * A sound may occur from power supply at pulse loading.


Distribution:

RSG Electronic Components GmbH ▪ Sprendlinger Landstr. 115 ▪ D-63069 Offenbach/Germany
 Tel. +49 69 984047-0 ▪ Fax +49 69 984047-77 ▪ info@rsg-electronic.de ▪ www.rsg-electronic.de
 Änderungen vorbehalten / subject to change without notice

Block diagram

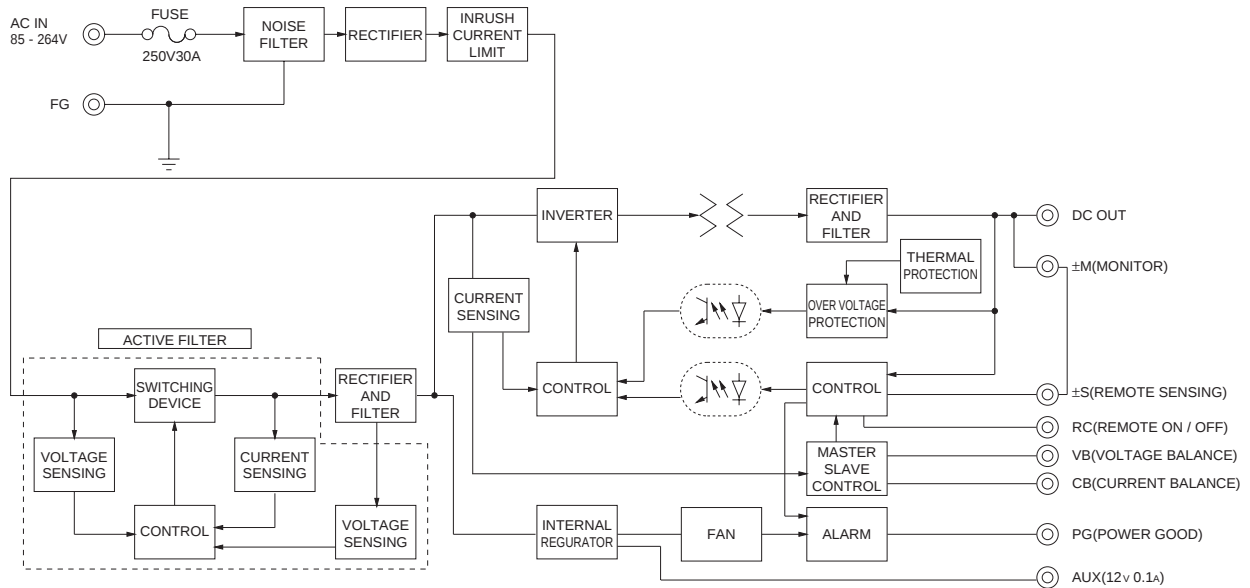

External view

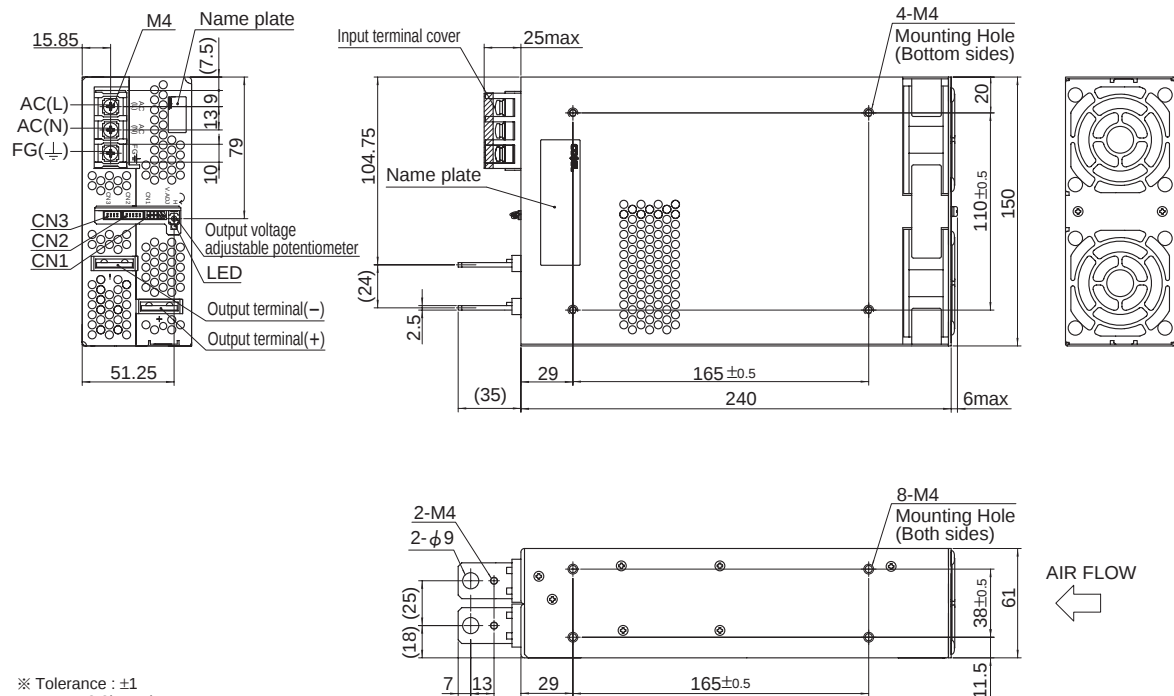

- ※ Tolerance : ±1
- ※ Mass : 2.2kg or less
- ※ PCB Material/thickness : FR-4 / 1.6mm
- ※ Chassis material : Aluminum
- ※ Dimensions in mm
- ※ Mounting torque : 1.2N • m (12.8kgf • cm) max
- ※ Screw tightening torque : 1.6N • m (16.9kgf • cm) max
- ※ The housing for the remote sensing unused is mounted on CN1
- ※ Please connect earth to FG terminal on the unit.

Distribution:

RSG Electronic Components GmbH ▪ Spremlinger Landstr. 115 ▪ D-63069 Offenbach/Germany
Tel. +49 69 984047-0 ▪ Fax +49 69 984047-77 ▪ info@rsg-electronic.de ▪ www.rsg-electronic.de

Änderungen vorbehalten / subject to change without notice