



硅整流二极管 General Purpose Rectifier


■特征 Features

- I_o 3.0A
- V_{RRM} 50V-1000V
- 耐正向浪涌电流能力高
High surge current capability
- 封装: 模压塑料
Cases: Molded plastic

■用途 Applications

- 整流用 Rectifier

■外形尺寸和印记 Outline Dimensions and Mark

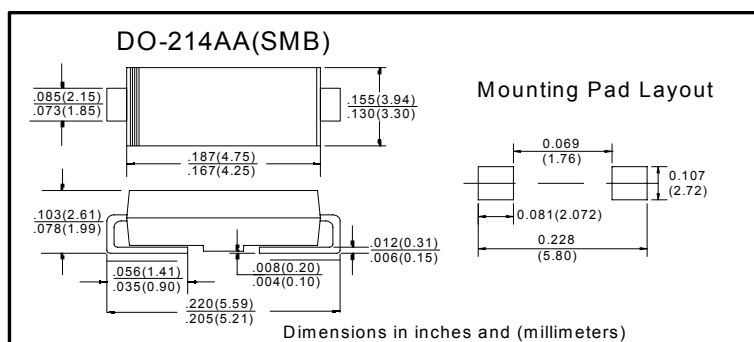

■极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Conditions	GS3						
				AB	BB	DB	GB	JB	KB	MB
反向重复峰值电压 Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 60Hz, 电阻负载, $T_L=110^{\circ}\text{C}$ 60HZ Half-sine wave, Resistance load, $T_L=110^{\circ}\text{C}$	3						
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	I_{FSM}	A	正弦半波 60Hz, 一个周期, $T_a=25^{\circ}\text{C}$ 60Hz Half-sine wave, 1 cycle, $T_a=25^{\circ}\text{C}$	100						
结温 Junction Temperature	T_J	$^{\circ}\text{C}$		-55~+150						
储存温度 Storage Temperature	T_{STG}	$^{\circ}\text{C}$		-55 ~ +150						

■电特性（ $T_a=25^{\circ}\text{C}$ 除非另有规定）Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	GS3						
				AB	BB	DB	GB	JB	KB	MB
正向峰值电压 Peak Forward Voltage	V_F	V	$I_F=2.5\text{A}$	1.15						
反向漏电流 Peak Reverse Current	I_{RRM1}	μA	$V_{RM}=V_{RRM}$	$T_a=25^{\circ}\text{C}$						
	I_{RRM2}			$T_a=125^{\circ}\text{C}$						
热阻(典型) Thermal Resistance(Typical)	$R_{\theta J-L}$	$^{\circ}\text{C/W}$	结和终端之间 Between junction and terminal	10 ¹⁾						

备注: Notes:

¹⁾ 热阻从结到环境及从结到引线, 在电路板的0.2" x 0.2" (5.0毫米 x 5.0毫米)铜垫片区

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

■ 特性曲线 (典型) Characteristics(Typical)

图1: 正向电流降额曲线
FIG.1: FORWARD CURRENT DERATING CURVE

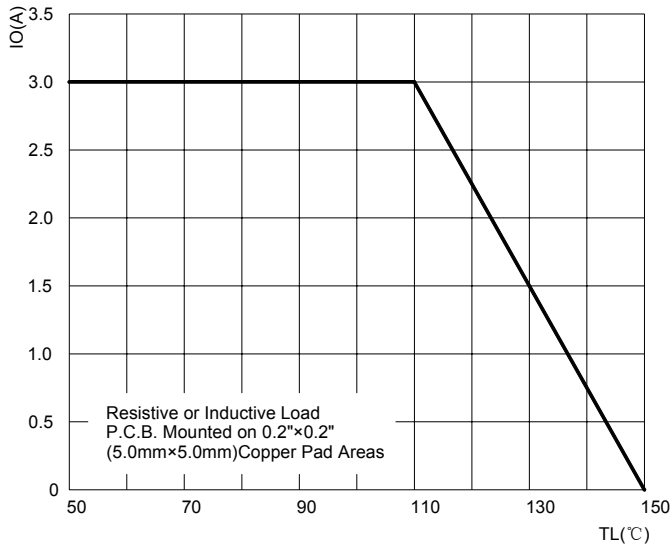


图2: 最大正向浪涌冲击耐受能力
FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

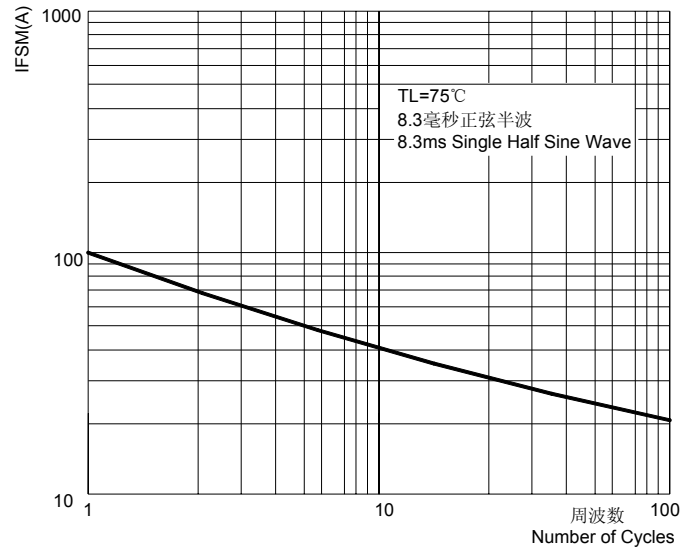


图3: 典型正向特性曲线
FIG.3: TYPICAL FORWARD CHARACTERISTICS

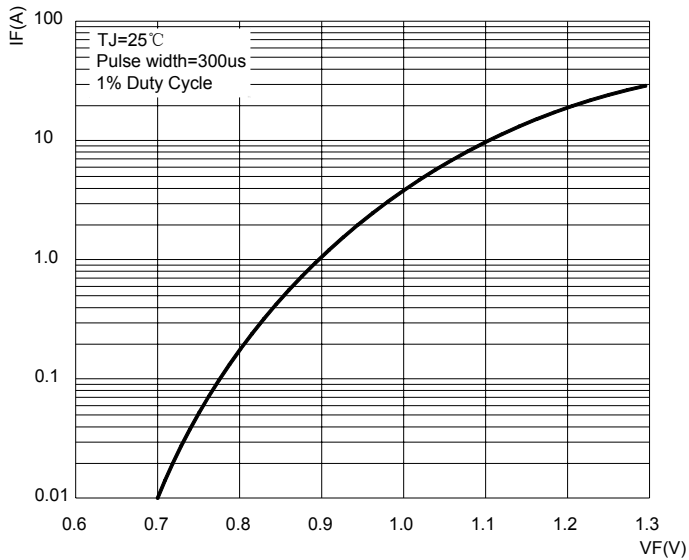


图4: 典型反向特性曲线
FIG.4: TYPICAL REVERSE CHARACTERISTICS

