


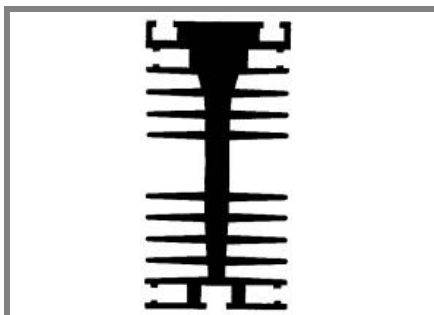

Heatsink

For stud devices


P 30

Features

- Intended for stud mounted devices
- Available in various lengths
- Several devices can be mounted on a single heatsink

Standard lengths	n	b / d Ø mm	R_{thha} natural cooling K/W	R_{thha} K/W	w kg
P 30/120	1		1,0 (60W)		1
P 30/170	2		1,6 (33W)		1,4
P 30/200	3		2,0 (30W)		1,6
P 30/300	3		1,6 (35W)		2,4

Dimensions in mm

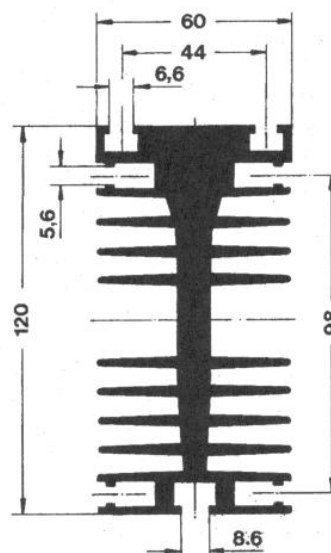

P 30 general profile dimensions (w = 8 kg/m)

