


SURFACE MOUNT POSITIVE ADJUSTABLE 1.5 AMP VOLTAGE REGULATOR



**Isolated Hermetic Surface Mount Package
1.5 Amp, High Voltage, Positive Adjustable
Voltage Regulator**

FEATURES

- Hermetic Isolated Surface Mount Package
- Adjustable Output Voltage
- Eliminates Stocking Fixed Voltages
- Built-In Thermal Overload Protection
- Short Circuit Current Limiting
- Product Is Available Hi-Rel Screened
- Electrically Similar To Industry Standard Type LM117HV



DESCRIPTION

This three terminal positive regulator is supplied in a hermetically sealed metal surface mount package. All protective features are designed into the circuit, including thermal shutdown, current limiting and safe-area control. With heat sinking, they can deliver over 1.5 amp of output current. This unit features output voltages that can be trimmed using external resistors, from 1.2 volts to 57 volts.

ABSOLUTE MAXIMUM RATINGS @ 25°C

Input To Output Voltage Differential	60 V
Operating Junction Temperature Range	- 55°C to + 150°C
Storage Temperature Range	- 55°C to + 150°C
Typical Power/Thermal Characteristics:	
Rated Power:	
T_C	17.5W
T_A	3W
Thermal Resistance:	
θ_{JC}	4.2°C/W
θ_{JA}	42°C/W
Max. Lead Solder Temperature for 5 sec	225°C

MECHANICAL OUTLINE

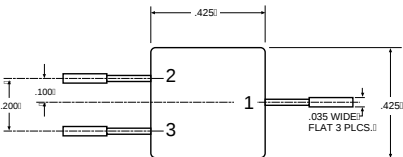

Pin Connections
Pin 1: V_{OUT}
Pin 2: Adjust
Pin 3: V_{IN}
Case: Isolated

3.5

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com