


OM5209SC OM5211SC OM5213SC
OM5210SC OM5212SC

DUAL HIGH EFFICIENCY RECTIFIERS IN HERMETIC MO-078AA PACKAGE



15 Amp, 50 To 400 Volts, 35 To 50 ns trr

FEATURES

- Very Low Forward Voltage
- Very Fast Switching Time
- Hermetic 5-Pin Metal Package, JEDEC MO-078AA Outline
- Low Thermal Resistance
- Isolated Package
- High Surge
- Two Uncommitted Rectifiers
- Available Screened To MIL-S-19500, TX, TXV And S Levels

DESCRIPTION


This series of products in a hermetic package is specifically designed for use at power switching frequencies in excess of 100 kHz. This series combines two uncommitted high efficiency devices into one package, simplifying installation, reducing heat sink hardware, and the need to obtain matched components. These devices are ideally suited for demanding applications where small size and a hermetically sealed package are required.

ABSOLUTE MAXIMUM RATINGS (Per Diode) @ 25°C


Peak Inverse Voltage	50 to 400 V
Maximum Average D.C. Output Current @ $T_C = 100^\circ \text{C}$	15 A
Non-Repetitive Sinusoidal Surge Current 8.3 ms	150 A
Operating and Storage Temperature Range	- 55° C to +150° C

3.2

SCHEMATIC

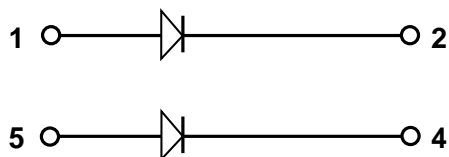

CONNECTION DIAGRAM



Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com