


HERMETIC SURFACE MOUNT FIXED VOLTAGE POSITIVE REGULATORS APPROVED TO DESC DRAWINGS



LCC 20 Fixed Voltage, Precision Positive Regulators In Hermetic Surface Mount Package

FEATURES

- Hermetic Surface Mount Package
- Output Voltages: +5V, +12V, +15V
- Output Voltages Set Internally To $\pm 1\%$
- Built-In Thermal Overload Protection
- Short Circuit Current Limiting
- Hi-Rel Screening Available

DESCRIPTION

These positive regulators are supplied in a hermetically sealed surface mount package. All protective features are designed into the circuit including thermal shutdown, current limiting and safe-area control. With heat sinking, they can deliver over .5 amps of output current. These units feature internally trimmed output voltages to $\pm 1\%$ of nominal voltage. Standard voltages are +5V, +12V, and +15V. These units are ideally suited for Military applications where a hermetic surface mount package is required.

PART NUMBER DESIGNATOR

Standard Military Drawing Number

5962-8778201 2X

5962-8777601 2X

5962-8855301 2X

Omnirel Part Number

OM1805N2M

OM1812N2M

OM1815N2M

3.5

ABSOLUTE MAXIMUM RATINGS @ 25°C

Input Voltage		+35 V
Operating Junction Temperature Range		- 55°C to + 150°C
Storage Temperature Range		- 65°C to + 150°C
Typical Power/Thermal Characteristics:		
Rated Power @ 25° C	T_C	2 W
	T_A	1040 mW
Thermal Resistance	θ_{JC}	20°C/W
	θ_{JA}	120°C/W

ELECTRICAL CHARACTERISTICS 5 Volt $V_{IN} = 10V, I_O = 100mA, -55^{\circ}C \leq T_A \leq 125^{\circ}C$ (unless otherwise specified)

Parameter	Symbol	Test Conditions		Min.	Max.	Unit
Output Voltage	V_{OUT}	$T_A = 25^{\circ}C$		4.92	5.08	V
		$V_{IN} = 7.5V$ to 20V $I_O = 5mA$ to 500 mA, $P \leq 2$ W	•	4.85	5.15	V
Line Regulation (Note 1) (Note 4)	V_{RLINE}	$V_{IN} = 7.5V$ to 20V	•		5	mV
			•		12	mV
		$V_{IN} = 8.0V$ to 12V	•		4	mV
Load Regulation (Note 1)	V_{RLOAD}	$I_O = 5mA$ to 500 mA	•		10	mV
			•		25	mV
Standby Current Drain	I_{SCD}		•		50	mV
			•		6	mA
Standby Current Drain Change With Line	ΔI_{SCD} (Line)	$V_{IN} = 7.5V$ to 20V	•		6.5	mA
			•		0.8	mA
Standby Current Drain Change With Load	ΔI_{SCD} (Load)	$I_O = 5mA$ to 500mA	•		0.5	mA
			•			
Dropout Voltage	V_{DO}	$T_A = 25^{\circ}C, \Delta V_{OUT} = 100mV, I_O = 500mA$			2.5	V
Peak Output Current	$I_{O(pk)}$	$T_A = 25^{\circ}C$		0.5	1.7	A
Short Circuit Current (Note 2)	I_{DS}	$V_{IN} = 35V$	•		0.7	A
			•		2.0	A
Ripple Rejection	$\frac{\Delta V_{IN}}{\Delta V_{OUT}}$	$f = 120$ Hz, $\Delta V_{IN} = 10V$		68		dB
	N_O	(Note 3) $T_A = 25^{\circ}C, f = 10$ Hz to 100KHz	•	60	40	dB
Output Noise Voltage (Note 3)						$\mu V/V$ RMS
Long Term Stability (Note 3)	$\frac{\Delta V_{OUT}}{\Delta t}$	$T_A = 25^{\circ}C, t = 1000$ hrs.			75	mV

3.5


- Notes:**
1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
 2. Short Circuit protection is only assured up to $V_{IN} = 35V$.
 3. If not tested, shall be guaranteed to the specified limits.
The • denotes the specifications which apply over the full operating temperature range.
 4. Minimum load current for full line regulation = 5.0 mA.

ELECTRICAL CHARACTERISTICS 12 Volt $V_{IN} = 19V$, $I_O = 100mA$, $-55^{\circ}C \leq T_A \leq 125^{\circ}C$ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Output Voltage	V_{OUT}	$T_A = 25^{\circ}C$	11.88	12.12	V
		$V_{IN} = 14.5V$ to $27V$ $I_O = 5mA$ to $500mA$, $P \leq 2W$	• 11.64	12.36	V
Line Regulation (Note 1) (Note 4)	V_{RLINE}	$V_{IN} = 14.5V$ to $27V$	•	18	mV
			•	50	mV
		$V_{IN} = 16V$ to $22V$	•	9	mV
Load Regulation (Note 1)	V_{RLOAD}	$I_O = 5mA$ to $500mA$	•	30	mV
			•	60	mV
Standby Current Drain	I_{SCD}		•	6.0	mA
			•	6.5	mA
Standby Current Drain Change With Line	ΔI_{SCD} (Line)	$V_{IN} = 15V$ to $30V$	•	0.8	mA
Standby Current Drain Change With Load	ΔI_{SCD} (Load)	$I_O = 5mA$ to $500mA$	•	0.5	mA
Dropout Voltage	V_{DO}	$\Delta V_{OUT} = 100mV$, $I_O = 500mA$	•	2.5	V
Peak Output Current	$I_{O(pk)}$	$T_A = 25^{\circ}C$	0.5	1.7	A
Short Circuit Current (Note 2)	I_{DS}	$V_{IN} = 35V$	•	0.7	A
				2.0	A
Ripple Rejection	$\frac{\Delta V_{IN}}{\Delta V_{OUT}}$	$f = 120Hz$, $\Delta V_{IN} = 10V$	61		dB
		(Note 3)	• 54		dB
Output Noise Voltage (Note 3)	N_O	$T_A = 25^{\circ}C$, $f = 10Hz$ to $100KHz$		40	$\mu V/V$ RMS
Long Term Stability (Note 3)	$\frac{\Delta V_{OUT}}{\Delta t}$	$T_A = 25^{\circ}C$, $t = 1000hrs.$		120	mV

Notes:

- Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
- Short Circuit protection is only assured up to $V_{IN} = 35V$.
- If not tested, shall be guaranteed to the specified limits.
The • denotes the specifications which apply over the full operating temperature range.
- Minimum load current for full line regulation = 5.0 mA.

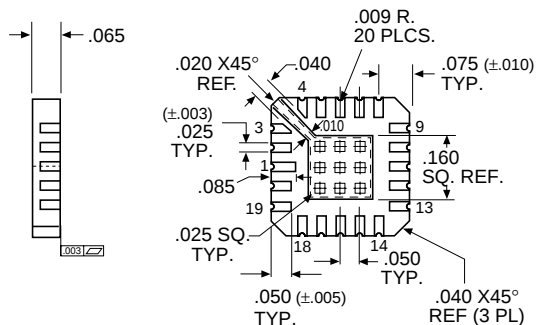MECHANICAL OUTLINE

NOTE: For normal operation, V_{OUT} must be connected externally to load.

Terminal Number

1	NC
2	V_{IN}
3	NC
4	NC
5	NC
6	NC
7	GND
8	NC
9	NC
10	V_{OUT}
11	NC
12	V_{OUT}
13	NC
14	NC
15	V_{OUT} SENSE
16	NC
17	V_{IN}
18	NC
19	NC
20	NC

3.5

ELECTRICAL CHARACTERISTICS 15 Volt $V_{IN} = 23V$, $I_O = 100mA$, $-55^{\circ}C \leq T_A \leq 125^{\circ}C$ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Output Voltage	V_{OUT}	$T_A = 25^{\circ}C$	14.8	15.2	V
		$V_{IN} = 18.5V$ to $30V$ $I_O = 5mA$ to $500mA$, $P \leq 2W$	• 14.6	15.4	V
Line Regulation (Note 1) (Note 4)	V_{RLINE}	$V_{IN} = 17.5V$ to $30V$	•	20 50	mV mV
		$V_{IN} = 20V$ to $26V$	•	15 25	mV mV
Load Regulation (Note 1)	V_{RLOAD}	$I_O = 5mA$ to $500mA$	•	50 90	mV mV
Standby Current Drain	I_{SCD}		•	6.0 6.5	mA mA
Standby Current Drain Change With Line	ΔI_{SCD} (Line)	$V_{IN} = 18.5V$ to $30V$	•	0.8	mA
Standby Current Drain Change With Load	ΔI_{SCD} (Load)	$I_O = 5mA$ to $500mA$	•	0.5	mA
Dropout Voltage	V_{DO}	$T_A = 25^{\circ}C$, $\Delta V_{OUT} = 100mV$, $I_O = 500mA$		2.5	V
Peak Output Current	$I_{O(pk)}$	$T_A = 25^{\circ}C$	0.5	1.7	A
Short Circuit Current (Note 2)	I_{DS}	$V_{IN} = 35V$	•	0.7 2.0	A A
Ripple Rejection	$\frac{\Delta V_{IN}}{\Delta V_{OUT}}$	$f = 120Hz$, $\Delta V_{IN} = 10V$	54		dB
		(Note 3)	• 52		dB
Output Noise Voltage (Note 3)	N_O	$T_A = 25^{\circ}C$, $f = 10Hz$ to $100KHz$		40	$\mu V/V$ RMS
Long Term Stability (Note 3)	$\frac{\Delta V_{OUT}}{\Delta t}$	$T_A = 25^{\circ}C$, $t = 1000hrs.$		150	mV

Notes:

1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. Short Circuit protection is only assured up to $V_{IN} = 35V$.
3. If not tested, shall be guaranteed to the specified limits.
The • denotes the specifications which apply over the full operating temperature range.
4. Minimum load current for full line regulation = 5.0 mA.