


1N4933 THRU 1N4937 1.0AMP. Fast Recovery Rectifiers

VOLTAGE:50 TO 600V

CURRENT:1.0A

Specification Features:

- Case: Epoxy, Molded
- Weight: 0.4Gram (Approximately)
- High current capability, Low leakage current
- High surge current capability
- Finish: All External Surfaces Corrosion Resistant And Terminal Leads Are Readily Solderable
- Lead And Mounting Surface Temperature For Soldering Purposed:
260°C Max. For 10 Seconds 1/16 Inch From Case
- RoHS Compliant
Cathode Indicated By Polarity Band

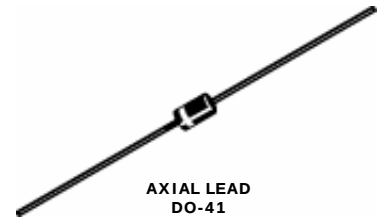

DEVICE MARKING DIAGRAM



1N49XX: Device Name 1N4933~ 1N4937

KEL : KEL Logo

Absolute Maximum Ratings

T_A = 25°C unless otherwise noted

Parameter	Symbol	1N 4933	1N 4934	1N 4935	1N 4936	1N 4937	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	V
Maximum DC Blocking Voltage	V _R	50	100	200	400	600	V
Maximum Average Forward Rectifier Current. (0.375" Lead Length @ T _A =75°C)	I _{F(AV)}	1.0					A
Non-repetitive Peak Forward Surge Current. (8.3mS Single Half Sine-wave)	I _{FSM}	30					A
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-65 to +150					°C
Thermal Resistance (Junction to Ambient) (Note 1)	R _{θJA}	65					°C/W


Electrical Characteristics

T_A = 25°C unless otherwise noted

Parameter	Symbol	1N 4933	1N 4934	1N 4935	1N 4936	1N 4937	Units
Reverse Current @V _R	I _R	5					uA
Forward Voltage @1A	V _F	1.2					V
Maximum Reverse Recovery Time (Note 2)	T _{RR}	200					nS
Total Capacitance @V _R =4V, f=1MHz	C _T	15					pF

NOTE: (1) Thermal resistance from junction to ambient at 0.375" lead length, vertical P.C. board mounted
 (2) Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$

Package Outline

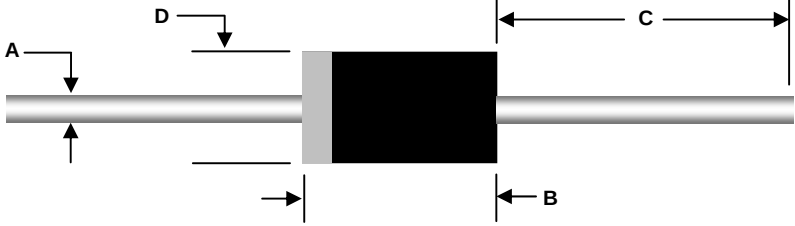Package	Case Outline				
DO-41					
	DIM	DO-41			
		Millimeters		Inches	
		Min	Max	Min	Max
	A	0.69	0.90	0.027	0.034
	B	4.20	5.20	0.166	0.205
	C	25.40	---	1.000	---
	D	2.00	2.70	0.080	0.107