



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

10A SILICON SINGLE-PHASE BRIDGE RECTIFIERS


BP10-005 THRU BP10-10

FEATURES

- CURRENT RATING 10A
- REVERSE VOLTAGE RATING UP TO 1000V
- TYPICAL IR LESS THAN $1\mu A$
- HIGH TEMPERATURE SOLDERING:
260°C /10 SECOND

MECHANICAL DATA

- CASE : METAL HEAT SINK CASE, ELECTRICALLY INSULATED
- TERMINALS: UNIVERSAL .25" (6.3mm) FAST ON DIMENSIONS IN INCHES AND (MILLIMETERS)
- MOUNTING METHOD: BOLT DOWN ON HEAT SINK WITH SILICON THERMAL COMPOUND BETWEEN BRIDGE AND MOUNTING SURFACE FOR MAXIMUM HEAT TRANSFER EFFICIENCY
- WEIGHT: 20 GRAMS

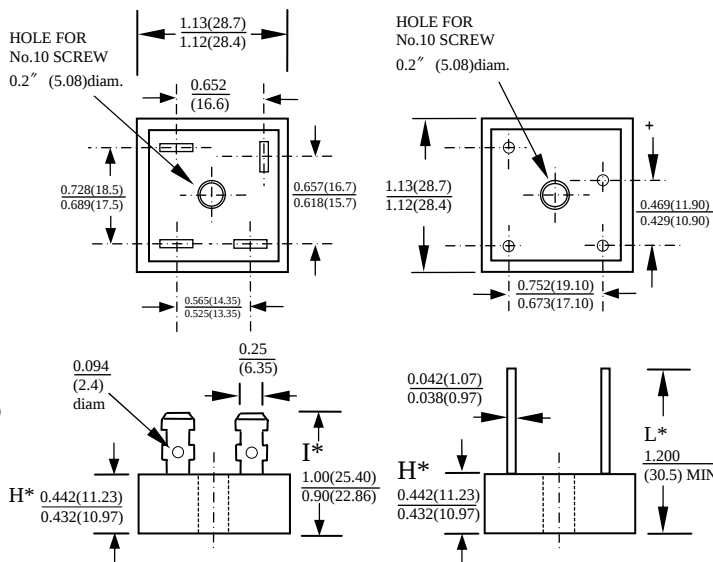

DIM	MIN	MAX	REMARK
H*	0.295(7.5)	0.311(7.9)	SUFFIX "S" THIN CASE
I*	0.74(18.80)	0.84(21.30)	SUFFIX "S" THIN CASE
L*	1.09(27.89)	-	SUFFIX "S" THIN CASE

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	BP10-005	BP10-01	BP10-02	BP10-04	BP10-06	BP10-08	BP10-10	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED OUTPUT CURRENT AT TC=55°C	I_O	10.0							A
PEAK FORWARD SURGE CURRENT SINGLE SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	200							A
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 175							°C
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 175							°C

ELECTRICAL CHARACTERISTICS (AT $T_A = 25^\circ C$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	BP10-005	BP10-01	BP10-02	BP10-04	BP10-06	BP10-08	BP10-10	UNITS
MAXIMUM INSTANTANEOUS FORWARD VOLTAGE PER BRIDGE ELEMENT AT SPECIFIED CURRENT	V_F	1.1							V
MAXIMUM REVERSE DC CURRENT AT RATED DC BLOCKING VOLTAGE PER ELEMENT	I_R	10							μA

NOTE: Suffix No. Versus Different Cases and Terminals

SUFIX No / CASE	NORMAL METAL CASE	THIN METAL CASE	NORMAL PLASTIC CASE ALUMINUM BASE	THIN PLASTIC CASE ALUMINUM BASE
FAST ON TERMINALS	NO SUFFIX	S	P	PS
WIRE LEAD TERMINALS	W	WS	PW	PWS
IN LINE PIN CONFIGURATION	-	-	L	LS

RATINGS AND CHARACTERISTIC CURVES BP10-005 THRU BP10-10

FIG. 1 - MAXIMUM OUTPUT
RECTIFIED CURRENT

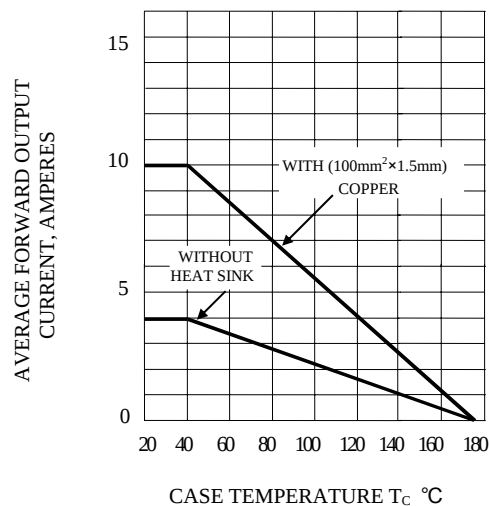


FIG. 2 - TYPICAL REVERES CHARACTERISTICS
AT $T_J=25^\circ\text{C}$

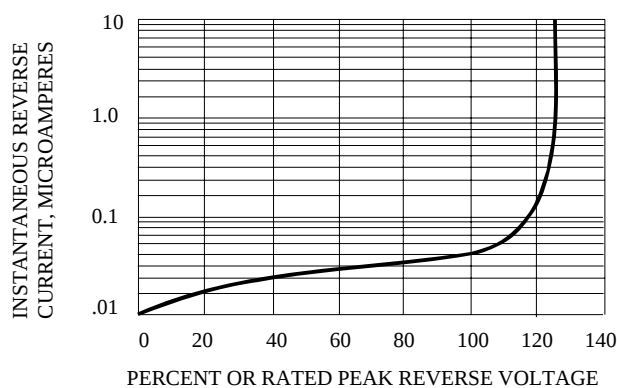


FIG. 3 - TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

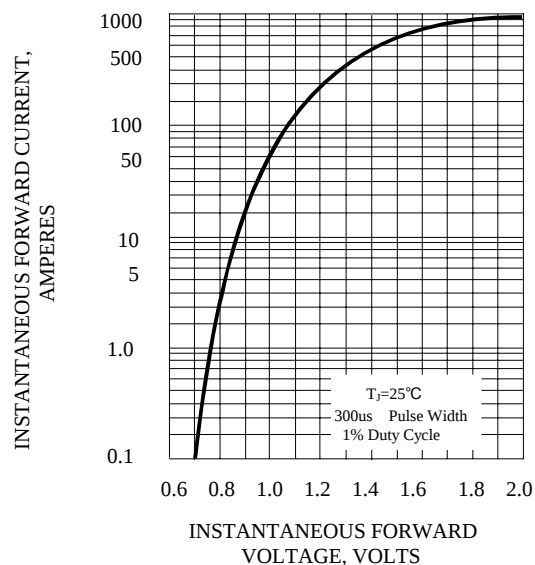


FIG. 4 - MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT



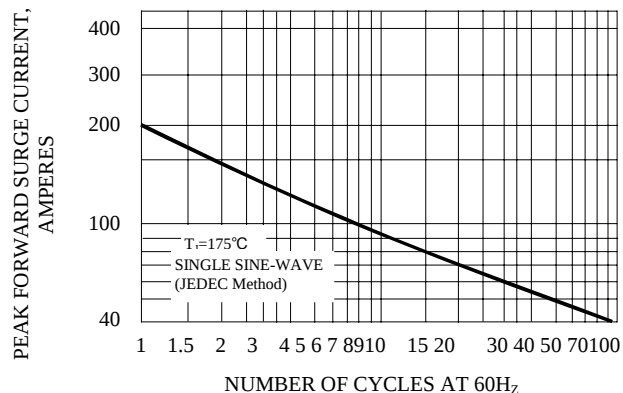


FIG. 5 - TYPICAL JUNCTION CAPACITANCE
PER BRIDGE ELEMENT

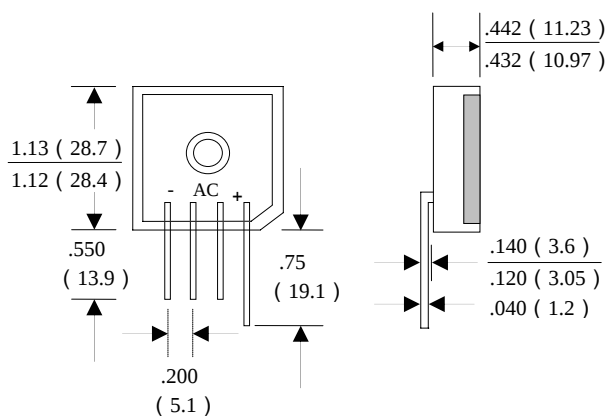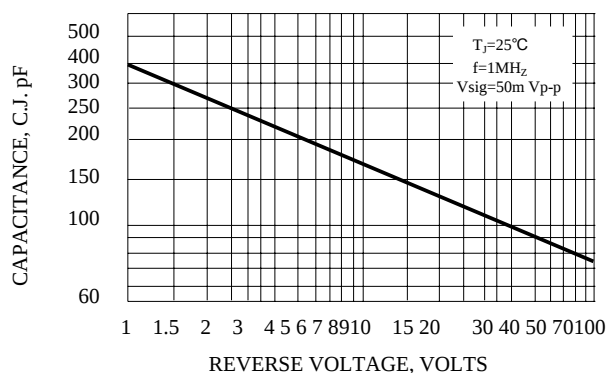

BP10-L IN LINE PIN CONFIGURATION
(PLASTIC CASE)