
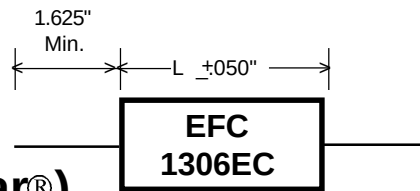


EFC**1306EC****Epoxy case
(Axial Leads)****Polyester (Mylar®)
and Foil
Capacitors**

(All dimensions in inches)

Lead Specs.

Tinned Copperweld
 Under .250D = 24 AWG
 .250 - .440D = 22 AWG
 Above .440D = 20 AWG

DIMENSIONS and RATINGS

Cap.	1306EC-1 50 VDC		1306EC-2 100 VDC		1306EC-3 150 VDC		1306EC-3 200 VDC		1306EC-3 400 VDC		1306EC-3 600 VDC	
μ F	D	L	D	L	D	L	D	L	D	L	D	L
.001	1	A	1	A	1	A	1	A	1	A	1	B
.0012	1	A	1	A	1	A	1	A	2	A	1	B
.0015	1	A	1	A	1	A	1	A	2	A	2	B
.0022	1	A	1	A	1	A	1	A	1	B	3	B
.0027	1	A	1	A	1	A	2	A	1	B	3	B
.0039	1	A	1	A	1	A	2	A	2	B	2	C
.0047	1	A	1	A	2	A	1	B	2	B	3	C
.0056	2	A	1	A	2	A	2	B	3	B	4	C
.0068	2	A	2	A	2	A	2	B	3	B	4	C
.0082	2	A	2	A	2	A	2	B	2	C	4	C
.01	1	B	2	A	1	B	2	B	3	C	4	D
.012	1	B	1	B	2	B	3	B	4	C	4	D
.015	2	B	2	B	2	B	3	B	4	C	5	D
.018	2	B	2	B	2	B	3	C	4	C	5	D
.022	2	B	2	B	3	B	3	C	4	D	5	E
.027	3	B	3	B	3	B	4	C	4	D	6	E
.033	3	B	3	B	3	C	4	C	4	D	6	E
.039	3	C	3	C	3	C	4	C	4	E	7	E
.047	3	C	3	C	4	C	4	D	4	E	7	E
.056	3	C	3	C	4	C	5	D	6	E	7	F
.068	4	C	4	C	4	C	5	D	6	E	7	F
.082	4	C	4	C	4	D	5	E	7	E		
.1	4	C	4	D	5	D	6	E	7	F		
.12	4	D	4	D	5	D	6	E	7	F		
.15	5	D	5	D	5	E	7	E				
.18	5	D	5	D	5	E	7	E				
.22	5	E	5	E	6	E	7	F				
.27	6	E	6	E	7	E						
.33	6	E	7	E	7	E						
.39	7	E	7	E	7	F						
.47	7	F	7	F	7	F						
.56	7	F	7	F								

DIAMETER

1 = .187 5 = .375
 2 = .225 6 = .437
 3 = .250 7 = .500
 4 = .312

SIZE CODE**LENGTH**

A = .375 D = .750
 B = .500 E = .875
 C = .625 F = 1.190

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705
 Phone (203) 755-5629 FAX (203) 755-0659

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.