



RoHS
Compliant
2002/95/EC







HSF

Level-1 Controlled Substances are banned

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)

P.C.B THICKNESS=1.20mm (TOLERANCE=±0.02)


WITHOUT LOCKING FUNCTION

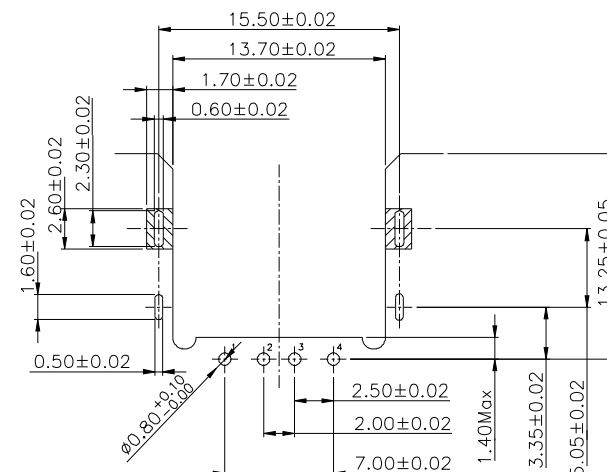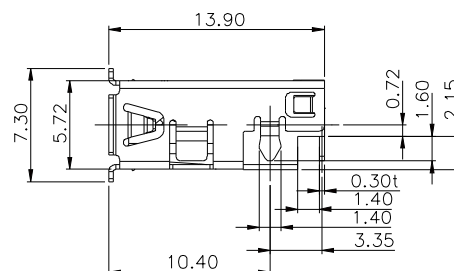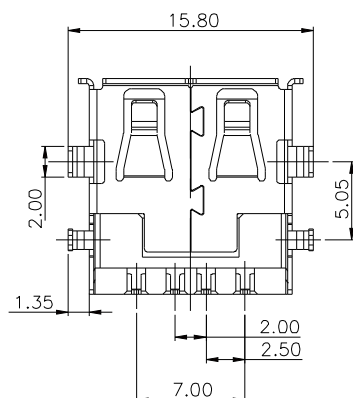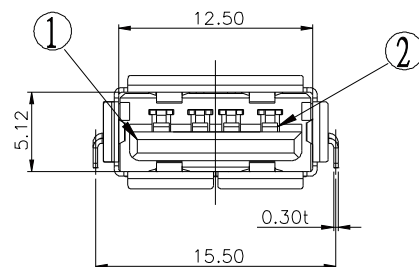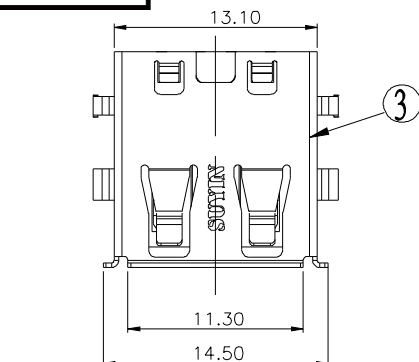

NOTE: 020173MR004 SX 1BZR

CONTACT PLATED:

- 'S1,-05u" MIN. GOLD IN CONTACT AREA/
100u" MIN. TIN IN SOLDER AREA/
- 'S2,-GOLD FLASH IN CONTACT AREA/
100u" MIN. TIN IN SOLDER AREA/
- 'S3,-10u" MIN. GOLD IN CONTACT AREA/
100u" MIN. TIN IN SOLDER AREA/
- 'S4,-15u" MIN. GOLD IN CONTACT AREA/
100u" MIN. TIN IN SOLDER AREA/
- 'S5,-30u" MIN. GOLD IN CONTACT AREA/
100u" MIN. TIN IN SOLDER AREA/
- 'S6,-50u" MIN. GOLD IN CONTACT AREA/
100u" MIN. TIN IN SOLDER AREA/

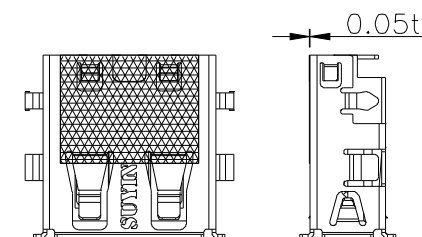

增加MYLAR示意图

3	SHELL	METAL	——	NICKEL PLATED
2	TERMINAL	COPPER ALLOY	——	GOLD/Tin PLATED
1	HOUSING	HIGH TEMP.PLASTIC	BLACK	UL 94V-0
NO. DESCRIPTION		MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY	TITLE: 4 PIN USB CONNECTOR			
PART NO.		020173MR004SX1BZR		
PRODUCT SPEC.		020173MR004XX1BXX		
FILE NAME.	DING	020173MR004SX1BZR-C		
SCALE	2:1	UNIT:mm	A4	SHEET: 1 of 2

						Angle	±2°	DRAW	陳 光	08'/07/08	
						30 ~	±0.50	DESIGN	陳 光	08'/07/08	
						10 ~ 30	±0.30	CHECK	賀南方	08'/07/08	
						~ 10	±0.15	APPRO.	謝日倉	08'/07/08	
DCBS-080403-01	PA	08'/04/03	NEWRELEASE	陳 光	謝日倉	GENERAL TOLERANCE UNLESS OTHERWISE NOTED					
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.						

Original: Draw: 賀 敏 Design: 賀 敏 Check: 劉小木 Appro: 許俊賢 發行日期: 07'/12/06

071206-BC001