

INTRODUCTION:

Adam Tech 2RS Series 2.00mm Receptacle Strips are offered in several sizes and profiles designed to satisfy most 2.00mm socket requirements. Available in Single and Dual rows, they are offered in Straight, Right Angle, SMT, Bottom Entry and Pass Through PCB mounting styles. Each type has a specially designed contact system which uses a wiping mating action and produces a high normal force connection with gold, tin or selective gold plating. All are available with Standard or Hi-Temp Thermoplastic insulators. Our SMT offering is available with optional pick and place pads and tape & reel packaging.

FEATURES:

Single and dual row in straight, right angle and SMT mounting forms
Top, side and bottom entry versions
Plated full gold, full tin or duplex plated
Five different body heights
Standard PBT insulator or optional Hi Temp insulator
Tape and reel packaging available

MATING CONNECTORS:

Adam Tech 2PH headers and all industry standard 2.0mm pin headers with a .020" [0.5mm] square pin.

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL94V-0
Optional Hi-Temp insulator: Nylon 6T, rated UL94V-0
Insulator Color: Black
Contacts: Phosphor Bronze

Contact Plating:

G = Gold flash (30u" optional) over nickel underplate overall
SG = Gold flash (30u" optional) over nickel underplate on contact area, tin over copper underplate on tails.
T = Tin over copper underplate overall

Electrical:

Operating voltage: 250V AC max.
Current rating: 1 Amp max.
Contact resistance: 20 mΩ max. initial
Insulation resistance: 5000 MΩ min.
Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 0.313 lbs per contact max.
Withdrawal force: 0.175 lbs per contact min.

Temperature Rating:

Operating temperature: -40°C to +105°C


PACKAGING:

Anti-ESD plastic trays
(Tape and Reel optional for SMT option)

SAFETY AGENCY APPROVALS:

UL Recognized File No. E224053
CSA Certified File No. LR1578596

HI-TEMP
INSULATOR
AVAILABLE

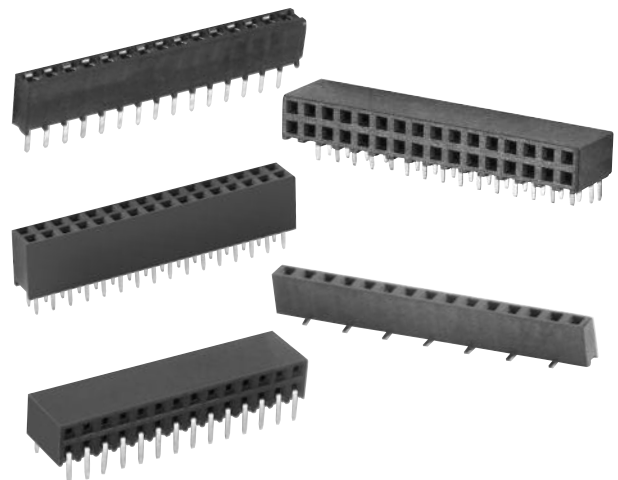

ORDERING INFORMATION

2RS1

40

G

SERIES INDICATOR

2RS1 = 2.00mm Single Row, Vertical Mount, Receptacle Strip
2RS2 = 2.00mm Dual Row, Vertical Mount, Receptacle Strip
2RS1R = 2.00mm Single Row, Right Angle, Receptacle Strip
2RS2R = 2.00mm Dual Row, Right Angle, Receptacle Strip
2RS4 = 2.00mm 4 Row, Vertical Mount, Receptacle Strip (see pg 165)
2RS2BR = 2.00mm Dual Row, Right Angle, 3-Sided Contact Receptacle Strip
2RS1H = 2.00mm Single Row, Vertical Mount, .248" Height Receptacle Strip
2RS2H = 2.00mm Dual Row, Vertical Mount, .248" Height Receptacle Strip
2RS2T = 2.00 mm Dual Row, Surface Mount, .106" Height, Top Entry Receptacle Strip
2RS2B = 2.00mm Dual Row, Surface Mount, .106" Height, Bottom Entry Receptacle Strip

PLATING

G = Gold plated
SG = Gold plated contact area, tin plated solder tails
T = Tin plated

POSITIONS

Single Row: 2 thru 40
Dual Row: 4 thru 80
Four Row: 8 thru 120

OPTIONS:

Add designator(s) to end of part number
30 = 30 pin gold plating in contact area
SMT = SMT leads with Hi-Temp insulator dual row
SMT-A = SMT Single Row Type A with Hi-Temp insulator
SMT-B = SMT Single Row Type B with Hi-Temp insulator
P = Optional guide peg on SMT version
PP = Pick and place pad
HT = Hi-Temp insulator for Hi-Temp soldering processes up to 260°C (Add this option for thru-hole products only.
All SMT products are manufactured with Hi-Temp insulators)