


2.0mm DUAL ROW HEADER

STRAIGHT P.C.B. MOUNT TYPE

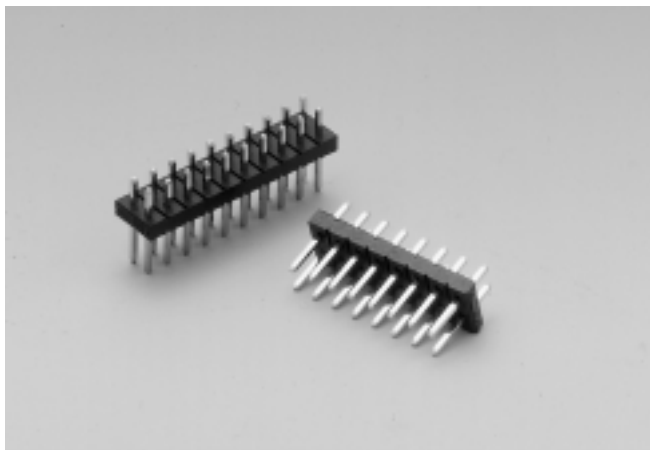


200112MS Series

Mates With SUYIN200124,200132,200133,200135,200136,200248,200188 Series

Specifications:

- 4-80 Circuits
- Insulator Material : Black High Temp . Plastic
- Operating Temp.Range : -40°C to +105°C
- Terminal Material : Brass 65/35
- Plating : Contact-Selective Gold Plated or Full Gold Plated
- Max. Current Rating : 1.5A
- Voltage Rating : 150V AC
- Dielectric Strength : 500V (Min. 60 Seconds)

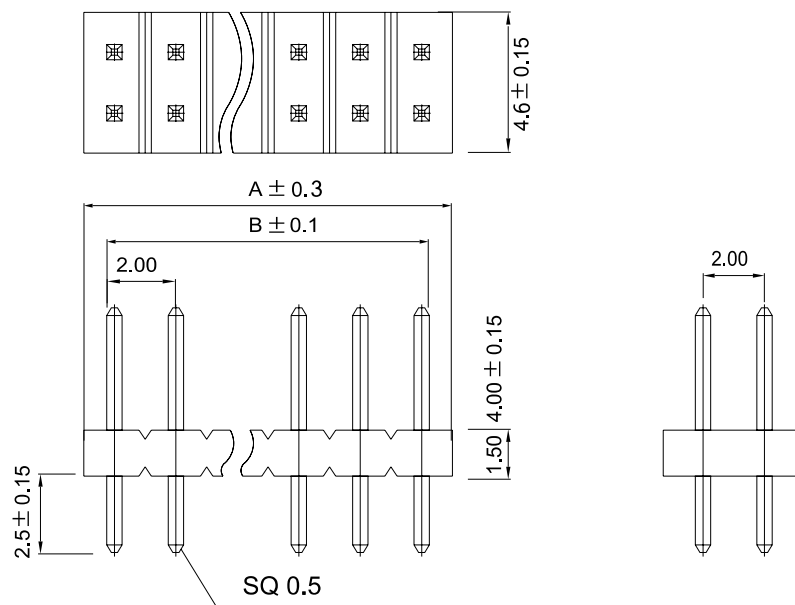

Order Information

200112MS□□□□00ZU
1 2 3 4 5

1. 'S' : Straight DIP Type

2. No. of Pins

3. Plating


4. Color 'Z' : Black

5. Package

'U' : Tube Package Without CAP

Reference Page 11

Recommended P.C.B Layout

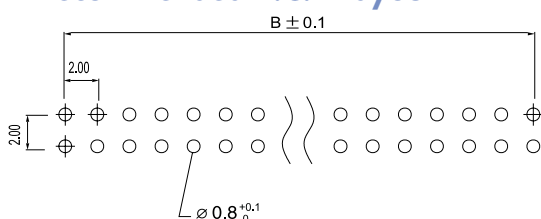

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200112MS004□□00ZU	4.3	2.0	200112MS030□□00ZU	30.3	28.0
200112MS006□□00ZU	6.3	4.0	200112MS034□□00ZU	34.3	32.0
200112MS008□□00ZU	8.3	6.0	200112MS040□□00ZU	40.3	38.0
200112MS010□□00ZU	10.3	8.0	200112MS044□□00ZU	44.3	42.0
200112MS012□□00ZU	12.3	10.0	200112MS050□□00ZU	50.3	48.0
200112MS014□□00ZU	14.3	12.0	200112MS060□□00ZU	60.3	58.0
200112MS016□□00ZU	16.3	14.0	200112MS064□□00ZU	64.3	62.0
200112MS020□□00ZU	20.3	18.0	200112MS068□□00ZU	68.3	66.0
200112MS024□□00ZU	24.3	22.0	200112MS070□□00ZU	70.3	68.0
200112MS026□□00ZU	26.3	24.0	200112MS080□□00ZU	80.3	78.0