

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015060041](#)
Status: **Active**
Overview: [minifit_bmi](#)
Description: 4.20mm (.165") Pitch Mini-Fit BMI™ Receptacle Housing, Dual Row with Panel Mount Ears, PA Polyamide Nylon 6/6, UL 94V-0, 4 Circuits

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)

[Product Specification PS-5556-002 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	Crimp Housings
Series	42474
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 series terminals crimped to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current de-rating information.
Overview	minifit_bmi
Product Name	Mini-Fit BMI™

Physical

Breakaway	No
Circuits (maximum)	4
Color - Resin	Natural (White)
Flammability	94V-0, 94V-2
Gender	Female
Glow-Wire Compliant	No
Lock to Mating Part	None
Material - Resin	Nylon
Number of Rows	2
Packaging Type	Bag
Panel Mount	Yes
Pitch - Mating Interface (in)	0.165 In
Pitch - Mating Interface (mm)	4.20 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical

Current - Maximum per Contact	13A
-------------------------------	-----

Material Info

Old Part Number	42474-0421
-----------------	------------

Reference - Drawing Numbers

Packaging Specification	PK-42474-001
Product Specification	PS-5556-002
Sales Drawing	SD-42474-****
Test Summary	TS-5556-002

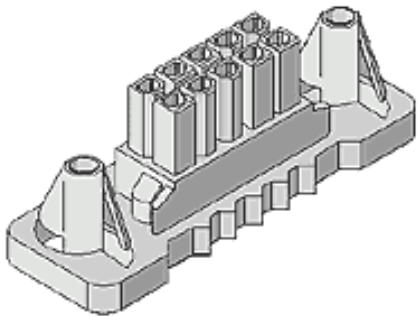


image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Halogen-Free

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

China RoHS



Search Parts in this Series

[42474Series](#)

Mates With


[42475](#) Mini-Fit BMI™ Plug Housing. [43879](#) MiniFit CPI™ Header. Mini-Fit BMI™ Header [42404](#) , [42440](#). Mini-Fit SMC™ Surface Mount Compatible Header [43810](#) , [44068](#)

Use With



[5556](#) Mini-Fit™ Crimp Terminal

This document was generated on 05/27/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION




SECTION "A-A"
TERMINAL ORIENTATION

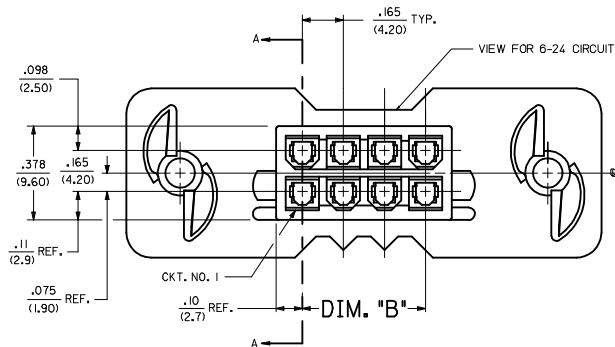

THIS AREA CAN BE
SHARP OR RADIUS

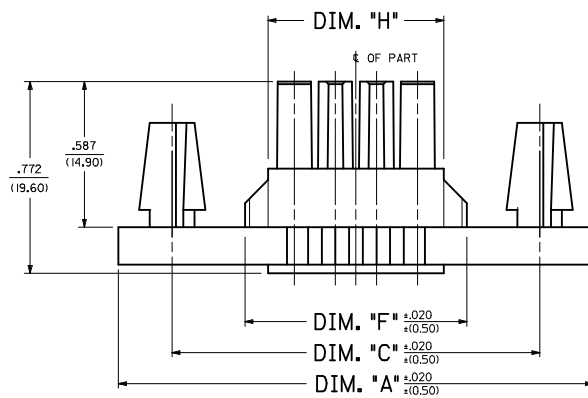

2-8 & 12-24 CIRCUIT HEADER
(SEE SHEET 2 FOR 10 CIRCUIT HEADER DESIGN)

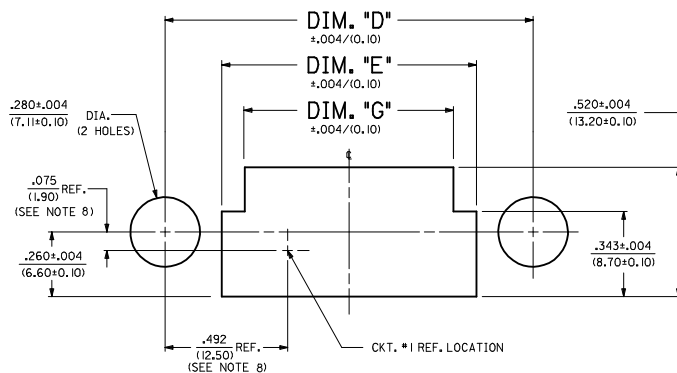

RECOMMENDED PANEL CUT-OUT FOR .050±.012/(1.27±0.30) THICK PANEL
(SEE NOTE 11)

LEGEND:

42474 - ** * I
BASE NUMBER
CIRCUIT SIZE
(02-24)
MATERIAL
(SEE NOTE 1.)


CKT. SIZE	DIM. 'A'	DIM. 'B'	DIM. 'C'	DIM. 'D'	DIM. 'E'	DIM. 'F'	DIM. 'G'	DIM. 'H'
2	.1417 (36.00)	N/A	.984 (25.00)	.984 (25.00)	.528 (13.40)	.398 (10.10)	.343 (8.70)	.213 (5.40)
4	.1583 (40.20)	.165 (4.20)	.150 (38.10)	.150 (38.10)	.593 (15.00)	.563 (14.30)	.508 (12.90)	.378 (9.60)
6	.1748 (44.40)	.331 (8.40)	.135 (33.40)	.135 (33.40)	.778 (19.80)	.748 (19.00)	.673 (17.10)	.543 (13.80)
8	.1913 (48.60)	.496 (12.60)	.140 (35.60)	.140 (35.60)	1.024 (26.00)	.894 (22.70)	.839 (21.30)	.709 (18.00)
10	.2078 (52.80)	.651 (16.60)	.145 (36.80)	.145 (36.80)	1.189 (30.20)	1.059 (26.90)	1.004 (25.50)	.874 (22.20)
12	.2244 (57.00)	.827 (21.00)	.181 (46.00)	.181 (46.00)	1.354 (34.40)	1.224 (31.10)	1.169 (29.70)	1.039 (26.40)
14	.2409 (61.20)	.992 (25.20)	.196 (50.20)	.196 (50.20)	1.520 (38.60)	1.390 (35.30)	1.335 (33.90)	1.205 (30.60)
16	.2575 (65.40)	1.157 (29.40)	.212 (54.40)	.212 (54.40)	1.685 (42.80)	1.555 (39.50)	1.500 (38.10)	1.370 (34.80)
18	.2740 (69.60)	1.323 (33.60)	.2307 (58.60)	.2307 (58.60)	1.850 (47.00)	1.720 (43.70)	1.665 (42.30)	1.535 (39.00)
20	.2906 (73.80)	1.488 (37.80)	.2472 (62.80)	.2472 (62.80)	2.016 (51.20)	1.886 (47.90)	1.831 (46.50)	1.701 (43.20)
22	.3071 (78.00)	1.653 (42.00)	.2638 (67.00)	.2638 (67.00)	2.181 (55.40)	2.051 (52.10)	1.996 (50.70)	1.866 (47.40)
24	.3236 (82.20)	1.819 (46.20)	.2803 (71.20)	.2803 (71.20)	2.346 (59.60)	2.217 (56.30)	2.161 (54.90)	2.031 (51.60)

NOTES:

- MATERIAL:
*1 = NYLON 6/6, 94V-2, COLOR: NATURAL.
*2 = NYLON 6/6, 94V-0, COLOR: NATURAL.
*3 = NYLON 6/6, 94V-2, COLOR: BLACK.
*4 = NYLON 6/6, 94V-0, COLOR: BLACK.
- FINISH: NOT APPLICABLE.
- PRODUCT SPECIFICATION: PS-5556-002
- PACKAGING: PK-42474-001.
- PART MATES WITH MINI-FIT B.M.I. PLUG *42475, AND HEADERS 42404, 42440, 43810, 44068 & 43879.
- PART TO BE USED WITH MOLEX FEMALE TERMINAL *5556.
- THIS CONNECTOR ALLOWS FOR .050/(1.27) MAX. MISALIGNMENT IN ANY DIRECTION.
- THIS DIMENSION TO BE USED FOR ALIGNMENT OF THE MATING CONNECTOR.
- CONNECTOR ASSEMBLIES ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
- THIS PART IS INTENDED FOR ONE PANEL INSERTION ONLY. REMOVAL AND RE-INSERTION CAN DAMAGE THE MOUNTING SPIRALS.
- PANEL SHOULD BE PUNCHED IN THE DIRECTION OF CONNECTOR INSERTION.
- BOTH SPIRALS SHOULD BE INSERTED INTO THE PANEL AT THE SAME TIME. ROCKING THE PART INTO PLACE MAY CAUSE SPIRAL DAMAGE.
- THIS PART IS NOT INTENDED TO PROVIDE ANY ALIGNMENT OF CUSTOMER COMPONENTS OR MODULES, SUCH AS POWER SUPPLIES AND CHASSIS.
- IF THIS PRODUCT IS STORED IN AN ENVIRONMENT WITH A RELATIVE HUMIDITY OF LESS THAN 50%, MOISTURE MUST BE ADDED.
REFER TO TECHNICAL ADVISORY AS-45499-001 FOR INSTRUCTIONS.
- A MAXIMUM TOLERANCE OF .050/(1.27) ALLOWS FOR 2 POINTS OF ELECTRICAL CONTACT.
A MAXIMUM TOLERANCE OF .020/(.51) ALLOWS FOR 4 POINTS OF CONTACT.
- WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET.
- PART CONFORMS TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

CORRECTED REF NOTE EC NO: UCP2010-0135 DRAWN: J.BELL CHKD: J.BELL APPR: FSW TH REV P4	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		mm	INCH	DRAWN BY GEP	DATE 1989/08/24	TITLE PANEL-MOUNT RECEPTACLE BLIND MATE MINI-FIT JR. SERIES					
		4 PLACES ± ---	± ---	CHECKED BY R.J.F.	DATE 1989/08/24	MOLEX INCORPORATED					
		3 PLACES ± ---	± .015	APPROVED BY RAS	DATE 1989/08/24	SD-42474-****					
		2 PLACES ± 0.38									
		1 PLACE ± ---									
		ANGULAR ±1/2°									
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE SHEET 2		DOCUMENT NO. SD-42474-****		SHEET NO. 1 OF 2			
				SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

13		12		11		10		9		8		7		6		5		4		3		2		1			
PART NUMBER		ENG. NUMBER		CKT. SIZE		MATERIAL (SEE NOTE 1.)		PART NUMBER		ENG. NUMBER		CKT. SIZE		MATERIAL (SEE NOTE 1.)		ITEM NUMBER		CKT. SIZE		MATERIAL (SEE NOTE 1.)		ITEM NUMBER		CKT. SIZE		MATERIAL (SEE NOTE 1.)	
J	NOT TOOLED	42474-0211	2	94V-2		NOT TOOLED	42474-0221	2	94V-0	NOT TOOLED	42474-0431	4	94V-2	NOT TOOLED	2	94V-2	NOT TOOLED	2	94V-0								
	I5-06-0040	42474-0411	4	94V-2		I5-06-0041	42474-0421	4	94V-0	I5-06-0060	42474-0611	6	94V-2	I5-06-0080	42474-0811	8	94V-2	I5-06-0100	42474-1011	10	94V-2						
	I5-06-0060	42474-0611	6	94V-2		I5-06-0080	42474-0811	8	94V-2	I5-06-0100	42474-1011	10	94V-2	NOT TOOLED	42474-1211	12	94V-2	I5-06-0140	42474-1411	14	94V-2						
	I5-06-0080	42474-0811	8	94V-2		I5-06-0100	42474-1011	10	94V-2	NOT TOOLED	42474-1211	12	94V-2	I5-06-0140	42474-1411	14	94V-2	NOT TOOLED	42474-1611	16	94V-2						
I	I5-06-0100	42474-1011	10	94V-2	I5-06-0101	42474-1021	10	94V-0	NOT TOOLED	42474-1221	12	94V-0	NOT TOOLED	42474-1431	14	94V-2	NOT TOOLED	42474-1631	16	94V-2	NOT TOOLED	42474-1841	18	94V-0			
	NOT TOOLED	42474-1211	12	94V-2	NOT TOOLED	42474-1221	12	94V-0	NOT TOOLED	42474-1421	14	94V-0	NOT TOOLED	42474-1621	16	94V-0	NOT TOOLED	42474-1831	18	94V-2	NOT TOOLED	42474-2011	20	94V-0			
	I5-06-0140	42474-1411	14	94V-2	I5-06-0141	42474-1421	14	94V-0	NOT TOOLED	42474-1621	16	94V-0	NOT TOOLED	42474-1821	18	94V-0	NOT TOOLED	42474-2021	20	94V-0	NOT TOOLED	42474-2211	22	94V-0			
	NOT TOOLED	42474-1611	16	94V-2	NOT TOOLED	42474-1621	16	94V-0	NOT TOOLED	42474-1821	18	94V-0	NOT TOOLED	42474-2021	20	94V-0	NOT TOOLED	42474-2221	22	94V-0	I5-06-0240	42474-2411	24	94V-2			
H	I5-06-0180	42474-1811	18	94V-2	I5-06-0181	42474-1821	18	94V-0	NOT TOOLED	42474-2021	20	94V-0	NOT TOOLED	42474-2231	22	94V-2	NOT TOOLED	42474-2431	24	94V-2	NOT TOOLED	42474-2611	26	94V-0			
	NOT TOOLED	42474-2011	20	94V-2	NOT TOOLED	42474-2021	20	94V-0	NOT TOOLED	42474-2221	22	94V-0	NOT TOOLED	42474-2421	24	94V-0	NOT TOOLED	42474-2621	26	94V-0	NOT TOOLED	42474-2811	28	94V-0			
	NOT TOOLED	42474-2211	22	94V-2	NOT TOOLED	42474-2221	22	94V-0	NOT TOOLED	42474-2421	24	94V-0	NOT TOOLED	42474-2621	26	94V-0	NOT TOOLED	42474-2821	28	94V-0	NOT TOOLED	42474-3011	30	94V-0			
	I5-06-0240	42474-2411	24	94V-2	I5-06-0241	42474-2421	24	94V-0	I5-06-0260	42474-2611	26	94V-0	I5-06-0280	42474-2811	28	94V-0	I5-06-0300	42474-3011	30	94V-0	I5-06-0320	42474-3211	32	94V-0			

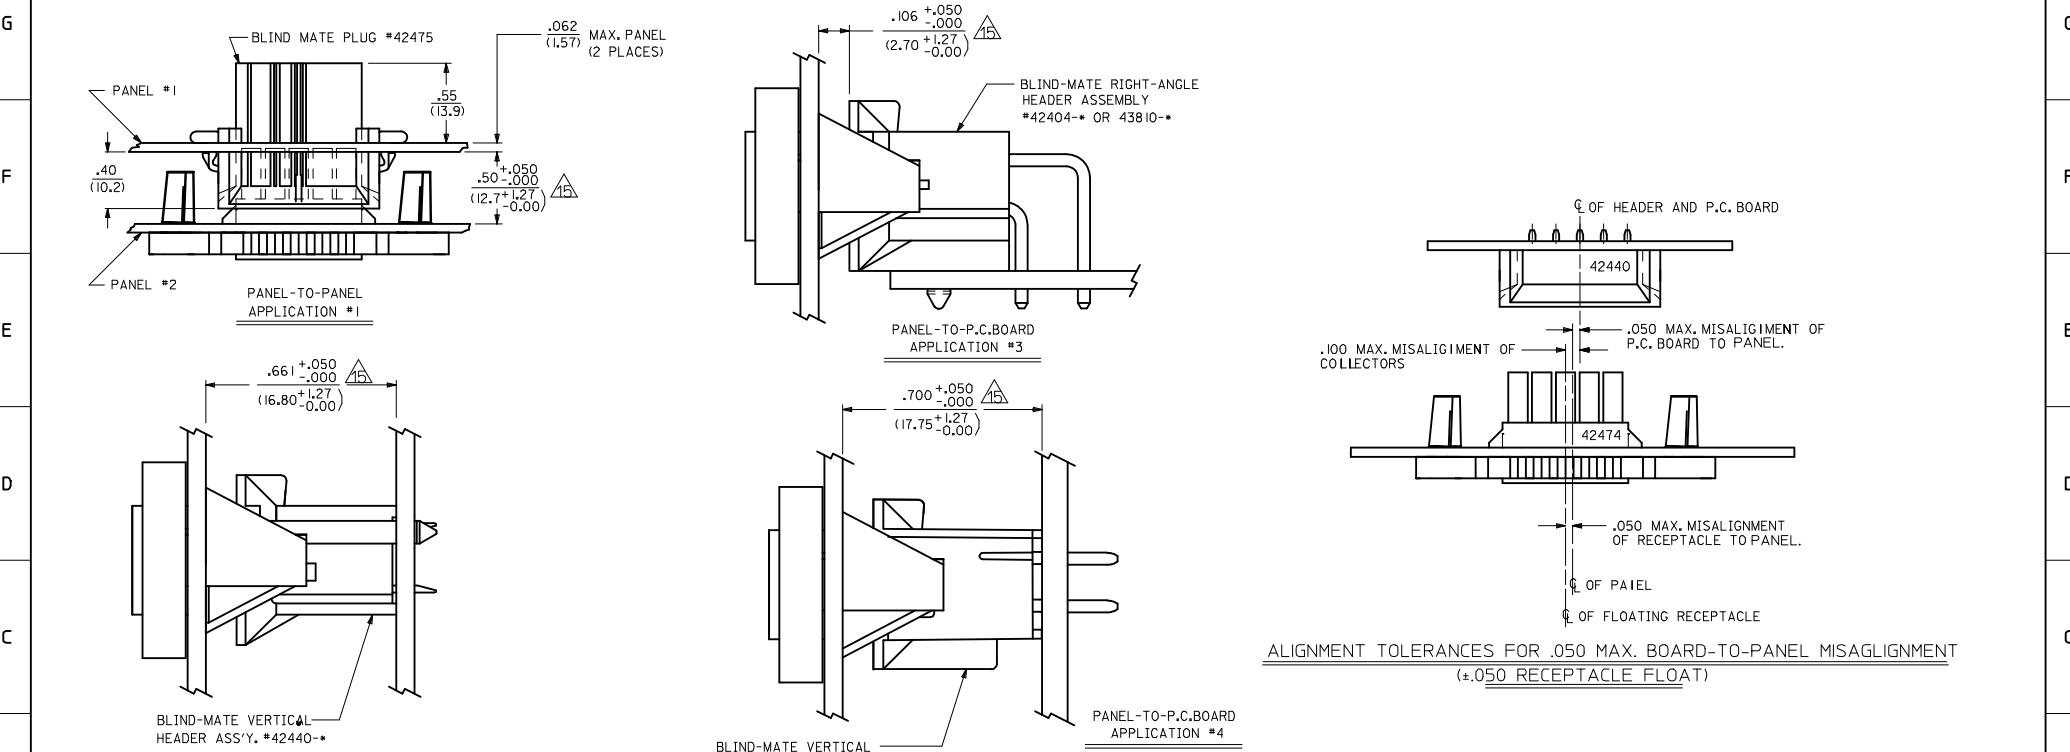

CORRECTED TEXT EC NO: UCP2010-0135 DRWN:JBELL 2009/07/17 CHKD:JBELL 2009/07/22 APPR:FSMITH 2009/07/23		QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± 5 °	DIMENSION STYLE IN/MM DRAWN BY DATE LEM 1999/03/24 CHECKED BY DATE MB 1999/03/24 APPROVED BY DATE RE 1999/03/24	SCALE 1:1 DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	PANEL-MOUNT RECEPTACLE BLIND MATE MINI-FIT JR. SERIES	
P4		REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-42474-****	SHEET NO. 2 OF 2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	