

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0039293106

Status:


Active

Overview:

[minifit_jr](#)

Description:

4.20mm (.165") Pitch Mini-Fit Jr.™ Header, Dual Row, Vertical, without Snap-in Plastic Peg PCB Lock, 10 Circuits, PA Polyamide Nylon 6/6 94V-2, Tin (Sn) Plating, with Drain Holes

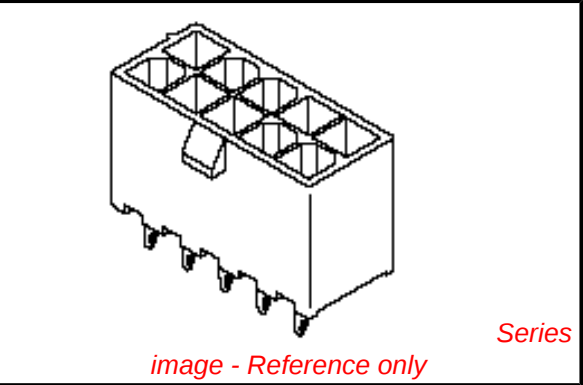

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification		
CSA	LR19980	
TUV	R72081037	
UL	E29179	
General		
Product Family	PCB Headers	
Series	5566	
Application	Wire-to-Board	
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS™ Crimp Terminal Crimped to to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current de-rating information.. High Temperature, Square Pin, Solder Type	
Overview	minifit_jr	
Product Name	Mini-Fit Jr.™	
Physical		
Breakaway	No	
Circuits (Loaded)	10	
Circuits (maximum)	10	
Color - Resin	Natural	
Durability (mating cycles max)	30	
First Mate / Last Break	No	
Flammability	94V-2	
Glow-Wire Compliant	No	
Guide to Mating Part	No	
Keying to Mating Part	None	
Lock to Mating Part	Yes	
Material - Metal	Brass	
Material - Plating Mating	Gold	
Material - Plating Termination	Tin	
Material - Resin	Nylon	
Number of Rows	2	
Orientation	Vertical	
PC Tail Length (in)	0.138 In	
PC Tail Length (mm)	3.50 mm	
PCB Locator	Yes	
PCB Retention	None	
PCB Thickness Recommended (in)	0.062 In	
PCB Thickness Recommended (mm)	1.60 mm	
Packaging Type	Bag	
Pitch - Mating Interface (in)	0.165 In	
Pitch - Mating Interface (mm)	4.20 mm	

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

5566Series

Mates With

5557 Mini-Fit Jr.™ Receptacle Housing

Pitch - Term. Interface (in)	0.165 In
Pitch - Term. Interface (mm)	4.20 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.54
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	13A
Voltage - Maximum	600V
Material Info	
Old Part Number	5566-10B
Reference - Drawing Numbers	
Packaging Specification	PK-5566
Sales Drawing	SD-5566-002

This document was generated on 05/21/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

CIRCUIT SIZE	DIM. "A"	DIM. "B"
2	.21 (5.4)	—
4	.38 (9.6)	.17 (4.2)
6	.54 (13.8)	.33 (8.4)
8	.71 (18.0)	.50 (12.6)
10	.87 (22.2)	.66 (16.8)
12	1.04 (26.4)	.83 (21.0)
14	1.20 (30.6)	.99 (25.2)
16	1.37 (34.8)	1.16 (29.4)
18	1.54 (39.0)	1.32 (33.6)
20	1.70 (43.2)	1.49 (37.8)
22	1.87 (47.4)	1.65 (42.0)
24	2.03 (51.6)	1.82 (46.2)

LEGEND

BASE NUMBER 5566 - N * * * * *

CIRCUIT SIZE

ASS'Y TYPE
A : WITHOUT DRAIN HOLES
B : WITH DRAIN HOLES

TERMINAL MATERIAL
SEE NOTE 1

TERMINAL PLATING
SEE NOTE 2

HOUSING MATERIAL
SEE NOTE 1

COLOR OR PACKAGING
BL : BLACK RE : RED GR : GRAY
BU : BLUE YE : YELLOW GRE : GREEN
TA : TRAY PACKAGING SEE NOTE 4

NOTES:

1. MATERIALS:

HOUSING:

'BLANK'=NYLON 6/6, UL94V-2, COLOR: NATURAL

210=NYLON 6/6, UL94V-0, COLOR: NATURAL

400=NYLON 6/6, UL94V-0, COLOR: BLACK

TERMINALS:

BLANK = BRASS

PB = PHOSPHOR BRONZE

2. TERMINAL PLATING:

BLANK = BRIGHT TIN .000035/(0.00090) MIN.

OVER COPPER .000020/(0.00050) MIN. (BRASS)

TIN .000035/(0.00090) MIN. REFLOW TREATMENT

OR BRIGHT TIN .000035/(0.00090) MIN. (PHOSPHOR BRONZE)

S=.000100/(0.00254) MIN. BRIGHT TIN OVER

.000050/(0.00127) MIN. NICKEL

GS2=.000015/(0.00038) MIN. SELECT GOLD AND

.000100/(0.00254) MIN. SELECT MATTE TIN

OVER .000050/(0.00127) MIN. NICKEL OVERALL

GS=.000030/(0.00076) MIN. SELECT GOLD AND

.000100/(0.00254) MIN. SELECT MATTE TIN

OVER .000050/(0.00127) MIN. NICKEL OVERALL

3. PRODUCT SPECIFICATION: PS-5556-001

4. PACKAGING: *BLANK*= BULK PACKED, *TA*=TRAY PACK PER PK-5566-001

5. PART MATES WITH MINI-FIT JR. RECEPTACLE NO. 5557.



6. PART IS NOT DESIGNED FOR CURRENT SHARING.

7. PARTS ARE NOT DESIGNED TO BE MATED OR UN-MATED


WHILE CIRCUITS ARE LIVE.

⚠ ANTI-SHINGLING RIB MAY OR MAY NOT APPEAR ON HOUSINGS.

9. PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

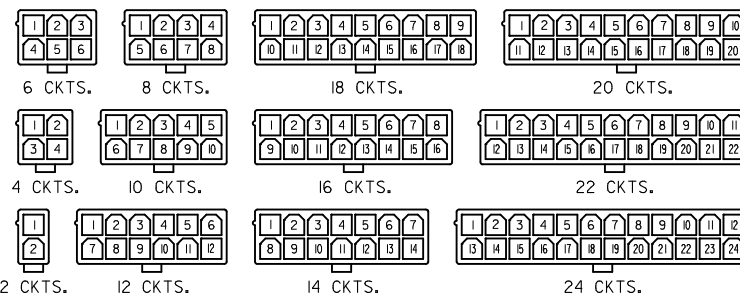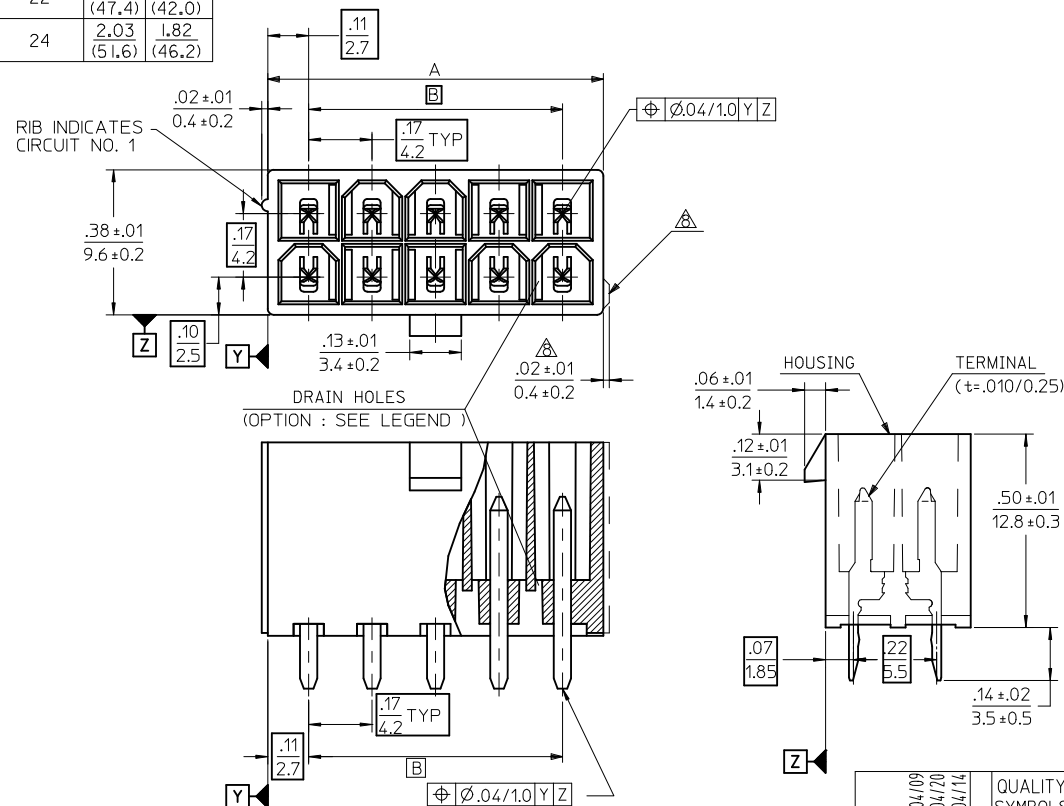

CIRCUIT SIZE LAYOUT

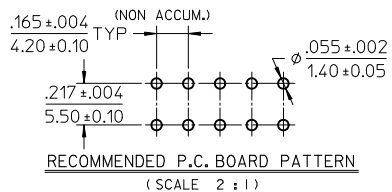

CORRECTED PN EC NO: UCP2010-2614 L3 DRWN: JAGUILAR CHKD: J.BELL APPR: F.S.MITH REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
			mm		INCH		DRAWN BY H.HIRAMOTO	DATE '89/04/03	NEW MINI FIT CONNECTOR HEADER HOUSING ASS'Y -LEAD FREE-			
			4 PLACES ± ---		± ---		CHECKED BY M.FUKUSHIMA				DATE '94/04/20	
			3 PLACES ± ---		± .005		APPROVED BY M.FUKUSHIMA				DATE '94/04/20	
			2 PLACES ± .13		± .010		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-5566-002			
			1 PLACE ± .25		± ---							
			ANGULAR ± 3 °									
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									
							SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
									SHEET NO. 1 OF 6			

F	10	9	8	7	6	5	4	3	2	1		
	39-30-9247	5566-24BGS2-2 IO	39-31-0248	5566-24BGS-2 IO	39-31-0242	5566-24BS-2 IO	39-31-0240	5566-24B-2 IO	39-30-6244	5566-24APBS-2 IO	24	
	▲ -9227	▲ -22BGS2-2 IO	▲ -0228	▲ -22BGS-2 IO	▲ -0222	▲ -22BS-2 IO	▲ -0220	▲ -22B-2 IO	▲ -6224	▲ -22APBS-2 IO	22	
	-9207	-20BGS2-2 IO	-0208	-20BGS-2 IO	-0202	-20BS-2 IO	-0200	-20B-2 IO	-6204	-20APBS-2 IO	20	
	-9187	-18BGS2-2 IO	-0188	-18BGS-2 IO	-0182	-18BS-2 IO	-0180	-18B-2 IO	-6184	-18APBS-2 IO	18	
	-9167	-16BGS2-2 IO	-0168	-16BGS-2 IO	-0162	-16BS-2 IO	-0160	-16B-2 IO	-6164	-16APBS-2 IO	16	
	-9147	-14BGS2-2 IO	-0148	-14BGS-2 IO	-0142	-14BS-2 IO	-0140	-14B-2 IO	-6144	-14APBS-2 IO	14	
	-9127	-12BGS2-2 IO	-0128	-12BGS-2 IO	-0122	-12BS-2 IO	-0120	-12B-2 IO	-6124	-12APBS-2 IO	12	
	-9107	-10BGS2-2 IO	-0108	-10BGS-2 IO	-0102	-10BS-2 IO	-0100	-10B-2 IO	-6104	-10APBS-2 IO	10	
	-9087	-08BGS2-2 IO	-0088	-08BGS-2 IO	-0082	-08BS-2 IO	-0080	-08B-2 IO	-6084	-08APBS-2 IO	8	
	-9067	-06BGS2-2 IO	-0068	-06BGS-2 IO	-0062	-06BS-2 IO	-0060	-06B-2 IO	-6064	-06APBS-2 IO	6	
	▼ -9047	▼ -04BGS2-2 IO	▼ -0048	▼ -04BGS-2 IO	▼ -0042	▼ -04BS-2 IO	▼ -0040	▼ -04B-2 IO	▼ -6044	▼ -04APBS-2 IO	4	
39-30-9027	5566-02BGS2-2 IO	39-31-0028	5566-02BGS-2 IO	39-31-0022	5566-02BS-2 IO	39-31-0020	5566-02B-2 IO	39-30-6024	5566-02APBS-2 IO	2		
E	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	
	5566-NBGS2-2 IO		5566-NBGS-2 IO		5566-NBS-2 IO		5566-NB-2 IO		5566-NAPBS-2 IO			
	39-30-9246	5566-24BGS2	39-31-0247	5566-24BGS	39-31-0241	5566-24BS	39-29-3246	5566-24B	39-30-6243	5566-24APBS	24	
	▲ -9226	▲ -22BGS2	▲ -0227	▲ -22BGS	▲ -0221	▲ -22BS	▲ -3226	▲ -22B	▲ -6223	▲ -22APBS	22	
	-9206	-20BGS2	-0207	-20BGS	-0201	-20BS	-3206	-20B	-6203	-20APBS	20	
	-9186	-18BGS2	-0187	-18BGS	-0181	-18BS	-3186	-18B	-6183	-18APBS	18	
	-9166	-16BGS2	-0167	-16BGS	-0161	-16BS	-3166	-16B	-6163	-16APBS	16	
	-9146	-14BGS2	-0147	-14BGS	-0141	-14BS	-3146	-14B	-6143	-14APBS	14	
	-9126	-12BGS2	-0127	-12BGS	-0121	-12BS	-3126	-12B	-6123	-12APBS	12	
	-9106	-10BGS2	-0107	-10BGS	-0101	-10BS	-3106	-10B	-6103	-10APBS	10	
	-9086	-08BGS2	-0087	-08BGS	-0081	-08BS	-3086	-08B	-6083	-08APBS	8	
	-9066	-06BGS2	-0067	-06BGS	-0061	-06BS	-3066	-06B	-6063	-06APBS	6	
▼ -9046	▼ -04BGS2	▼ -0047	▼ -04BGS	▼ -0041	▼ -04BS	▼ -3046	▼ -04B	▼ -6043	▼ -04APBS	4		
39-30-9026	5566-02BGS2	39-31-0027	5566-02BGS	39-31-0021	5566-02BS	39-29-3026	5566-02B	39-30-6023	5566-02APBS	2		
D	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	
	5566-NBGS2		5566-NBGS		5566-NBS		5566-NB		5566-NAPBS			
	39-31-0245	5566-24BPBS	39-31-0243	5566-24BPB	39-31-0246	5566-24BPBS-2 IO	39-31-0244	5566-24BPB-2 IO	24			
	▲ -0225	▲ -22BPBS	▲ -0223	▲ -22BPB	▲ -0226	▲ -22BPBS-2 IO	▲ -0224	▲ -22BPB-2 IO	22			
	-0205	-20BPBS	-0203	-20BPB	-0206	-20BPBS-2 IO	-0204	-20BPB-2 IO	20			
	-0185	-18BPBS	-0183	-18BPB	-0186	-18BPBS-2 IO	-0184	-18BPB-2 IO	18			
	-0165	-16BPBS	-0163	-16BPB	-0166	-16BPBS-2 IO	-0164	-16BPB-2 IO	16			
	-0145	-14BPBS	-0143	-14BPB	-0146	-14BPBS-2 IO	-0144	-14BPB-2 IO	14			
	-0125	-12BPBS	-0123	-12BPB	-0126	-12BPBS-2 IO	-0124	-12BPB-2 IO	12			
	-0105	-10BPBS	-0103	-10BPB	-0106	-10BPBS-2 IO	-0104	-10BPB-2 IO	10			
	-0085	-08BPBS	-0083	-08BPB	-0086	-08BPBS-2 IO	-0084	-08BPB-2 IO	8			
	-0065	-06BPBS	-0063	-06BPB	-0066	-06BPBS-2 IO	-0064	-06BPB-2 IO	6			
▼ -0045	▼ -04BPBS	▼ -0043	▼ -04BPB	▼ -0046	▼ -04BPBS-2 IO	▼ -0044	▼ -04BPB-2 IO	4				
39-31-0025	5566-02BPBS	39-31-0023	5566-02BPB	39-31-0026	5566-02BPBS-2 IO	39-31-0024	5566-02BPB-2 IO	2				
C	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	
	5566-NBPBS		5566-NBPB		5566-NBPBS-2 IO		5566-NBPB-2 IO					
	PARTS WITH DRAIN HOLES											
	B	SEE SHEET 1										
		GENERAL TOLERANCES (UNLESS SPECIFIED)										
		DIMENSION STYLE IN/MM										
		SCALE ---										
		DESIGN UNITS METRIC										
		THIRD ANGLE PROJECTION										
		DRAWN BY H.HIRAMOTO DATE '89/04/03										
		CHECKED BY M.FUKUSHIMA DATE '94/04/20										
		APPROVED BY M.FUKUSHIMA DATE '94/04/20										
MATERIAL NO. SEE TABLE												
DOCUMENT NO. SD-5566-002												
SHEET NO. 3 OF 6												
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												