



1214-110M

110 Watts - 50 Volts, 330 μ s, 10%
Radar 1200 - 1400 MHz

GENERAL DESCRIPTION

The 1214-110M is an internally matched, COMMON BASE transistor capable of providing 110 Watts of pulsed RF output power at 330 μ s pulse width, 10% duty factor across the band 1200 to 1400 MHz. This hermetically solder-sealed transistor is specifically designed for L-Band radar applications. It utilizes gold metallization and diffused emitter ballasting to provide high reliability and supreme ruggedness.

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C 270 Watts


Maximum Voltage and Current

BVces	Collector to Emitter Voltage	75 Volts
BVebo	Emitter to Base Voltage	3.0 Volts
Ic	Collector Current	8 Amps

Maximum Temperatures

Storage Temperature	- 65 to + 200°C
Operating Junction Temperature	+ 200°C

CASE OUTLINE 55KT, STYLE 1

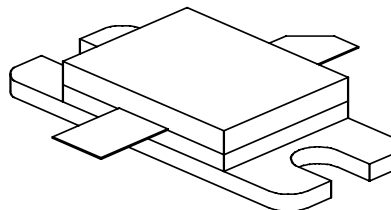

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	Freq = 1200 – 1400 MHz	110		170	Watts
Pg	Power Gain	Vcc = 50 Volts	7.4			dB
ηc	Collector Efficiency	Pin = 20 Watts	50	55		%
RI	Input Return loss	Pulse Width = 330 μ s	10			dB
Droop	Droop	Duty Factor = 10%			0.5	dB
Flatness	Flatness				1.25	dB
VSWR¹	Load Mismatch Tolerance				3:1	
VSWRs	Load Mismatch - Stability				1.5:1	


FUNCTIONAL CHARACTERISTICS @ 25°C

Bvces	Collector to Emitter Breakdown	Ic = 100 mA	75			Volts
Ices	Collector to Emitter Leakage	Vce = 50 Volts			10	mA
θjc¹	Thermal Resistance	Rated Pulse Condition			0.65	°C/W




1214-110M

Performance Curves


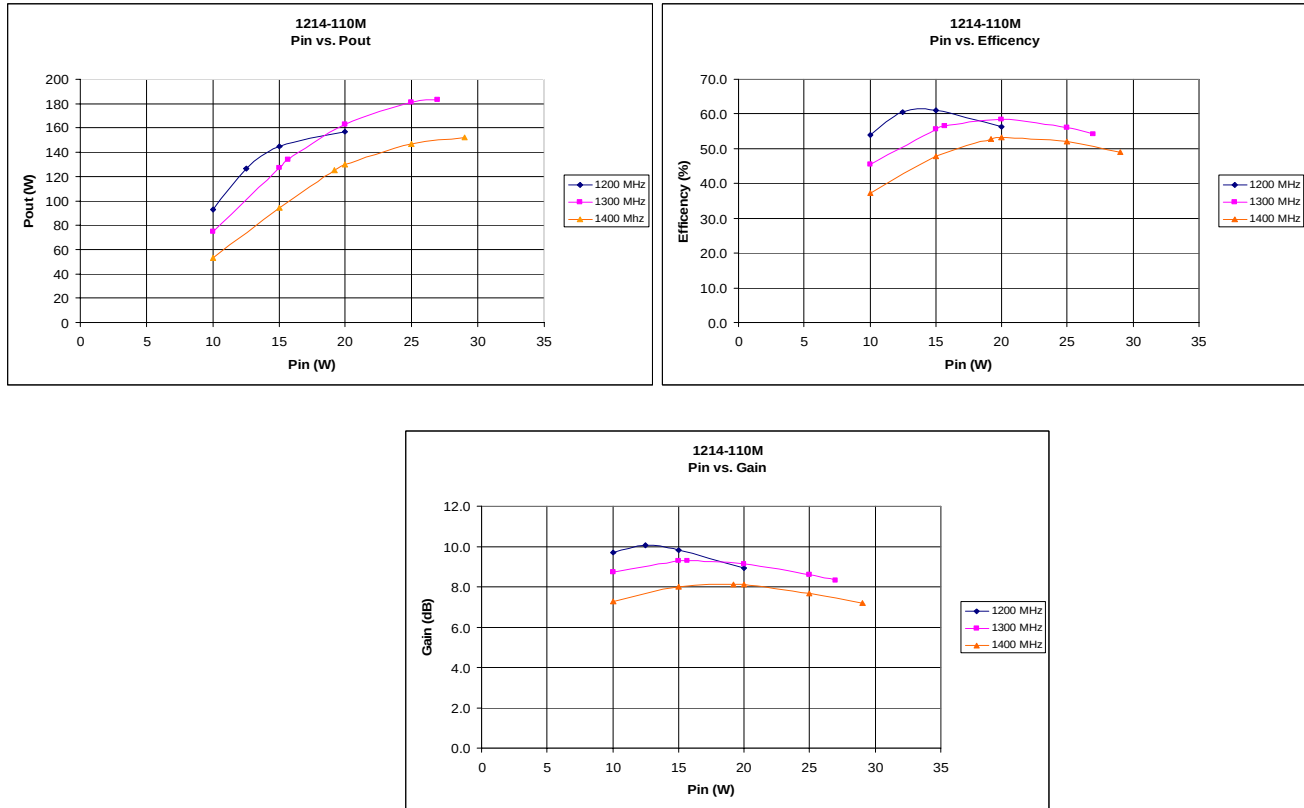


Impedance Information

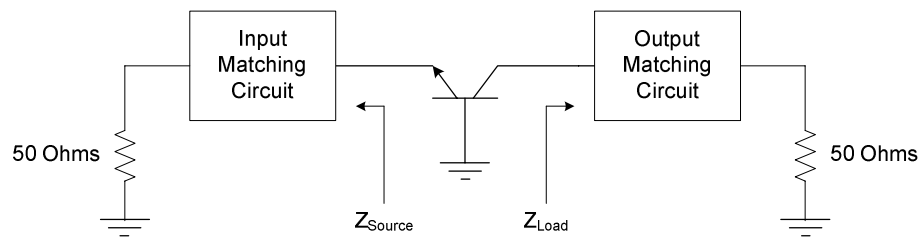

Frequencies (MHz)	$Z_{Source} (\Omega)$	$Z_{Load} (\Omega)^2$
1200	3.36-j3.12	4.97+j0.15
1300	3.5-j2.4	5.33-j2.86
1400	3.81-j1.3	2.88-j3.86

Note 2: Z_{Load} exclusive of bias circuit

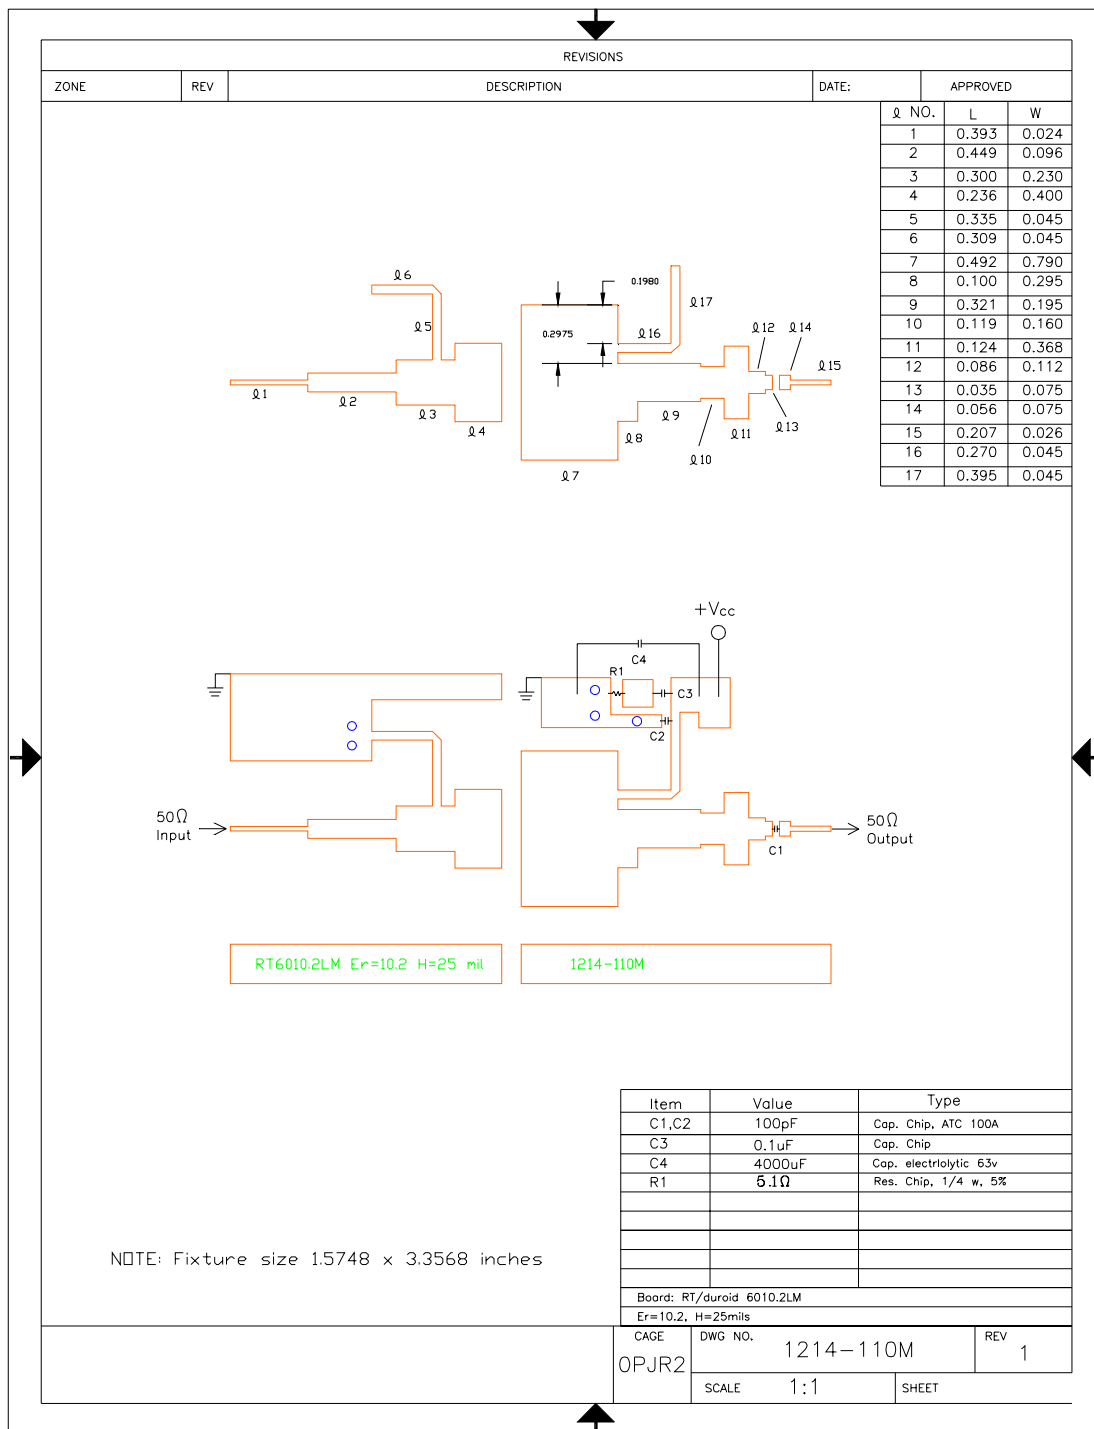

MICROSEMI CORP. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. TO VERIFY THE CURRENT VERSION PLEASE CHECK OUR WEB SITE AT WWW.MICROSEMI.COM OR CONTACT OUR FACTORY DIRECT.
Microsemi Corp. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 / 869-2324



1214-110M

