

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0850520696

Status:

Active

Overview:

din_41612

Description:

2.54mm (.100") Pitch DIN 41612 Receptacle, Style R Reverse, 32 Circuits

Documents:

3D Model

RoHS Certificate of Compliance (PDF)

Drawing (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Backplane Connectors

Series

85052

Application

Backplane

Component Type

PCB Receptacle

Overview

din_41612

Product Name

IEC 603-2/DIN 41612

Style

R

Physical

Circuits (Loaded)

32

Circuits (maximum)

96

Durability (mating cycles max)

500

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

No

Keying to Mating Part

Yes

Number of Columns

16

Number of Pairs

Open Pin Field

Number of Rows

3

Orientation

Right Angle

PC Tail Length (in)

0.110 In

PC Tail Length (mm)

2.80 mm

PCB Locator

No

PCB Retention

Yes

PCB Thickness Recommended (in)

0.063 In, 0.126 In

PCB Thickness Recommended (mm)

1.60 mm, 3.20 mm

Packaging Type

Tray

Pitch - Mating Interface (in)

0.100 In

Pitch - Mating Interface (mm)

2.54 mm

Pitch - Term. Interface (in)

0.100 In

Pitch - Term. Interface (mm)

2.54 mm

Polarized to PCB

Yes

Stackable

No

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-55°C to +125°C

Termination Interface: Style

Through Hole

Electrical

Current - Maximum per Contact

2.5A

Data Rate


622.0 Mbps

Real Signals (per 25mm)

30

Voltage - Maximum

250V AC (RMS)

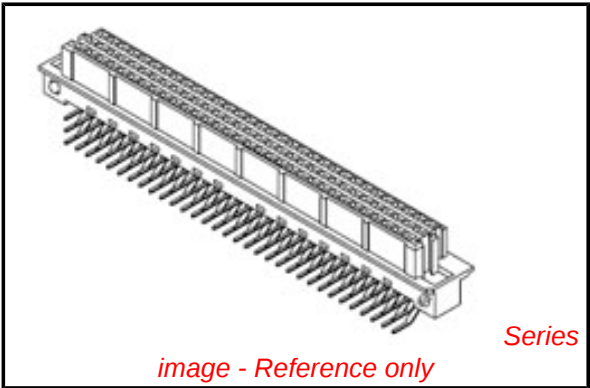

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

85052Series

Mates With

DIN 41612 Headers [85003](#) , [85013](#)

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-85052-0696, SDA-85052-0001
---------------	-------------------------------

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

