


Bandpass Filter 252852B



1. Features

- IF bandpass filter
- Low-Loss Filter
- Single-ended operation
- Ceramic Surface Mount Device(SMD) Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

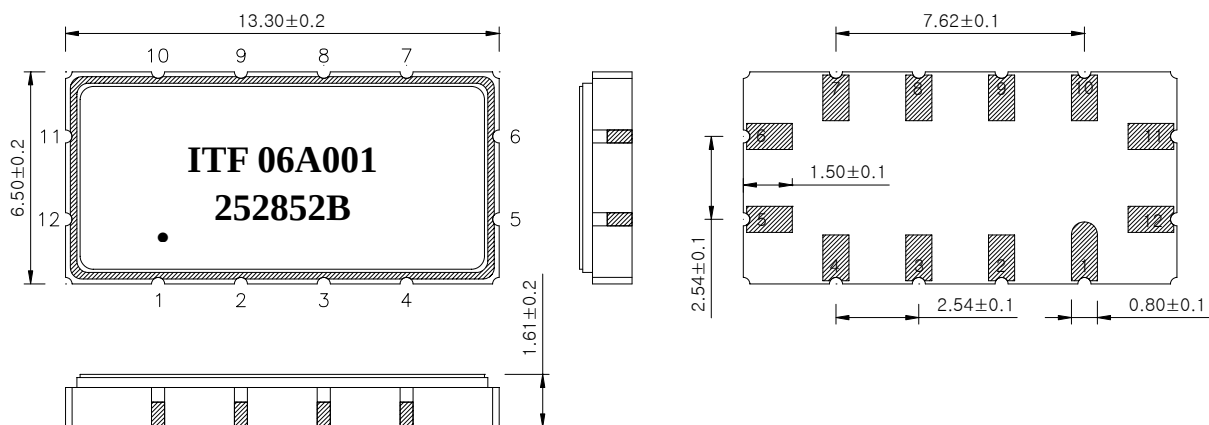

Package : S1365

Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

Pin Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252852B	
		Rev. Date	2006-07-11	
		Rev.	NJ6020-CS01	1/5

Bandpass Filter 252852B



3. Specifications

Fo = 110.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -10℃ ~ +70℃		Minimum	Typical	Maximum
Center Frequency (Fc)	MHz	-	110.0	-
Insertion Loss	dB	-	12.0	15.0
1dB Bandwidth	MHz	27.0	27.7	-
3dB Bandwidth	MHz	-	28.5	-
40dB Bandwidth	MHz	-	32.6	33.0
Amplitude Ripple (Fo +/- 12.49 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 12.49 MHz)	nsec	-	40	80
Absolute Delay	usec	-	0.82	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency (TCF)	ppm/°C	-	- 86	-

Room temperature : + 25℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	110.0	-
Insertion Loss	dB	-	12.0	14.5
Amplitude Ripple (Fo +/- 12.95 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 12.95 MHz)	nsec	-	40	80

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252852B	
		Rev. Date	2006-07-11	
		Rev.	NJ6020-CS01	2/5

Bandpass Filter 252852B




Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss

4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

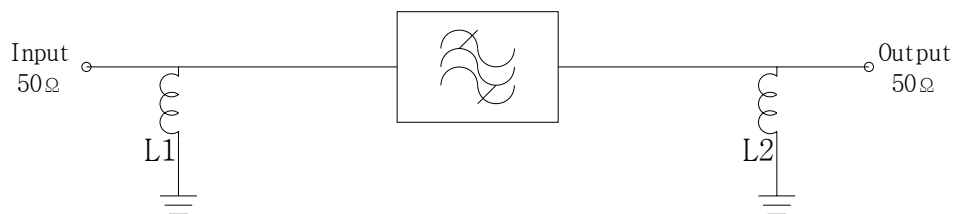

$$L1 = 39 \text{ nH}, \quad L2 = 47 \text{ nH}$$

5. Marking Configuration

ITF¹⁾ 06A001²⁾

252852B³⁾

● ⁴⁾

1) Manufacturer name

2) Lot Number

3) Part Number



4) Pad Number 1 Index

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252852B	
		Rev. Date	2006-07-11	
		Rev.	NJ6020-CS01	3/5

Bandpass Filter 252852B







6. Typical Performance (at +25℃)

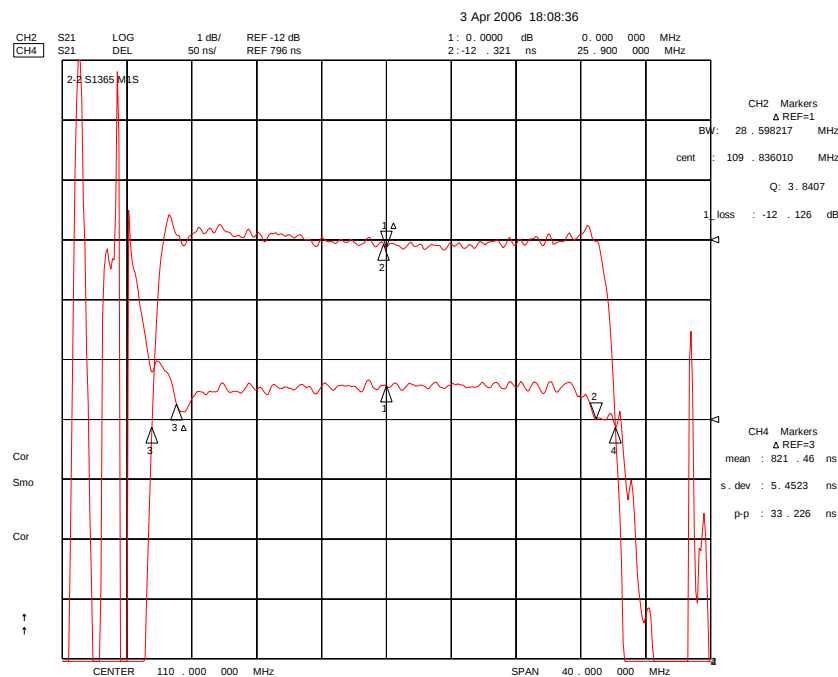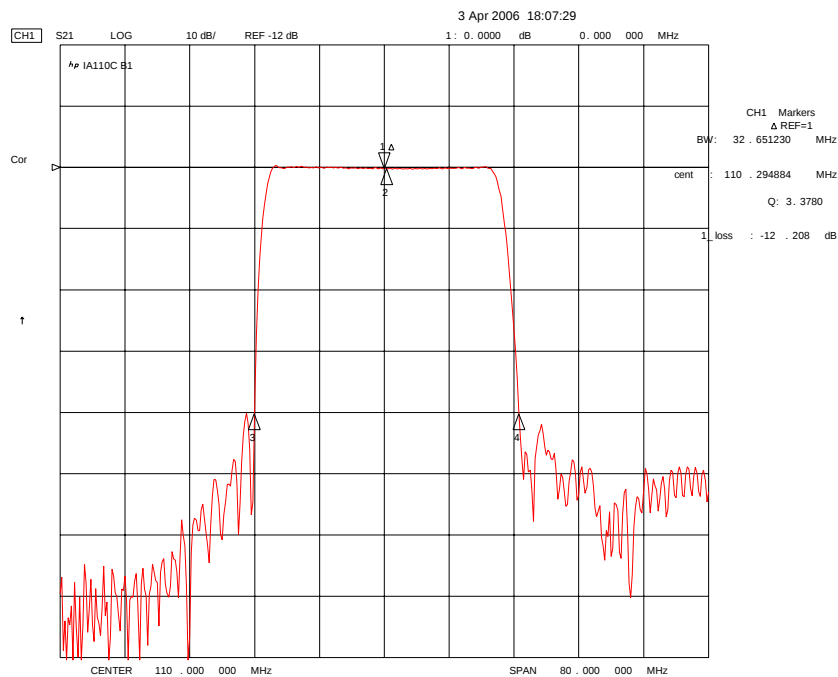

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252852B	
		Rev. Date	2006-07-11	
		Rev.	NJ6020-CS01	4/5

Bandpass Filter 252852B

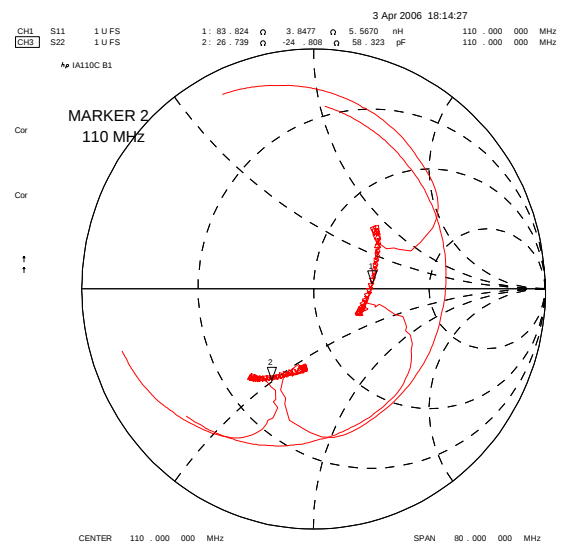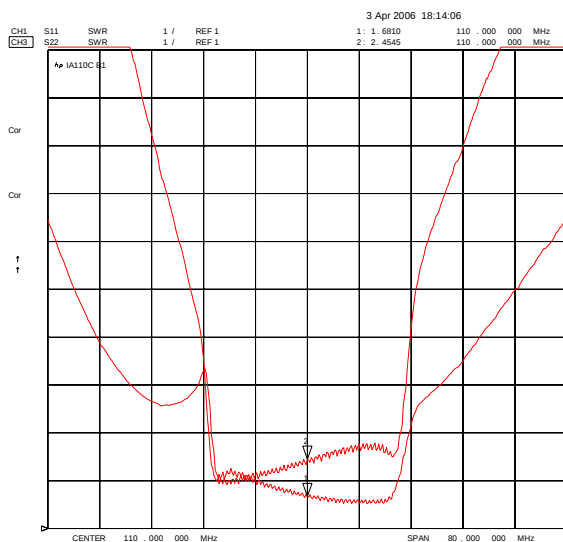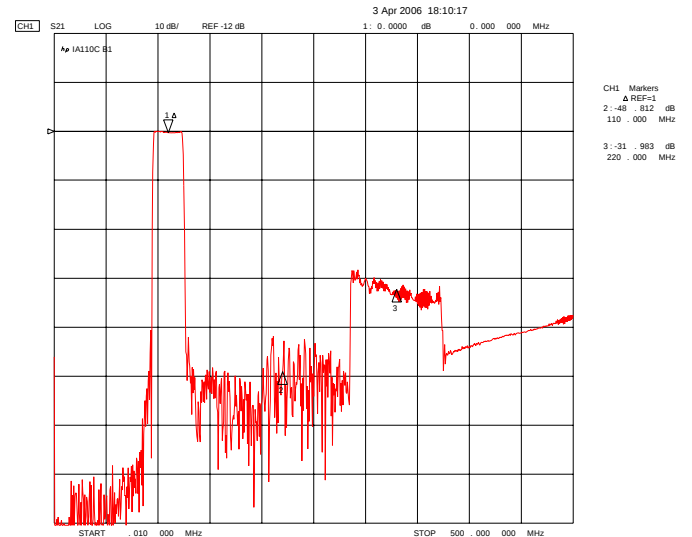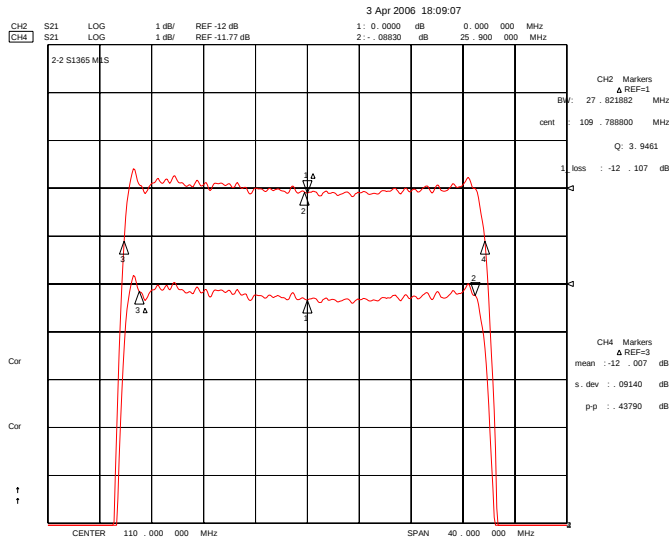

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No. 252852B	
			Rev. Date 2006-07-11	
			Rev. NJ6020-CS01	5/5