


SAW Bandpass Filter 251502B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

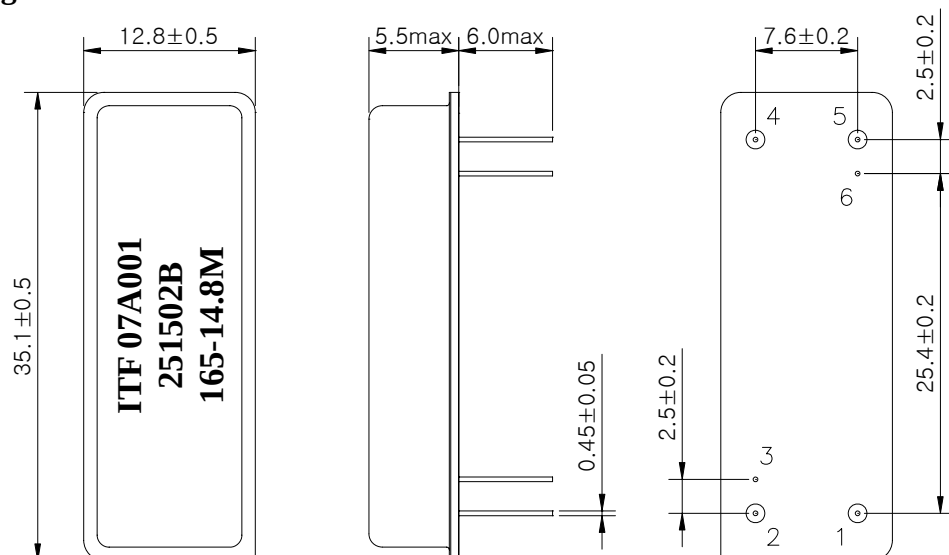

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration

1	Input
5	Output
2, 4	Ground
3, 6	Case ground



ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

251502B

Rev. Date

2007-09-17

Rev.

NM7036-CS01

1/5

SAW Bandpass Filter 251502B



3. Specifications

Fo = 165.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Room Temperature : +25℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	165.0	-
Insertion Loss	dB	-	26.5	29.0
1dB Bandwidth	MHz	14.5	14.87	-
3dB Bandwidth	MHz	15.1	15.19	-
40dB Bandwidth	MHz	-	16.55	17.0
Amplitude Ripple (fo±7.2 MHz)	dB	-	0.55	1.0
Group Delay Variation (fo±7.2 MHz)	nsec	-	50	150
Absolute Delay	usec	-	2.99	-
Ultimate Rejection	dB	50	52	-
Temperature Coefficient of Frequency	ppm/℃	-	-18	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	251502B	
		Rev. Date	2007-09-17	
		Rev.	NM7036-CS01	2/5

SAW Bandpass Filter 251502B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

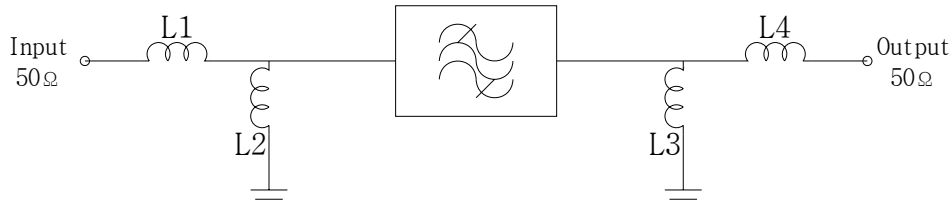

L1 = 27nH, L2 = 56nH, L3 = 18nH, L4 = 18nH

5. Marking Configuration

ITF¹⁾ 07A001²⁾

251502B³⁾

165⁴⁾-14.8M⁵⁾

1) Manufacturer name

2) Lot Number

3) Part Number

4) Center Frequency



5) 1dB-Bandwidth

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	251502B	
		Rev. Date	2007-09-17	
		Rev.	NM7036-CS01	3/5

SAW Bandpass Filter 251502B



6. Typical Performance (at +25℃)

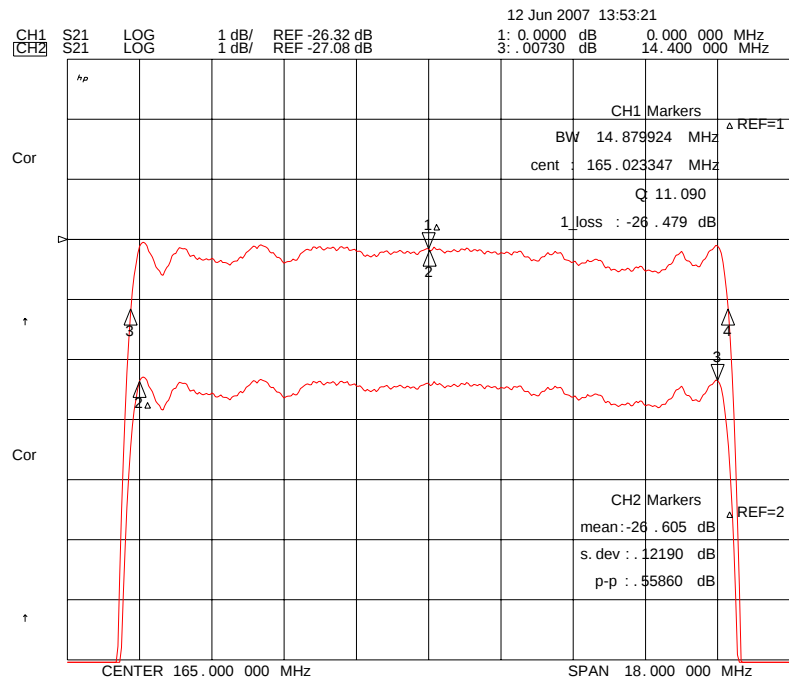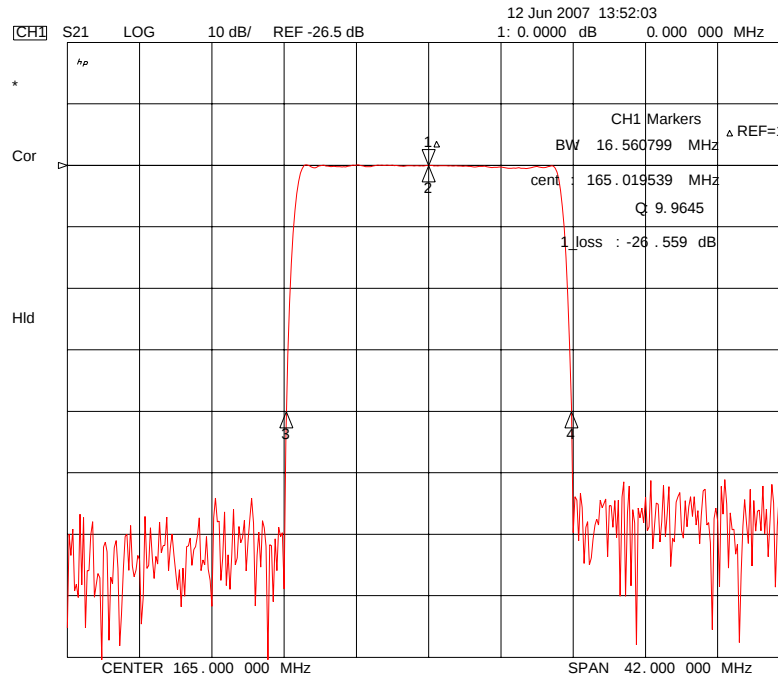

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

251502B

Rev. Date





2007-09-17

Rev.

NM7036-CS01

4/5

SAW Bandpass Filter 251502B

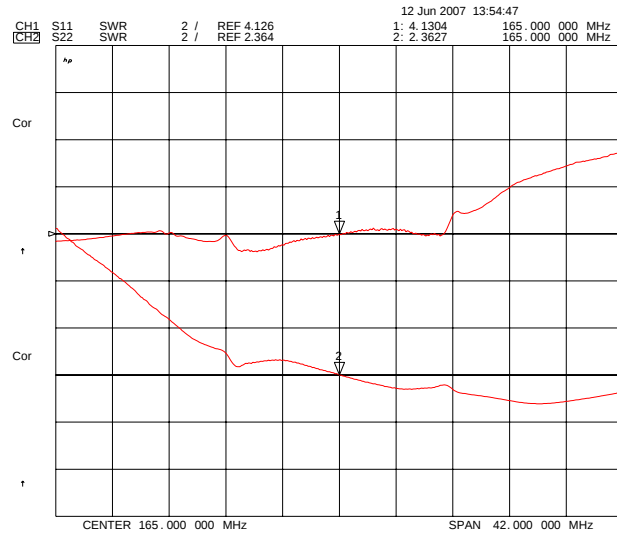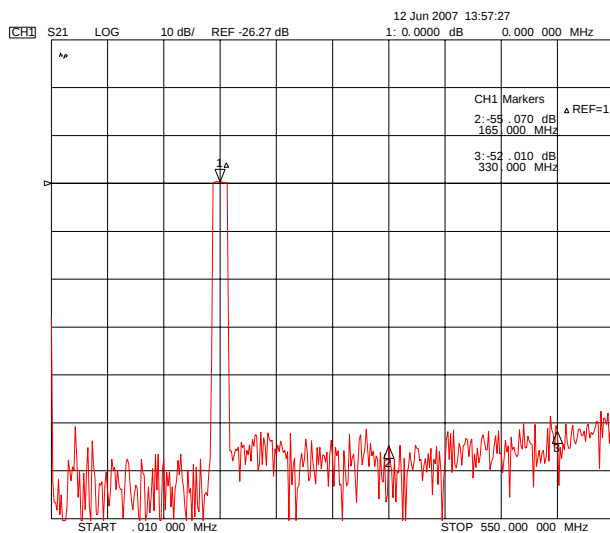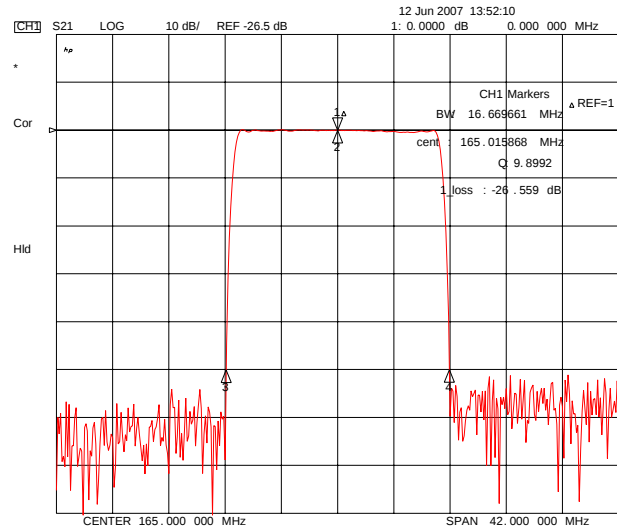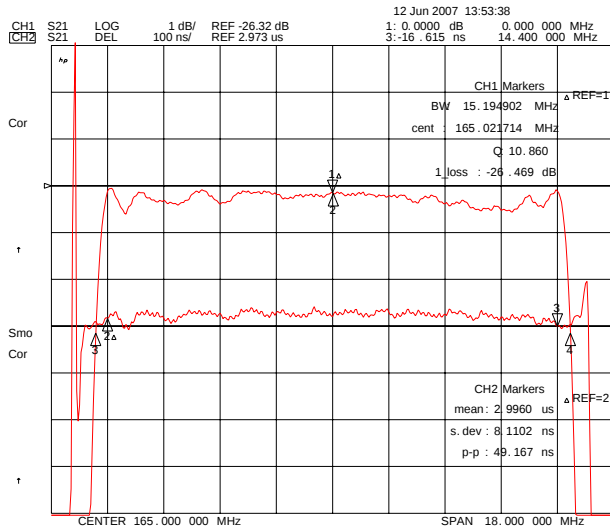

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

251502B

Rev. Date

2007-09-17

Rev.

NM7036-CS01

5/5