

KR Electronics 2521-2 Bandpass

General Description


KR 2521-2 is a 5.8 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 1.16 MHz and is designed for 50 Ω source and load impedance. Other center frequencies and bandwidths are available. Please consult the factory.

Features


- 5.8 MHz Bandpass
- 50 Ω
- SMA Connectors

Typical Performance

Passband Amplitude
(1 dB/div)

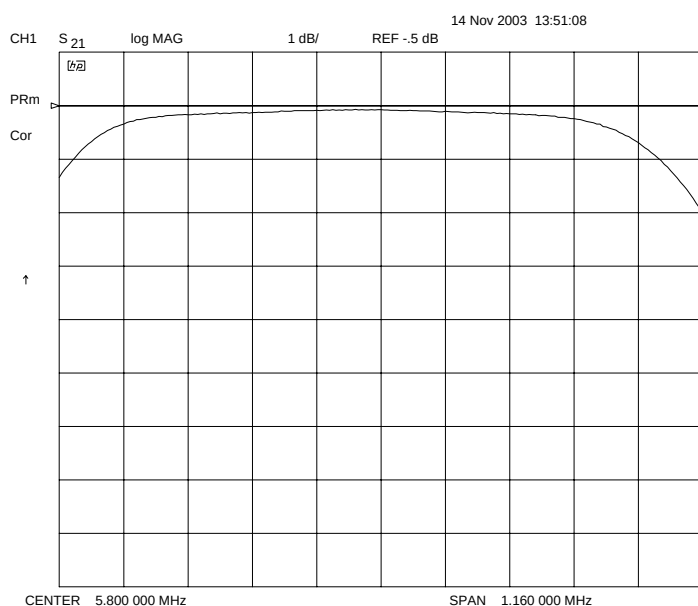

Overall Response
(5 dB/div)

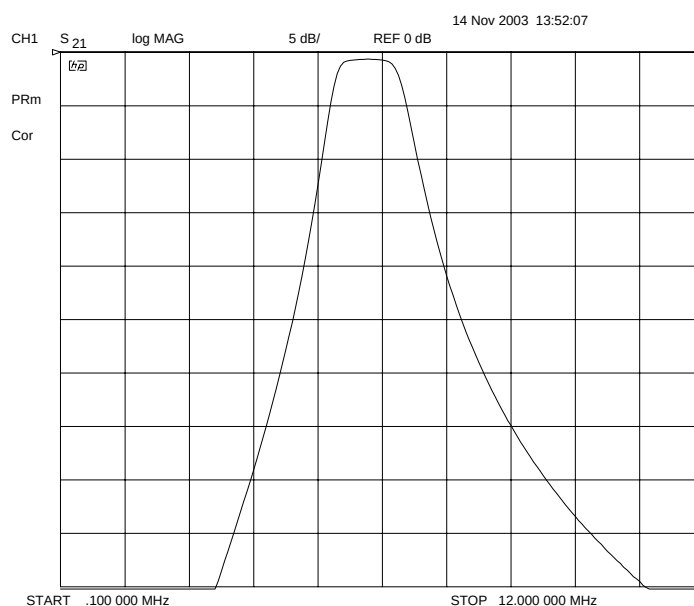

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2521-2

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	5.8 MHz
Insertion Loss	< 3 dB (< 1 dB Typ)
3 dB Bandwidth	1.16 MHz min
Source & Load	50 Ω

Physical Dimensions

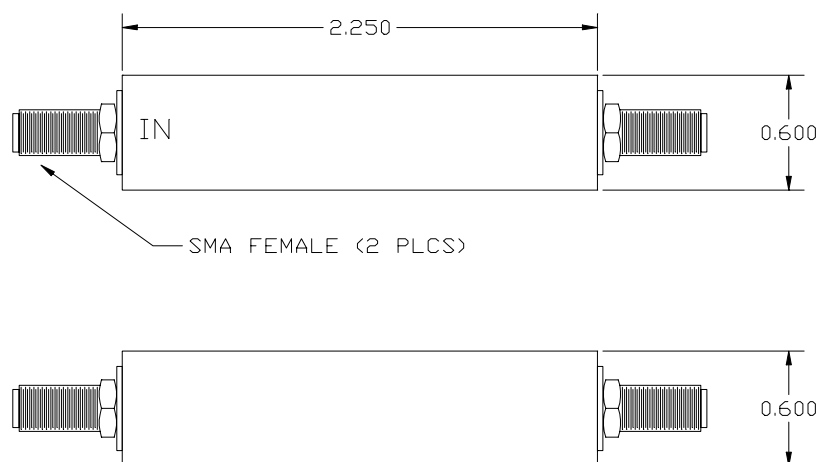

TOLERANCE UNLESS SPECIFIED ± 0.010 "