

ZMC RD...M Series

ZENER DIODES


Features

- Vz: Applied E24 standard


Applications

- Circuits for Constant Voltage, Constant Current
Wave form clipper, Surge absorber, etc.

LS-31




Dimensions in mm

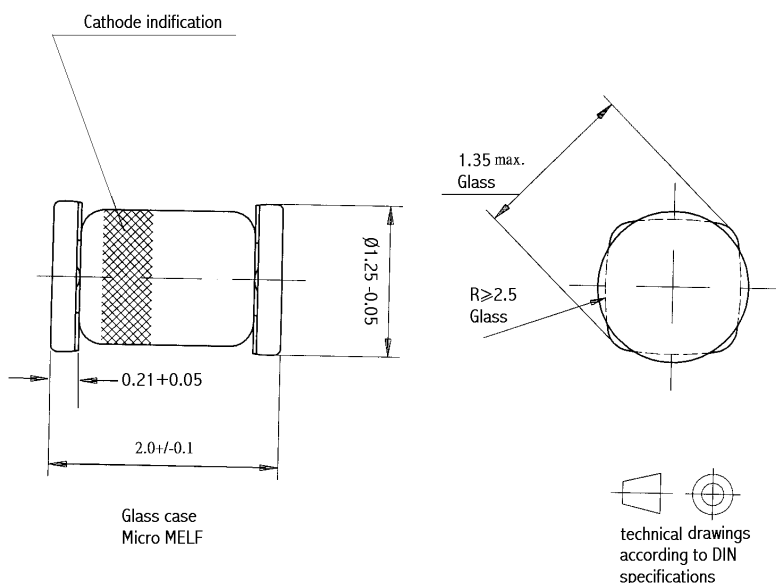

Absolute Maximum Ratings ($T_a = 25\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	200	mW
Forward Current	I_F	150	mA
Reverse Surge Power (at $t = 10\text{ }\mu\text{s}$)	P_{RSM}	100	W
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature Range	T_s	- 55 to + 150	$^{\circ}\text{C}$



®

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 7116




ISO 9001:2000
Certificate No. 0506098

Dated : 17/05/2006

ZMC RD...M Series

Characteristics at T_a = 25 °C

Type	Zener Voltage			Dynamic Impedance		Reverse Current	
	V _Z (V) ¹⁾			Z _Z (Ω) ²⁾		I _R (μA)	
	Min.	Max.	I _Z (mA)	Max.	I _Z (mA)	Max.	V _R (V)
ZMCRD2V0MB	1.8	2.15	5	100	5	120	0.5
ZMCRD2V2MB	2.1	2.4	5	100	5	120	0.7
ZMCRD2V4MB	2.3	2.6	5	100	5	120	1
ZMCRD2V7MB	2.5	2.9	5	110	5	120	1
ZMCRD2V7MB1	2.5	2.75					
ZMCRD2V7MB2	2.65	2.9					
ZMCRD3V0MB	2.8	3.2	5	120	5	50	1
ZMCRD3V0MB1	2.8	3.05					
ZMCRD3V0MB2	2.95	3.2					
ZMCRD3V3MB	3.1	3.5	5	130	5	20	1
ZMCRD3V3MB1	3.1	3.35					
ZMCRD3V3MB2	3.25	3.5					
ZMCRD3V6MB	3.4	3.8	5	130	5	10	1
ZMCRD3V6MB1	3.4	3.65					
ZMCRD3V6MB2	3.55	3.8					
ZMCRD3V9MB	3.7	4.1	5	130	5	10	1
ZMCRD3V9MB1	3.7	3.97					
ZMCRD3V9MB2	3.87	4.1					
ZMCRD4V3MB	4.01	4.48	5	130	5	10	1
ZMCRD4V3MB1	4.01	4.21					
ZMCRD4V3MB2	4.15	4.34					
ZMCRD4V3MB3	4.28	4.48					
ZMCRD4V7MB	4.42	4.9	5	130	5	10	1
ZMCRD4V7MB1	4.42	4.61					
ZMCRD4V7MB2	4.55	4.75					
ZMCRD4V7MB3	4.69	4.9					
ZMCRD5V1MB	4.84	5.37	5	130	5	5	1.5
ZMCRD5V1MB1	4.84	5.04					
ZMCRD5V1MB2	4.98	5.2					
ZMCRD5V1MB3	5.14	5.37					
ZMCRD5V6MB	5.31	5.92	5	80	5	5	2.5
ZMCRD5V6MB1	5.31	5.55					
ZMCRD5V6MB2	5.49	5.73					
ZMCRD5V6MB3	5.67	5.92					
ZMCRD6V2MB	5.86	6.53	5	50	5	2	3
ZMCRD6V2MB1	5.86	6.12					
ZMCRD6V2MB2	6.06	6.33					
ZMCRD6V2MB3	6.26	6.53					
ZMCRD6V8MB	6.47	7.14	5	30	5	2	3.5
ZMCRD6V8MB1	6.47	6.73					
ZMCRD6V8MB2	6.65	6.93					
ZMCRD6V8MB3	6.86	7.14					
ZMCRD7V5MB	7.06	7.84	5	30	5	2	4
ZMCRD7V5MB1	7.06	7.36					
ZMCRD7V5MB2	7.28	7.6					
ZMCRD7V5MB3	7.52	7.84					
ZMCRD8V2MB	7.76	8.64	5	30	5	2	5
ZMCRD8V2MB1	7.76	8.1					
ZMCRD8V2MB2	8.02	8.36					
ZMCRD8V2MB3	8.28	8.64					



SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 7116



ISO 9001:2000
Certificate No. 0506098

Dated : 17/05/2006


ZMC RD...M Series

Characteristics at $T_a = 25^\circ\text{C}$

Type	Zener Voltage			Dynamic Impedance		Reverse Current	
	$V_Z (\text{V})$ ¹⁾			$Z_Z (\Omega)$ ²⁾		$I_R (\mu\text{A})$	
	Min.	Max.	$I_Z (\text{mA})$	Max.	$I_Z (\text{mA})$	Max.	$V_R (\text{V})$
ZMCRD9V1MB	8.56	9.55	5	30	5	2	6
ZMCRD9V1MB1	8.56	8.93					
ZMCRD9V1MB2	8.85	9.23					
ZMCRD9V1MB3	9.15	9.55					
ZMCRD10MB	9.45	10.55	5	30	5	2	7
ZMCRD10MB1	9.45	9.87					
ZMCRD10MB2	9.77	10.21					
ZMCRD10MB3	10.11	10.55					
ZMCRD11MB	10.44	11.56	5	30	5	2	8
ZMCRD11MB1	10.44	10.88					
ZMCRD11MB2	10.76	11.22					
ZMCRD11MB3	11.1	11.56					
ZMCRD12MB	11.42	12.6	5	35	5	2	9
ZMCRD12MB1	11.42	11.9					
ZMCRD12MB2	11.74	12.24					
ZMCRD12MB3	12.08	12.6					
ZMCRD13MB	12.47	13.96	5	35	5	2	10
ZMCRD13MB1	12.47	13.03					
ZMCRD13MB2	12.91	13.49					
ZMCRD13MB3	13.37	13.96					
ZMCRD15MB	13.84	15.52	5	40	5	2	11
ZMCRD15MB1	13.84	14.46					
ZMCRD15MB2	14.34	14.98					
ZMCRD15MB3	14.85	15.52					
ZMCRD16MB	15.37	17.09	5	40	5	2	12
ZMCRD16MB1	15.37	16.01					
ZMCRD16MB2	15.85	16.51					
ZMCRD16MB3	16.35	17.09					
ZMCRD18MB	16.94	19.03	5	45	5	2	13
ZMCRD18MB1	16.94	17.7					
ZMCRD18MB2	17.56	18.35					
ZMCRD18MB3	18.21	19.03					
ZMCRD20MB	18.86	21.08	5	50	5	2	15
ZMCRD20MB1	18.86	19.7					
ZMCRD20MB2	19.52	20.39					
ZMCRD20MB3	20.21	21.08					
ZMCRD22MB	20.88	23.17	5	55	5	2	17
ZMCRD22MB1	20.88	21.77					
ZMCRD22MB2	21.54	22.47					
ZMCRD22MB3	22.23	23.17					
ZMCRD24MB	22.93	25.57	5	60	5	2	19
ZMCRD24MB1	22.93	23.96					
ZMCRD24MB2	23.72	24.78					
ZMCRD24MB3	24.54	25.57					
ZMCRD27MB	25.1	28.9	2	70	2	2	21
ZMCRD30MB	28	32	2	80	2	2	23
ZMCRD33MB	31	35	2	80	2	2	25
ZMCRD36MB	34	38	2	90	2	2	27
ZMCRD39MB	37	41	2	100	2	2	30
ZMCRD43MB	40	45	2	130	2	2	33
ZMCRD47MB	44	49	2	150	2	2	36

¹⁾ V_Z is tested with pulse (20 ms).

²⁾ Z_Z is measured at I_Z by given a very small A.C. Current Signal.



®

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002 Certificate No. 05103
ISO 14001:2004 Certificate No. 7116
ISO 9001:2000 Certificate No. 0506098

Dated : 17/05/2006