




1. Mechanical Dimensions:

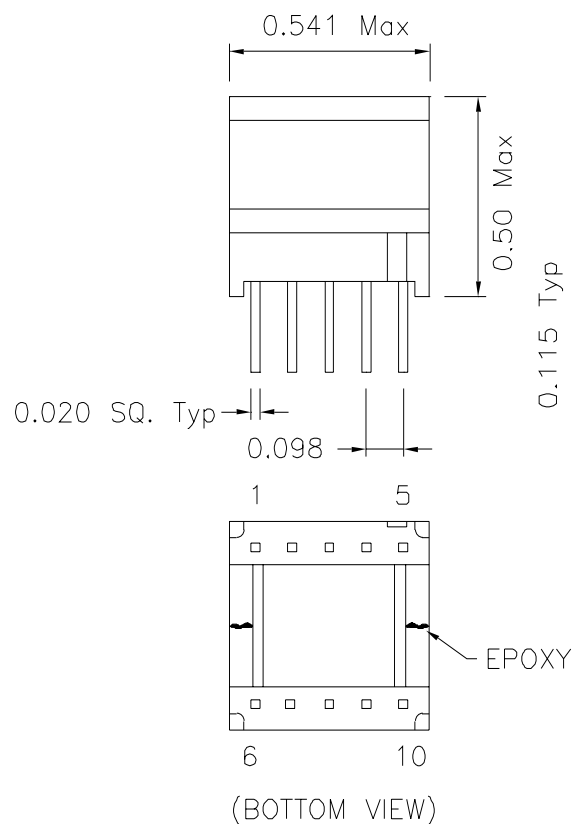

TOP VIEW

2. Schematic:

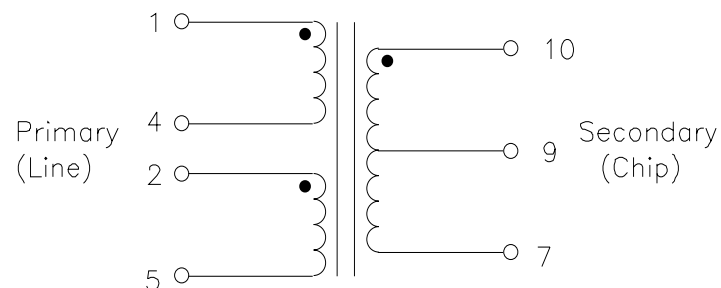

3. Electrical Specifications:

OCL: (Pins 1-5) 2.0mH $\pm 6\%$ 10KHz, .1V 0/100mAdc

Leakage L: (Pins 1-5) 35.0uH Max 100KHz, 0.1V
Short Pins 10-7, tie 4-2

Cw/w: (Pins 1-10) 60pF Max 100KHz, .1V (Tie 2&4)

Turns Ratio: (1-5):(10-7) 2.3CS:1CT $\pm 2\%$ Tie 2-4

DC Res: (Pins 10-7) 1.37 Ohms $\pm 15\%$

DC Res.: (Pins 1-4) 0.500 Ohms $\pm 15\%$

DC Res.: (Pins 2-5) 0.500 Ohms $\pm 15\%$

HYPOT: 3000VAC Chip-Line


HYPOT: 2000VAC Wdgs-Core

Operating Temp.: -40 to +85°C


DOC. REV: A/3

XFMRS Inc		Title: HDSL2 TRANSFORMER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ± 0.010 Dimensions in INCH	P/N: XF1313-7HD		REV. A
	DWN.	BW	Sep-29-99
	CHK.	AEI	Sep-29-99
	APP.	Joe Huff	Oct-25-99


1. Mechanical Dimensions:

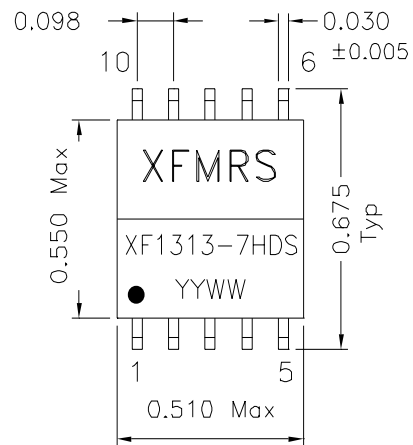


CO-PLANARITY: 0.004 Max

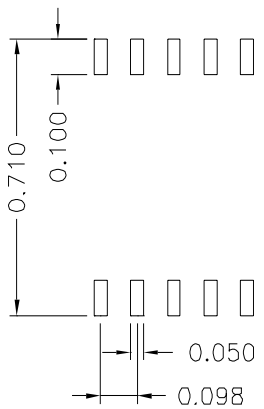

Suggested PCB Layout

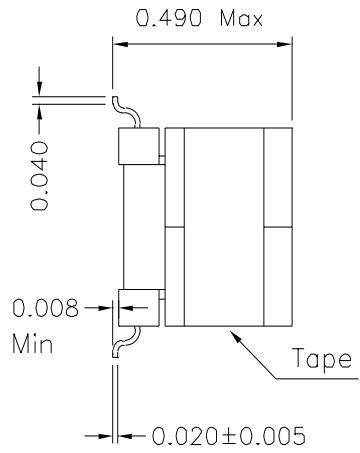

2. Schematic:

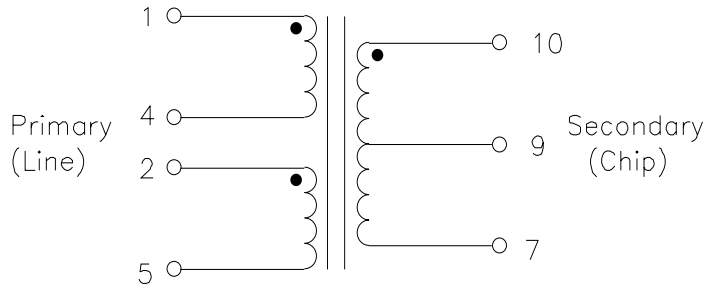

3. Electrical Specifications:

- OCL: (Pins 1-5) 2.0mH ±6% 10KHz, .1V 0/100mAdc
- Leakage L: (Pins 1-5) 35.0uH Max 100KHz, 0.1V
Short Pins 10-7, tie 4-2
- Cw/w: (Pins1-10) 60pF Max 100KHz, .1V (Tie2&4)
- Turns Ratio: (1-5):(10-7) 2.3CS:1CT ±2% Tie 2-4
- DC Res: (Pins 10-7) 1.37 Ohms ±15%
- DC Res.: (Pins 1-4) 0.500 Ohms ±15%
- DC Res.: (Pins 2-5) 0.500 Ohms ±15%
- HYPOT: 3000VAC Chip-Line
- HYPOT: 2000VAC Wdgs-Core
- Operating Temp.: -40 to +85°C

DOC. REV: A/3

XFMRS Inc		Title: HDSL2 TRANSFORMER		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF1313-7HDS		REV. A	
	DWN.	BW	Sep-29-99	
	CHK.	AEI	Sep-29-99	
	APP.	Joe Huff	Oct-25-99	