



Features

- 500VAC rated capacitor designed for use in high voltage system.





Safety Agency : Standard		File No.
UL	: UL-1283	E78644
TÜV	: IEC60384-14 II EN132400	J9650619


Applications

- Suppressing noise occurring in large power systems, such as 3 phase 500VAC inverters, and welding machines.

Dimensions

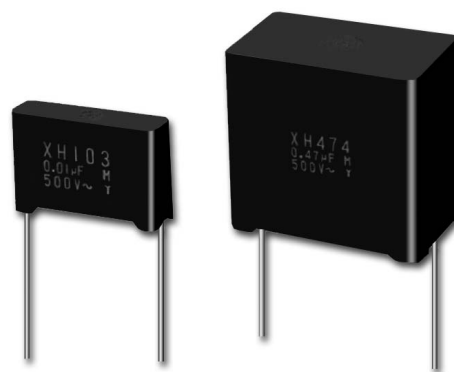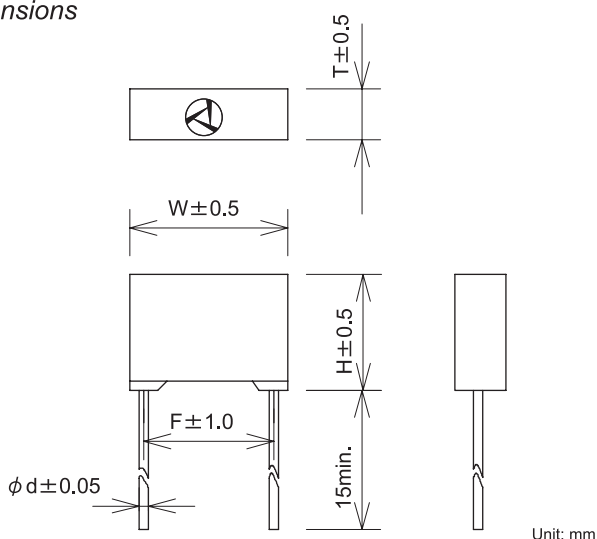

Circuit



Electrical Specifications

Rated Voltage **500VAC**

Safety Agency	Class	Model Number	Capacitance μF ±20%	Dimensions					Dissipation Factor	Test Voltage		Insulation Resistance	
				W	H	T	F	d					
		XH102	0.001	17.0	12.5	5.5	15.0	0.8	0.01max. (at 1kHz)	L to L 2200VAC 50/60Hz 60sec	Line to Ground 2200VAC 50/60Hz 60sec	Line to Line 15000MΩ min. (at 500VDC)	Line to Ground 100000MΩ min. (at 500VDC)
		XH152	0.0015										
		XH222	0.0022										
		XH332	0.0033										
		XH472	0.0047										
		XH682	0.0068										
 	X 2	XH103	0.01	25.0	16.0	6.5	22.5			1.0			
		XH153	0.015										
		XH223	0.022										
		XH333	0.033										
		XH473	0.047										
		XH683	0.068										
		XH104	0.1	30.0	24.5	13.5	27.5						
		XH154	0.15										
		XH224	0.22										
		XH334	0.33	31.0	28.0	16.0							
				36.0	33.5	22.0		32.5					
		XH474	0.47	36.0	33.5	22.0		32.5					

Operating Temperature: -40~+85°C