



1. Dimensions:

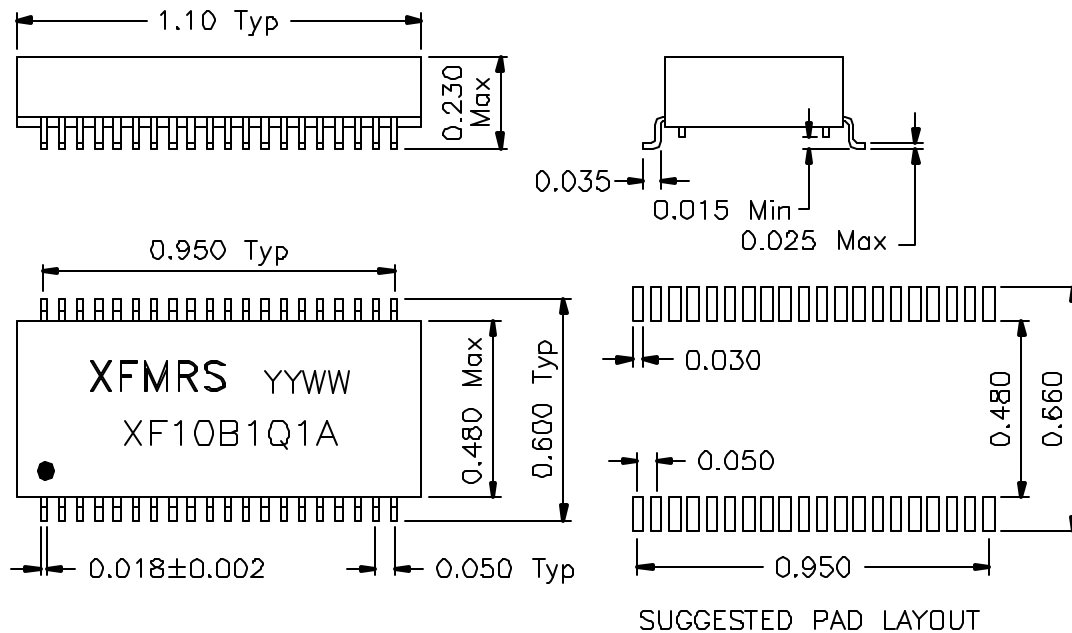

3. Electrical Specifications: @25°C

Turns Ratio: PRI/SEC TX 1CT:1.4CT RX 1:1
 Isolation Voltage: 1500 Vrms (Input to Output)
 PRI OCL: 150uH Minimum @10KHz,100mV
 PRI Leakage Inductance. 0.3uH Maximum @1MHz 100mV SEC Shorted
 PRI/SEC Cw/w: 10pF Max@1MHz 100mV
 Pri DCR: 0.350 Ohms Max (TX & Rx)
 SEC DCR: 0.35 Ohms Max (RX Only)
 SEC DCR: 1.2 Ohms Max (Tx Only)

2. Schematic:

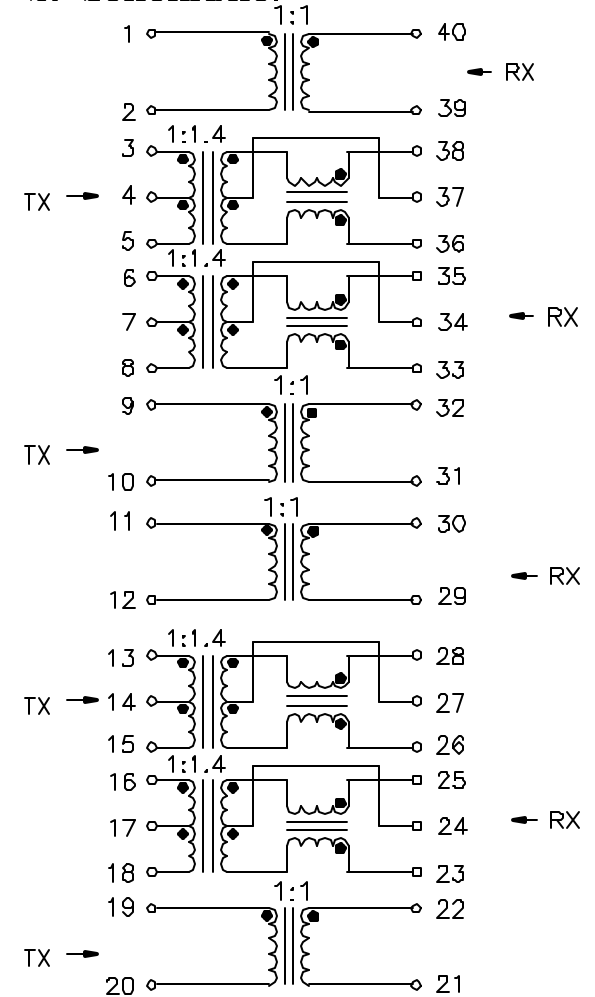

DOC REV.: A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

XFMRS Inc		Title: Quad Port 10BASE-T Module	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH		P/N: XF1506Q1	REV. A
		DWN. 李清儿	Apr-07-99
		CHK. 孙小松	Apr-07-99
SCALE 2:1 SHT 1 OF 1		APP. Joe Huff	Apr-08-99