


## 2. Schematic:

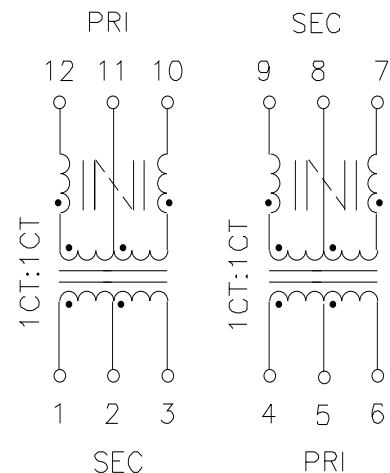

Isolation Voltage: 1500 Vrms (PRI/SEC)

Turns Ratio: 1CT:1CT $\pm$ 2% (Pri: Sec)

PRI OCL: 1.2mH Min. @100KHz 50mV

Cw/w: PRI/SEC 35.0pF Max. @100KHz 50mV

PRI LL: 0.60uH MAX. @100KHz 50mV Sec Shorted

PRI DC Resistance: 1.60 Ohms Max

## SUGGESTED FOOTPRINT

DOC. REV A/1

|                                                                                |                 |                    |           |
|--------------------------------------------------------------------------------|-----------------|--------------------|-----------|
| XFMRS Inc                                                                      |                 | Title: TRANSFORMER |           |
| UNLESS OTHERWISE SPECIFIED<br>TOLERANCES:<br>.xxx ±0.010<br>Dimensions in Inch | P/N: XF0013W6AP | REV. A             |           |
|                                                                                | DWN.            | 廖玉坤                | Jun-13-00 |
|                                                                                | CHK.            | 李清儿                | Jun-13-00 |
| SCALE 2.5:1 SHT 1 OF 1                                                         | APP.            | Joe Huff           | Jun-13-00 |