



**POWER MATE
TECHNOLOGY CO.,LTD.**



APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

TEA1P5 SERIES

FEATURES

- 1.5 WATTS MAXIMUM OUTPUT POWER
- OUTPUT CURRENT UP TO 400mA
- PACKAGE, 1.10 x 0.63 x 0.31 INCH
- HIGH EFFICIENCY UP TO 76%
- 2:1 WIDE INPUT VOLTAGE RANGE
- FIVE-SIDED SHIELD
- SWITCHING FREQUENCY 100K TO 1500KHz.
- NO EXTERNAL INPUT AND OUTPUT CAPACITOR NEEDED
- LOW RIPPLE & NOISE
- OVER CURRENT PROTECTION
- SHORT CIRCUIT PROTECTION
- LONG LIFE WITHOUT ELECTROLYTIC CAPACITOR
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- DESIGN MEETS J60950-1, UL60950-1, EN60950-1 AND IEC60950-1
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC


DESCRIPTION

The TEA1P5 series offer 1.5 watts of output power from a 1.10 x 0.63 x 0.31 inch package without derating to 85°C and without external input/output capacitor. The TEA1P5 series with 2:1 wide input voltage of 4.5-9, 9-18, 18-36 and 36-75VDC and features 500VAC of isolation, short-circuit protection.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Maximum output power		1.5 Watts	
Voltage accuracy	Full load and nominal Vin	± 1%	
Minimum load		0%	
Line regulation	LL to HL at Full Load	± 0.2%	
Load regulation	No load to Full Load	± 0.5%	
Ripple and noise	50MHz bandwidth	See table	
Maximum temperature drift		±0.02% / °C, max.	
Transient response recovery time	25% load step change	500µs, typ.	
Short circuit protection	Continuous, automatic recovery		
Over current protection		180%, typ.	
OUTPUT VOLTAGE ADJUSTMENT TERMINAL(Vset) (Note 6)			
Model number	Open	-Vout shorted	+Vout shorted
XXS33	3.3V	3.67V	2.84V
XXS05	5V	6V	4.3V
XXS12	12V	15V	-
XXD12	±12V	±15V	-
Model number	Open	-Vout connected with resistance (7)	+Vout connected with resistance (7)
XXS33	3.3V	3.3 to 3.67V (8-1)	3.3 to 2.84V (8-2)
XXS05	5V	5 to 6V (8-3)	5 to 4.3V (8-4)
XXS12	12V	12 to 15V (8-5)	-
XXD12	±12V	±12 to ±15V (8-6)	-
GENERAL SPECIFICATIONS			
Efficiency		See table	
Isolation voltage	Input to Output Input (Output) to Case	500 Vac	
Isolation resistance	Input to Output Input (Output) to Case	500VDC 50M ohms	
Isolation capacitance		300 pF, max.	
Safety standard pending	IEC60950-1, J60950-1, UL60950-1, EN60950-1		
Switching frequency	Full load to No load	100K to 1500K Hz	
Case material		Metal case	
Base material		None	
Weight		8.0g (0.28oz)	
Dimension		1.10 x 0.63 x 0.31 Inch (28.0 x 16.0 x 7.8 mm)	
MTBF (Note 1)	BELLCORE TR-NWT-000332 MIL-HDBK-217F	4.456 x 10 ⁶ hrs 4.871 x 10 ⁶ hrs	

INPUT SPECIFICATIONS		
Input voltage range	5V nominal input	4.5 – 9VDC
	12V nominal input	9 – 18VDC
	24V nominal input	18 – 36VDC
	48V nominal input	36 – 75VDC
Input filter		L-C filter
Input surge voltage 100ms max	5V nominal input	15VDC
	12V nominal input	36VDC
	24V nominal input	50VDC
	48V nominal input	100VDC
ENVIRONMENTAL SPECIFICATIONS		
Operating ambient temperature		-25°C to +85°C (Non-derating)
Maximum case temperature		100°C
Storage temperature range		-55°C to +105°C
Cooling		Nature convection
Thermal shock		MIL-STD-810F
Vibration	At no operation, 10~55~10Hz (sweep for 15min.) amplitude 1.5mm constant (maximum 9G X, Y, Z 2hrs each)	
Operating humidity range		20% to 95% RH
Storage humidity range		20% to 95% RH
EMC CHARACTERISTICS		
EMI(Note 9)	EN55022	Class A



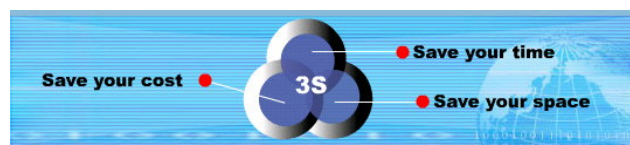




Model Number	Input Range	Output Voltage	Output Voltage Range	Output Current		Output ⁽²⁾ Ripple&Noise	Input Current		Eff ⁽⁴⁾ (%)	Capacitor ⁽⁵⁾ Load max
				Min. load	Full load		No Load ⁽³⁾	Full Load ⁽²⁾		
TEA1P5-05S33	4.5 – 9 VDC	3.3 VDC	2.84 – 3.67 VDC	0mA	400mA	75mVp-p	25mA	407mA	69	1650μF
TEA1P5-05S05	4.5 – 9 VDC	5 VDC	4.3 – 6 VDC	0mA	300mA	75mVp-p	30mA	435mA	73	750μF
TEA1P5-05S12	4.5 – 9 VDC	12 VDC	12 – 15 VDC	0mA	125mA	75mVp-p	35mA	434mA	73	350μF
TEA1P5-05D12	4.5 – 9 VDC	±12 VDC	±12 – ±15 VDC	0mA	±60mA	75mVp-p	45mA	412mA	74	±120μF
TEA1P5-12S33	9 – 18 VDC	3.3 VDC	2.84 – 3.67 VDC	0mA	400mA	75mVp-p	10mA	158mA	74	1650μF
TEA1P5-12S05	9 – 18 VDC	5 VDC	4.3 – 6 VDC	0mA	300mA	75mVp-p	10mA	177mA	75	750μF
TEA1P5-12S12	9 – 18 VDC	12 VDC	12 – 15 VDC	0mA	125mA	75mVp-p	15mA	172mA	77	350μF
TEA1P5-12D12	9 – 18 VDC	±12 VDC	±12 – ±15 VDC	0mA	±60mA	75mVp-p	30mA	172mA	74	±120μF
TEA1P5-24S33	18 – 36 VDC	3.3 VDC	2.84 – 3.67 VDC	0mA	400mA	75mVp-p	5mA	81mA	72	1650μF
TEA1P5-24S05	18 – 36 VDC	5 VDC	4.3 – 6 VDC	0mA	300mA	75mVp-p	5mA	88mA	75	750μF
TEA1P5-24S12	18 – 36 VDC	12 VDC	12 – 15 VDC	0mA	125mA	75mVp-p	10mA	88mA	75	350μF
TEA1P5-24D12	18 – 36 VDC	±12 VDC	±12 – ±15 VDC	0mA	±60mA	75mVp-p	10mA	85mA	75	±120μF
TEA1P5-48S33	36 – 75 VDC	3.3 VDC	2.84 – 3.67 VDC	0mA	400mA	75mVp-p	5mA	40mA	74	1650μF
TEA1P5-48S05	36 – 75 VDC	5 VDC	4.3 – 6 VDC	0mA	300mA	75mVp-p	5mA	44mA	76	750μF
TEA1P5-48S12	36 – 75 VDC	12 VDC	12 – 15 VDC	0mA	125mA	75mVp-p	5mA	44mA	75	350μF
TEA1P5-48D12	36 – 75 VDC	±12 VDC	±12 – ±15 VDC	0mA	±60mA	75mVp-p	5mA	43mA	75	±120μF

Note:



- BELLCORE TR-NWT-000332. Case 1:50% Stress, temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
- Maximum value at nominal input voltage and full load.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistive load.
- The following output voltage can be obtained by connecting this terminal to an output + or – terminal. Unless the output voltage is adjusted, this terminal should be open.
- In addition, the voltage can be adjusted not by shorting these terminals, but by connecting them to resistances as shown below.
- Arithmetic expression connected resistance: R (KΩ)
 8-1 $V_o = (3.3 \cdot R + 36.7) / (R + 10)$
 8-3 $V_o = 2.5 \cdot [2 + 2.7 / (R + 6.8)]$
 8-5 $V_o = 2.5 + 9.5 \cdot (R + 10.9) / (R + 8.2)$ [Between two outputs]
 8-2 $V_o = (3.3 \cdot R + 36.7) / (R + 12.92)$
 8-4 $V_o = 2.5 \cdot [2 - 2.7 / (R + 9.5)]$
 8-6 $V_o = 2.5 + 22 \cdot (R + 12.7) / (R + 10)$ [Between two outputs]
- The TEA1P5 series can meet EN55022 Class A with parallel an external capacitor to the input pins.
 Recommend : 05Vin : 10μF/25V 1210 MLCC
 12Vin : 4.7μF/25V 1210 MLCC
 24Vin : 3.3μF/50V 1210 MLCC
 48Vin : 1.5μF/100V 1812 MLCC

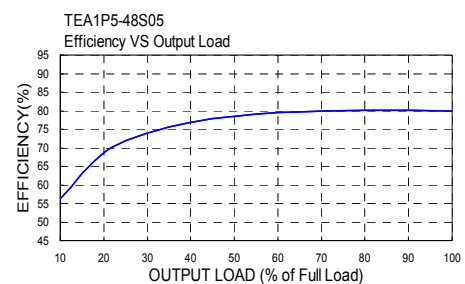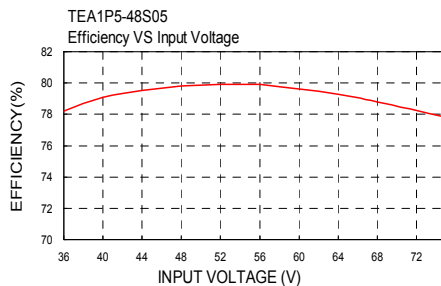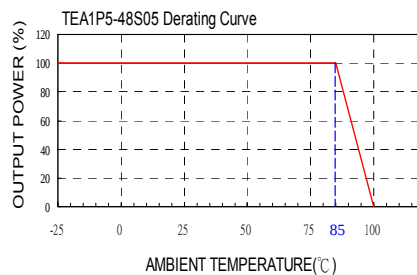

[illegible]


PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
3	NC	- OUTPUT
4	- OUTPUT	COMMON
5	Vset	Vset
6	+ OUTPUT	+ OUTPUT
7	CASE STAND OFF	CASE STAND OFF
8	CASE STAND OFF	CASE STAND OFF
9	CASE	CASE
10	CASE	CASE

Output voltage setting can be externally trimmed by using the method shown below. () for dual output trim

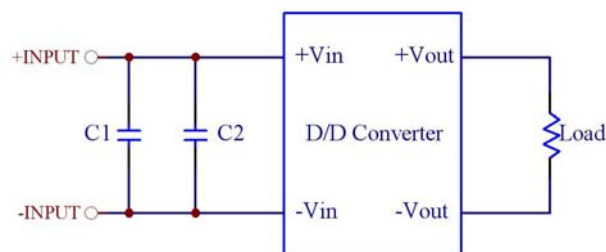

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2
TEA1P5 -05XXX	22μF/10V 1210 MLCC	N/A
TEA1P5 -12XXX	22μF/25V 1812 MLCC	N/A
TEA1P5 -24XXX	6.8μF/50V 1812 MLCC	N/A
TEA1P5 -48XXX	2.2μF/100V 1812 MLCC	2.2μF/100V 1812 MLCC

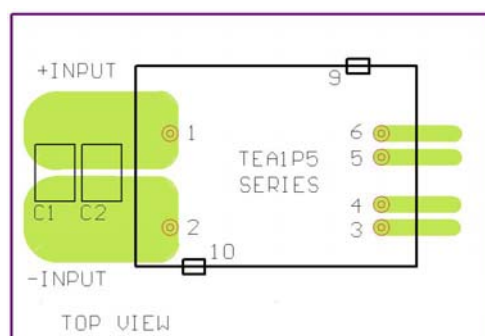

Recommended EN55022 Class B Filter Circuit Layout