



1. Mechanical:

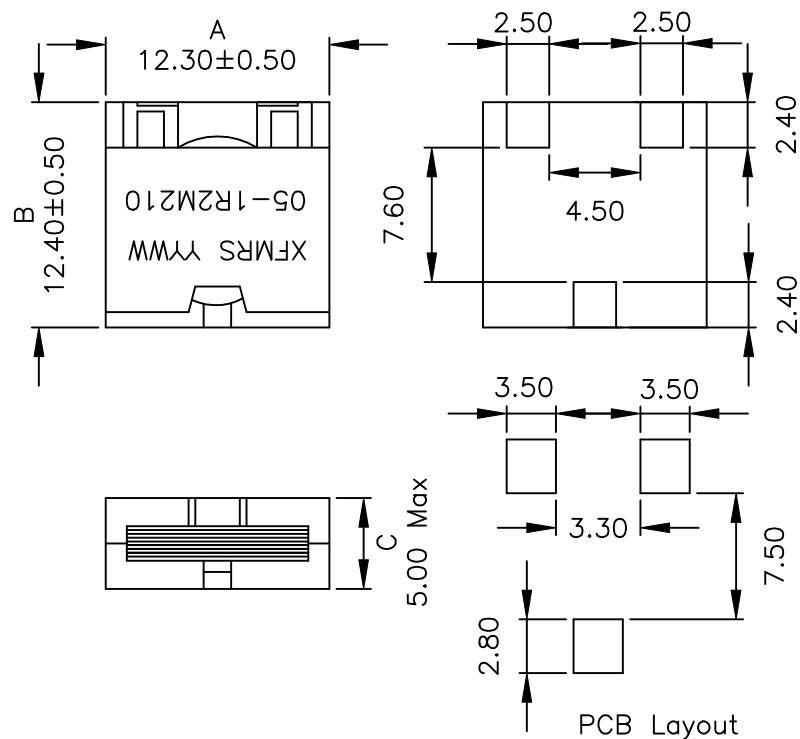

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: $> 28\%$
4. Operating Temperature Range: -40°C to $+85^{\circ}\text{C}$

2. Schematic:



3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: $1.2\mu\text{H} \pm 20\%$ @100KHz, 0.25V, 0DC
 CURRENT: 21.0 ADC Max
 DC Res.: 3.70mOhms Max

DOC. REV: A/1

XFMRS Inc		Title: SM INDUCTOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.25 Dimensions in mm	P/N: XF121205-1R2M210		REV. A	
	DWN.	李小锋	Jan-2-03	
	CHK.	廖玉坤	Jan-2-03	
	APP.	BW	Jan-2-03	