


VWX1065 Pressure Window

Description:

Broadband teflon fiberglass window for use in double ridge waveguide.

Features:

- Waveguide: WRD-475
- Frequency Range: 5.25 - 10.5 GHz
- VSWR: 1.10:1 max
- Insertion loss: 0.1 dB max.
- Power: 300 Watts CW
- Pressure: 35 PSIG max.
- Material/Finish: Aluminum Iridite

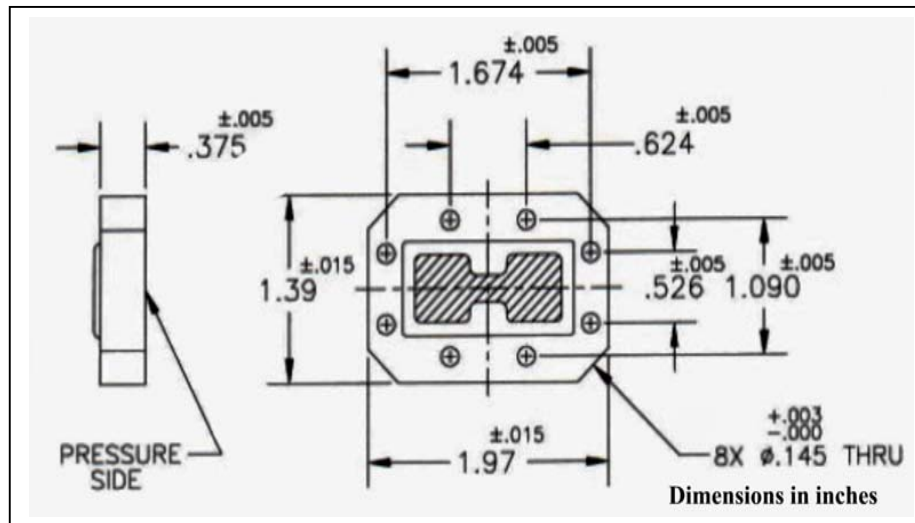

150 Sohier Road
Beverly, Massachusetts 01915



Phone: 978-922-6000 Fax: 978-922-2736
E-Mail: marketing@bmd.cpii.com
Internet: www.cpii.com/bmd

Beverly Microwave Division