


**P/N: VP2017A DATA SHEET**

Page : 1/2

Feature


- IEEE 802.3af/ANSI X3.263 compliant performance.
- Suitable for End-span POE applications
- Designed for IP phone or switch applications.
- Suitable for Auto MDIX applications.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)	OCL (uH Min) @ 100KHz/0.1V with 8mA DC Bias	Cross talk (dB Min)			HI-POT (Vrms)
			30MHz	60MHz	100MHz	
VP2017A	1CT:1CT	350	-45	-40	-35	1800

Continue

Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)				DCMR (dB Min)		
	1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	30 MHz	60MHz	100MHz
VP2017A	-1.2	-16	-14	-13	-12	-43	-37	-33

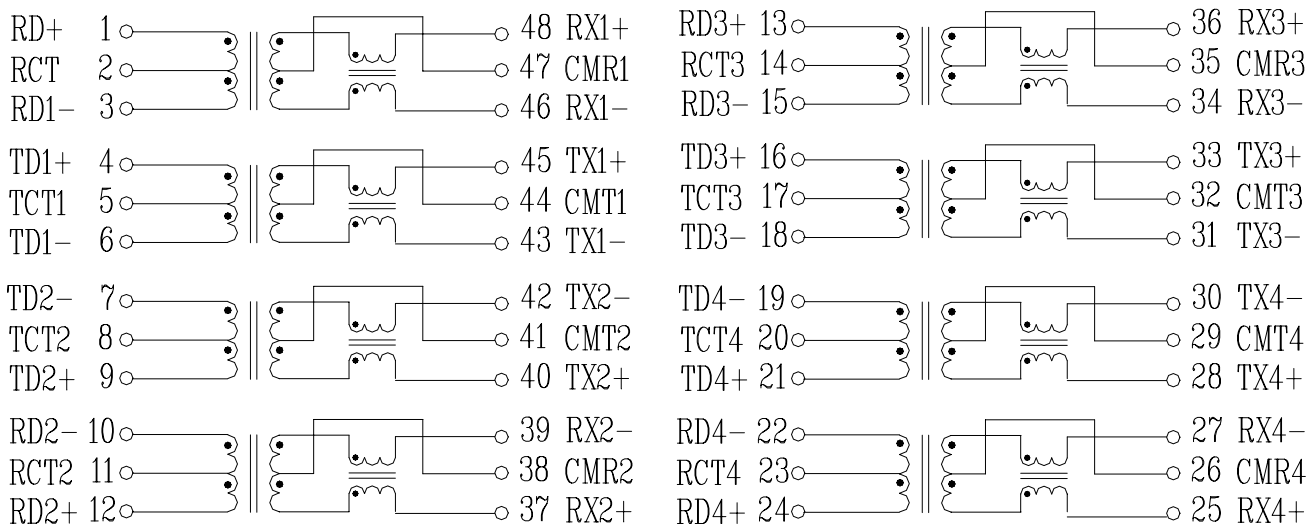Schematic

P/N: VP2017A DATA SHEET
Mechanical

Page : 2/2

