




## Bulk Metal® Foil Technology Tubular Axial-Lead Resistors, Meets or Exceed MIL-R-39005 Requirements



### Any value and tolerance available within resistance range

This series of axial leaded resistors is made using the same foil technology as the S102C. The difference is axial versus radial leads. Axial leads have the advantage of readily available auto insertion equipment while the radial leaded devices may require additional tooling. Also, when converting from metal film (RNC 55) to foil (VMTA 55) boards may already be laid out for the axial leaded device. It is worth noting that for new designs the S102C footprint is the smallest in the industry (taking into account the need for lead exit to board pad length allowance).

Our Application Engineering Department is available to advise and to make recommendations. For non-standard technical requirements and special applications, please contact us.

**TABLE 1 - TCR** (for values under 50R)

VALUES	0 °C to + 60 °C	- 55 to + 125 °C, + 25 °C Ref.
25R - 50R	± 5 ppm/°C	± 8 ppm/°C
15R - 24R999	± 6 ppm/°C	± 10 ppm/°C
5R - 14R999	± 8 ppm/°C	± 12 ppm/°C
1R - 4R999	± 15 ppm/°C	± 20 ppm/°C


### FEATURES

- Temperature Coefficient of Resistance (TCR):  
± 8 ppm/°C (- 55 °C to + 125 °C, + 25 °C Ref.)  
± 4 ppm/°C (0 °C to + 60 °C)
- Tolerance: to ± 0.01 %
- Load Life Stability:  
± 0.05 % at 25 °C, 2000 hours at Rated Power  
± 0.0025 % at 25 °C, 2000 hours at Low Power
- Electrostatic Discharge (ESD) above 25 000 Volts
- Resistance Range: 5 Ω to 500 kΩ
- Power Rating: 0.2 W to 1.0 W at 70 °C
- Non-Inductive, Non-Capacitive Design
- Thermal EMF: 0.1 μV/°C maximum, 0.05 μV/°C typical
- Voltage Coefficient: < 0.1 ppm/V
- Terminal Finishes available: Lead (Pb)-free  
Tin/Lead
- For better performances, please contact Application Engineering
- Any value available within resistance range (e.g. 1K2345)
- Prototype samples available from 48 hours. For more information, please contact [foil@vishay.com](mailto:foil@vishay.com)



**RoHS\***  
COMPLIANT

**FIGURE 1 - POWER DERATING CURVE**

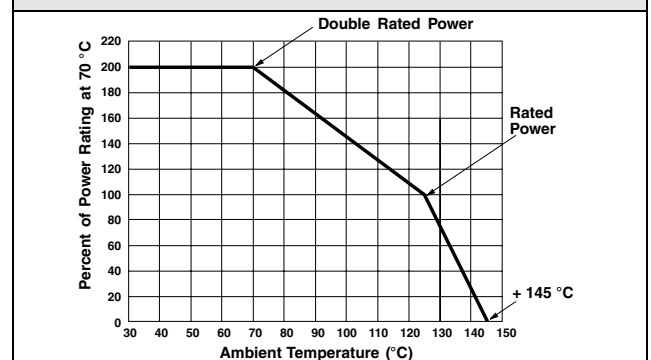

**TABLE 2 - MODEL SELECTION**

VISHAY MODEL	MIL STYLE	POWER		MAXIMUM WORKING VOLTAGE	RESISTANCE RANGE <sup>1)</sup> (Ω)	TIGHTEST TOLERANCE	TCR RANGE <sup>2)</sup>
		at + 70 °C	at + 125 °C				
VTA56	RBR56	0.25 W	0.125 W	300 V	5 to 24R9 25 to 150K	± 0.1 % ± 0.01 %	V4 V3, V2
VTA55	RBR55	0.3 W	0.15 W	300 V	5 to 24R9 25 to 150K	± 0.1 % ± 0.01 %	V4 V3, V2
VTA54	RBR54	0.5 W	0.25 W	300 V	5 to 24R9 25 to 300K	± 0.1 % ± 0.01 %	V4 V3, V2
VTA53	RBR53	0.66 W	0.33 W	300 V	5 to 24R9 25 to 300K	± 0.1 % ± 0.01 %	V4 V3, V2
VTA52	RBR52	1.0 W	0.5 W	300 V	5 to 24R9 25 to 500K	± 0.1 % ± 0.01 %	V4 V3, V2
VMTA55	RNC55	0.2 W	0.1 W	200 V	5 to 49R9 50 to 30K	± 0.1 % ± 0.01 %	V4 V3, V2
VMTB60	RNC60	0.25 W	0.125 W	250 V	5 to 49R9 50 to 60K	± 0.1 % ± 0.01 %	V4 V3, V2

### Notes

1. For higher/lower resistance values, consult the Application Engineering Department
2. TCR options for values > 50 Ω  
V4 = ± 4 ppm/°C (0 to + 60 °C); ± 8 ppm/°C (- 55 °C to + 125 °C, + 25 °C Ref.)  
V3 = ± 3 ppm/°C (0 to + 60 °C); ± 5 ppm/°C (- 55 °C to + 125 °C, + 25 °C Ref.)  
V2 = ± 2 ppm/°C (0 to + 60 °C); ± 5 ppm/°C (- 55 °C to + 125 °C, + 25 °C Ref.)

\* Pb containing terminations are not RoHS compliant, exemptions may apply


# VTA52 through 56, VMTA55, VMTB60




Vishay Foil Resistors

Bulk Metal® Foil Technology  
Tubular Axial-Lead Resistors, Meets or Exceed  
MIL-R-39005 Requirements

**FIGURE 2 - VTA/VMTA SERIES STANDARD PRINTING**

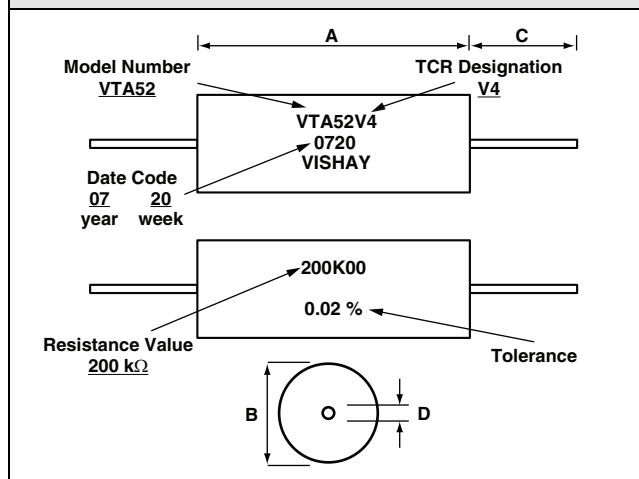


**FIGURE 3 - TRIMMING TO VALUES**  
(Conceptual Illustration)

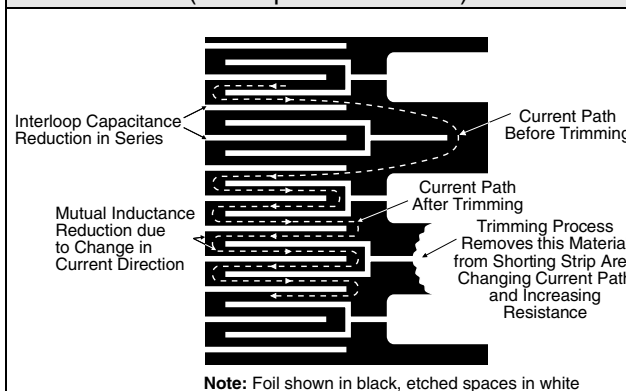

**TABLE 3 - VTA/VMTX DIMENSIONS**

VISHAY MODEL	MIL SIZE	BODY								LEAD			
		LENGTH (A)				DIAMETER (B)				LENGTH (C)		DIAMETER (D)	
		INCH		mm		INCH		mm		INCH	mm	INCH	mm
VTA56	RBR56	0.356	$\frac{+0.005}{-0.010}$	9.04	$\frac{+0.13}{-0.25}$	0.260	$\frac{+0.005}{-0.015}$	6.60	$\frac{+0.13}{-0.38}$	1.5 Minimum	38.10	0.032	0.81
VTA55	RBR55	$0.500 \pm 0.020$		$12.70 \pm 0.51$		0.260	$\frac{+0.005}{-0.010}$	6.60	$\frac{+0.13}{-0.25}$	1.5 Minimum	38.10	0.032	0.81
VTA54	RBR54	0.750	$\frac{+0.020}{-0.032}$	19.05	$\frac{+0.51}{-0.81}$	0.260	$\frac{+0.005}{-0.010}$	6.60	$\frac{+0.13}{-0.25}$	1.5 Minimum	38.10	0.032	0.81
VTA53	RBR53	$0.750 \pm 0.020$		$19.05 \pm 0.51$		0.375	$\pm 0.015$	9.53	$\pm 0.38$	1.5 Minimum	38.10	0.032	0.81
VTA52	RBR52	1.000	$\frac{+0.020}{-0.032}$	25.40	$\frac{+0.51}{-0.81}$	0.375	$\pm 0.015$	9.53	$\pm 0.38$	1.35 Minimum	34.29	0.032	0.81
VMTA55	RNC55	$0.270 \pm 0.005$		$6.86 \pm 0.13$		0.120	$\frac{+0.005}{-0.010}$	3.05	$\frac{+0.13}{-0.25}$	1.5 Minimum	38.10	0.025	0.64
VMTB60	RNC60	$0.375 \pm 0.005$		$9.53 \pm 0.13$		0.160	$\pm 0.005$	4.06	$\pm 0.13$	1.5 Minimum	38.10	0.025	0.64

**FIGURE 4 - TEMPERATURE COEFFICIENT OF RESISTANCE**

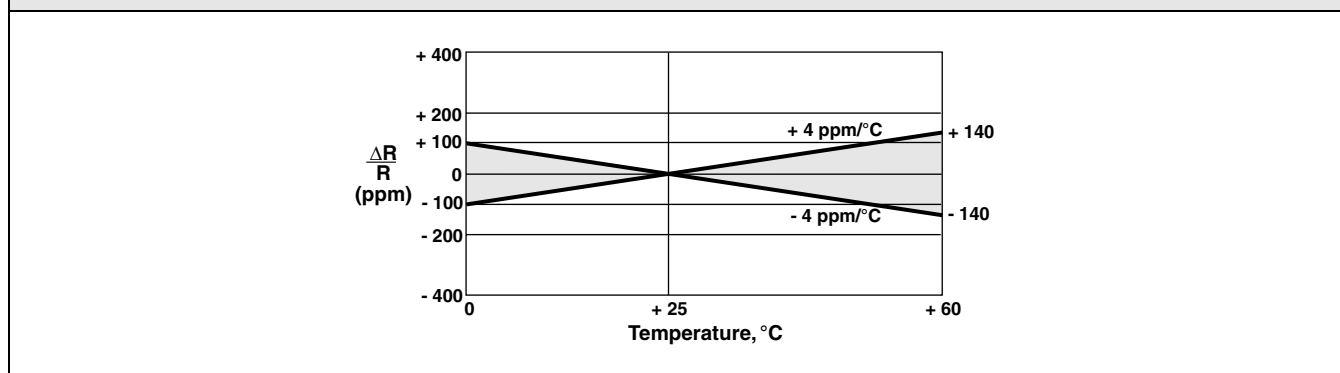




# VTA52 through 56, VMTA55, VMTB60

Bulk Metal® Foil Technology  
Tubular Axial-Lead Resistors, Meets or Exceed  
MIL-R-39005 Requirements

Vishay Foil Resistors

**TABLE 4 - GLOBAL PART NUMBER INFORMATION**

**NEW GLOBAL PART NUMBER: Y0058150K000Q19L (preferred part number format)**

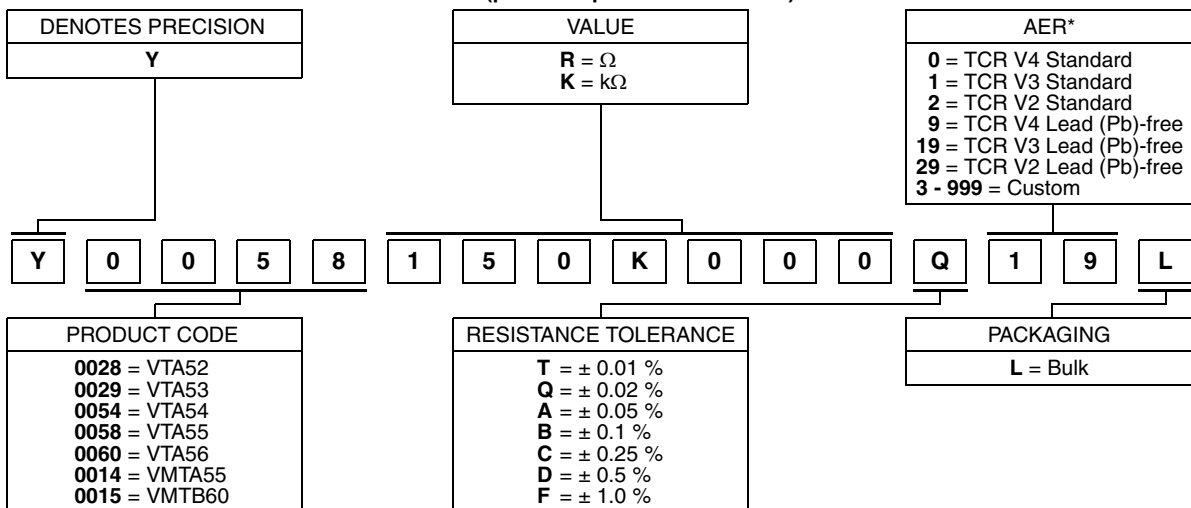

FOR EXAMPLE: ABOVE GLOBAL ORDER Y0058 150K000 Q 19 L:

TYPE: VTA55

VALUE: 150.0 k $\Omega$

ABSOLUTE TOLERANCE:  $\pm 0.02\%$

TCR: V3

TERMINATION: Lead (Pb)-free

PACKAGING: Bulk

**HISTORICAL PART NUMBER: VTA55V3T 150K00 Q B (will continue to be used)**

VTA55	V3	T	150K00	Q	B
MODEL	TCR	TERMINATION	OHMIC VALUE	RESISTANCE TOLERANCE	PACKAGING
VTA52 VTA53 VTA54 VTA55 VTA56 VMTA55 VMTB60	V4 V3 V2	T = Lead (Pb)-free None = Tin/Lead alloy	150K00 = 150.0 k $\Omega$	T = $\pm 0.01\%$ Q = $\pm 0.02\%$ A = $\pm 0.05\%$ B = $\pm 0.1\%$ C = $\pm 0.25\%$ D = $\pm 0.5\%$ F = $\pm 1.0\%$	B = Bulk

**Note**

\* For non-standard requests, please contact Application Engineering.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.