




1. Dimensions:

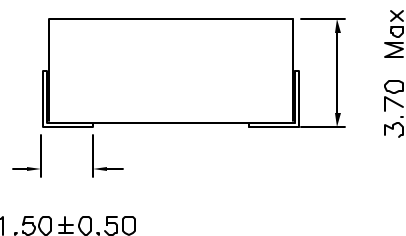

2. Schematic:



3. Electrical Specs:

Impedance: 60 Ohms Typ @10MHz

Impedance: 78 Ohms Typ @25MHz

DC Res.: 0.90 mOhms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

XFMRS Inc		Title: SURFACE MOUNT BEADS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in N/A	P/N: XFBPH-C9-853025		REV A
	DWN.	李小锋	May-21-04
	CHK.	廖玉坤	May-21-04
	APP.	J Ng	May-21-04
SHEET 1 OF 1			

DOC REV: A/1