

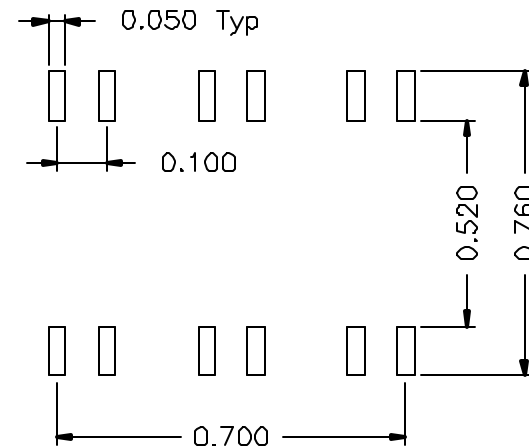


1. Dimensions:

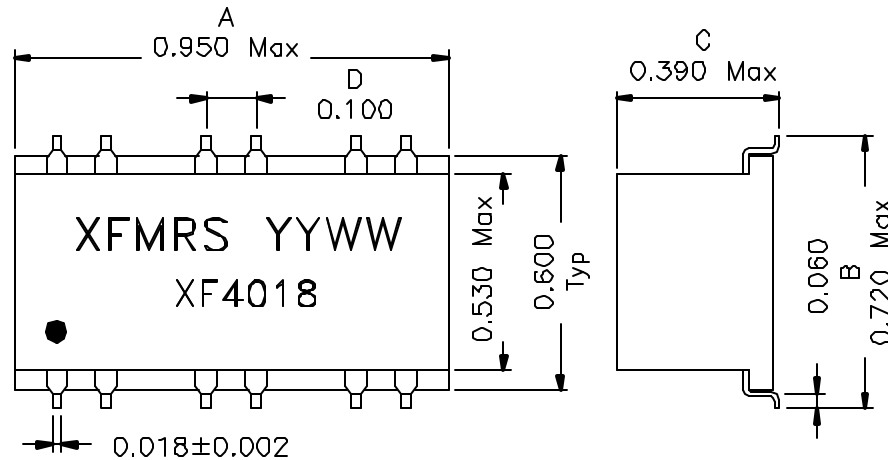

SUGGESTED PCB LAYOUT

2. Schematic:

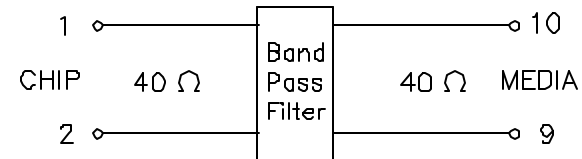

3. Electrical Specifications: @25°C

Passband: @4.5MHz–7.9MHz
 Insertion Loss: 0.8dB Max @4.5MHz–7.9MHz
 Return Loss: 10dB Min @4.5MHz–7.9MHz
 Stopband: 900KHz–3MHz
 Attenuation: 10dB Min

Note.

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C

PRELIMINARY

DOC. REV: A/1

XFMRS INC.		Title: BANDPASS FILTER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF4018		REV. A
	DWN.	廖玉坤	Jan-04-01
	CHK.	李清儿	Jan-04-01
SHT 1 OF 2	APP.	Joe Huff	Jan-04-01