


ESD Protection Diodes in SOD-923 Package

FEATURES

- High reliability
- Compact design for mounting on small surface areas
- Stand-off voltages : 3.3V , 5V
- JEDEC SOD-923 package
- Low Leakage
- Response Time < 1ns
- IEC61000-4-2 level 4 ESD protection
- Excellent ESD Rating of Calss 3 (>16kV) per Human Body Model
- Void-free , Transfer-molded Case

The NxxAD92 ESD Protection Diode Series is designed to protect voltage-sensitive components from ESD.

SCHEMATIC



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Total Power Dissipation @ TA = 25 °C	P _D	150	mWatts
Junction and Storage Temperature Range	T _j , T _{stg}	-55 to +150	°C
Lead Solder Temperature (10 sec. duration)	T _L	260	°C

Notes:

1. FR-5 = 1.0 x 0.75 x 0.62 in.

ELECTRICAL CHARACTERISTICS

DEVICE	V _{RWM} (V)	I _R (μA) @ V _{RWM}	V _{BR} (V) @ I _T (Note 2)	I _T	C (pF) (Note 3)	C (pF) (Note 3)
	Max.	Max.	Min.	mA	Typ.	Max.
N03AD92	3.3	1.0	5.0	1.0	12.8	13
N05AD92	5.0	0.5	11.0	1.0	6.0	6.2


Notes:

2. V_{BR} is measured with a pulse test current I_T at an ambient temperature of 25°C.
3. Capacitance at f = 1MHz, V_R = 0V, T_A = 25°C.

August 2007 / Rev.5

PACKAGE DIMENSIONS

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.34	0.37	0.40	0.013	0.015	0.016
b	0.15	0.20	0.25	0.006	0.008	0.010
c	0.07	0.12	0.17	0.003	0.005	0.007
D	0.75	0.80	0.85	0.030	0.031	0.033
E	0.55	0.60	0.65	0.022	0.024	0.026
H _E	0.95	1.00	1.05	0.037	0.039	0.041
L	0.05	0.10	0.15	0.002	0.004	0.006

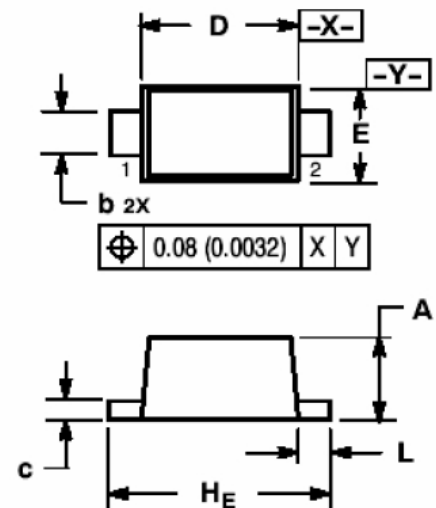

Sirectifier Global Corp., Delaware, U.S.A.

U.S.A.: sgc@sirectsemi.com France: ss@sirectsemi.com Taiwan: se@sirectsemi.com Hong Kong: hk@sirectsemi.com
 China: st@sirectsemi.com Thailand: th@sirectsemi.com Philippines: aiac@sirectsemi.com Belize: belize@sirectsemi.com