

SINGLE RJ45 CONNECTOR MODULE WITH INTEGRATED 10/100 BASE-TX MAGNETICS

P/N: LU1S041A

Page : 1/2


Feature



- Complies with requirement of IEEE802.3u standards.
- RJ 45 connector with 10/100 BASE-TX magnetic.
- Operating temperature range: 0°C to +70°C
- Storage temperature range: -25°C to +125°C

Electrical Specifications @ 25°C										
Part Number	Turns Ratio (±5%) TX/ RX	OCL (uH Min) @ 100 KHz/0.1V with 8mA DC Bias		C _{w/w} (pF Max)		L.L (uH Max)	Cross talk (dB Min)			HI-POT (Vrms)
							0.3-30MHz	30-60MHz	60-100MHz	
LU1S041A	1CT:1CT	350		28		0.4	-40	-35	-30	1500
Continue										
Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)					CMR (dB Min) TX/RX			
		0.3-100MHz	30MHz	40MHz	50MHz	60MHz	80MHz	1-30MHz	3-60MHz	60-125Mhz
LU1S041A	-1.15	-16	-14	-13.5	-13	-10	-30	-25	-20	

Schematic

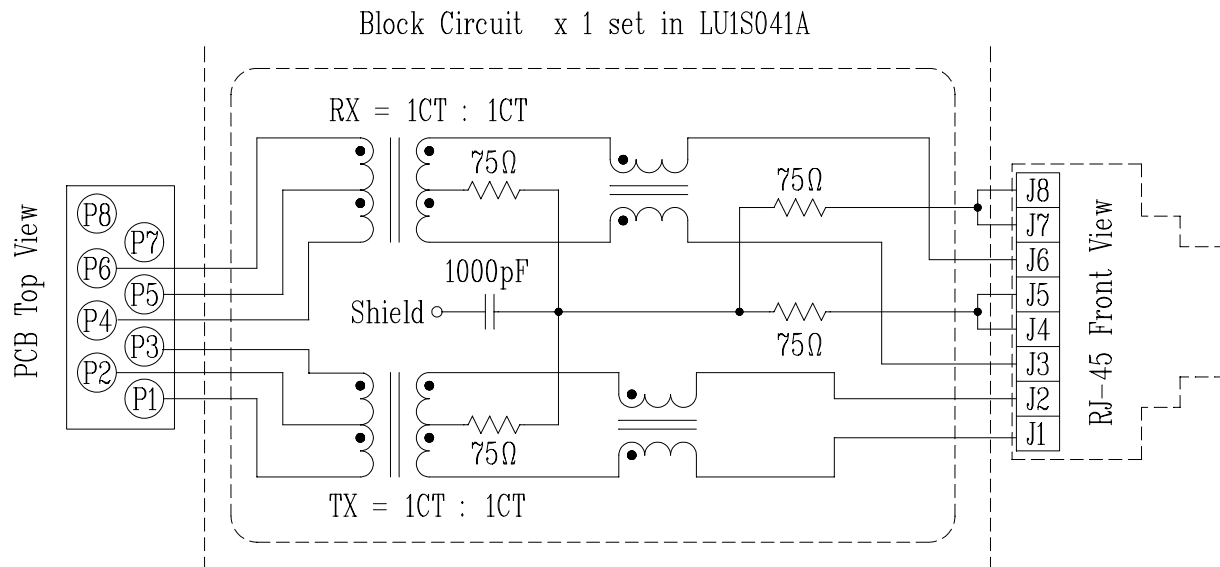


Mechanical

SINGLE RJ45 CONNECTOR MODULE WITH INTEGRATED 10/100 BASE-TX MAGNETICS

P/N: LU1S041A

Page : 2/2

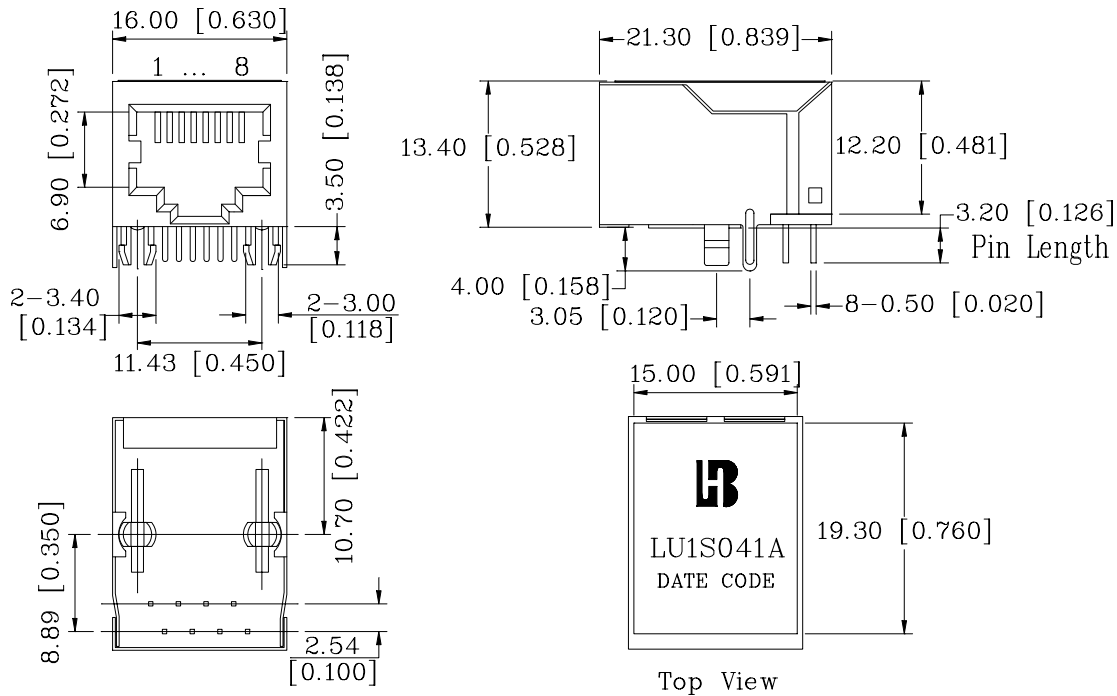

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]

0.xx±0.05[0.002]

1. Plastic Material : PBT 15% Glass Filled(UL 94V-0), Black Housing
2. Metal Shield : Brass C2680-H, 20u Nickel Plated, t=0.25mm
3. Spring Wire : 0.45mm Dia. Phosphor bronze with 6u gold plated
4. Solder Pin : 0.4x0.4mm, Phosphor bronze with solder Plated
5. Durability : 300 Mating cycles Min.

PCB Layout Mounting Hole(Top View)

