

INTELLIGENT INTERACTIVE SYNTHESIZER


SURFACE MOUNT MODEL: LFSW290342-100

WIDE BANDWIDTH


2900 - 3420 MHz

FEATURES:

- ▶ Exceptionally Low Phase Noise
- ▶ Interactive Communication
- ▶ Standard Programming Interface
- ▶ Ultra Wide Tuning Range
- ▶ Lead Free - RoHS Compliant
- ▶ Patent Pending REL-PRO® Technology
- ▶ Small Size, Surface Mount



Phase Noise

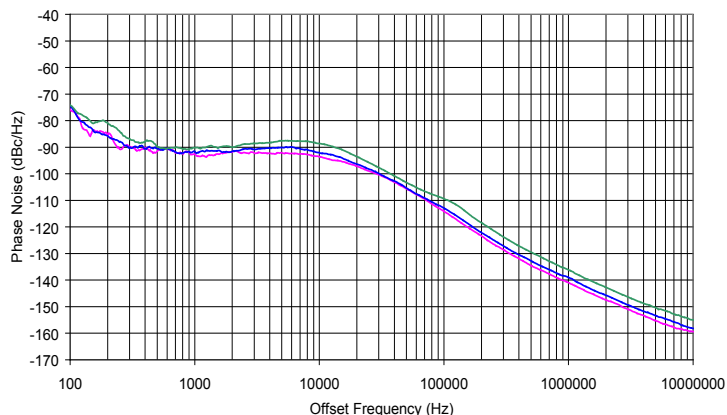



SPECIFICATIONS (Rev. E 11/17/06)

Frequency	2900 - 3420 MHz		
Step Size	1000 kHz		
Reference Input Frequency	10 MHz		
Reference Input Voltage	1 V p-p to 2.5 V p-p		
Bias Voltage	Vcc	V (Vdc)	I (mA Max)
	Digital	+5	60
	VCO	+5	60
	Converter	+5	60
Output Power	+7 dBm (Min)		
Spurious Suppression	70 dBc (Min)		
Harmonic Suppression	10 dBc (Min)		
Settling Time	15 mSec (Max)*		
Output Impedance	50 Ohms		
Typical Phase Noise	Offset	Phase Noise	
	@ 1 kHz	-85 dbc/Hz	
	@ 10 kHz	-87 dbc/Hz	
	@ 100 kHz	-107 dbc/Hz	
Operating Temperature Range	-30 to +85 °C		
Programming	See Application Note: AN7100		
* From the rising edge of LE to stable lock detect			

* From the rising edge of LE to stable lock detect


Package # 197LF

Package Style Surface Mount




PIN-OUT
 Pin 5 - RF Out
 Pin 7 - Lock Detect Out
 Pin 9 - Data In
 Pin 10 - Error Flag
 Pin 11 - Clock In
 Pin 16 - Reset
 Pin 19 - Latch Enable In
 Pin 21 - Ref In
 Pin 23 - Vcc(Digital)
 Pin 24 - Vtune
 Pin 25 - Vcc(VCO)
 Pin 26 - Vout(Converter)
 Pin 27 - Vcc(Tune)
 Pin 28 - Vcc(Converter)
 Pin 8,12,13 - No Connection
 Pin 14,15,17 - No Connection
 All Others - Ground

*Connect externally. Bypassed with a 10uF 35V Tantalum Capacitor.



OPTIONAL SOLDER AREA FOR HIGH VIBRATION ENVIRONMENT

RECOMMENDED PCB LAYOUT

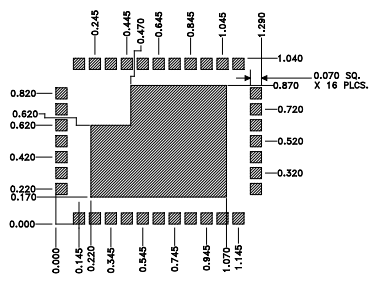

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7200

This product is manufactured under one or more of the following patents:
 Approved: 5,160,810; 5,122,621; 5,390,349; 5,416,449; 5,650,754; 5,805,431; 6,525,623; 6,850,575; 7,088,189; 7,180,381
 Pending: 60/493075; 60/501371 & 60/501790; 60/527957 & 60/528670; 60/563481; 60/564173; 60/589090; 60/601823;
 60/605791; EV31369834; 11/259766; 60/622485 & 60/710310; 10/937525/60/736901; 60/732787
 Copyright © Synergy Microwave Corporation
 201 McLean Boulevard • Paterson, New Jersey 07504 • Tel: (973) 881-8800 • Fax: (973) 881-8361
 E-Mail: sales@synergymw.com • World Wide Web: http://www.synergymw.com



INTELLIGENT INTERACTIVE SYNTHESIZER


SURFACE MOUNT MODEL: LFSW290342-100

WIDE BANDWIDTH


2900 - 3420 MHz

PERFORMANCE PLOTS

REFERENCE SIDEBAND SUPPRESSION

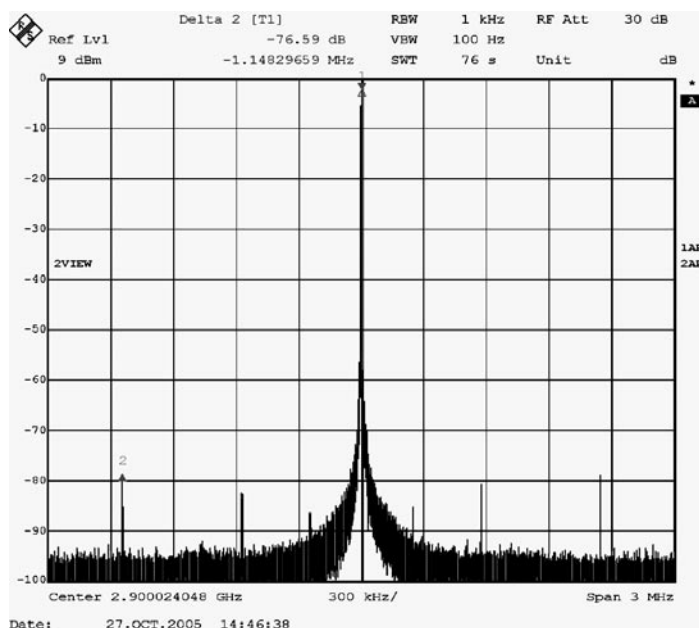

TYPICAL HARMONIC REJECTION

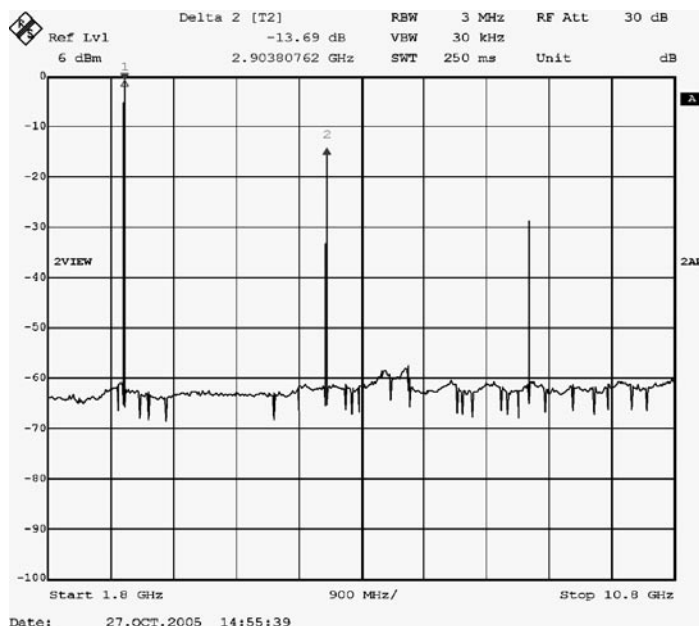

This product is manufactured under one or more of the following patents:

Approved: 5,160,810; 5,122,621; 5,390,349; 5,416,449; 5,650,754; 5,805,431; 6,525,623; 6,850,575; 7,088,189; 7,180,381
Pending: 60/493075; 60/501371 & 60/501790; 60/527957 & 60/528670; 60/563481; 60/564173; 60/589090; 60/601823;
60/605791; EV31369834; 11/259766; 60/622485 & 60/710310; 10/937525/60/736901; 60/732787

Copyright © Synergy Microwave Corporation

201 McLean Boulevard • Paterson, New Jersey 07504 • Tel: (973) 881-8800 • Fax: (973) 881-8361
E-Mail: sales@synergymw.com • World Wide Web: <http://www.synergymw.com>




INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSW290342-100


WIDE BANDWIDTH

2900 - 3420 MHz

REFERENCE SIDEBAND SUPPRESSION

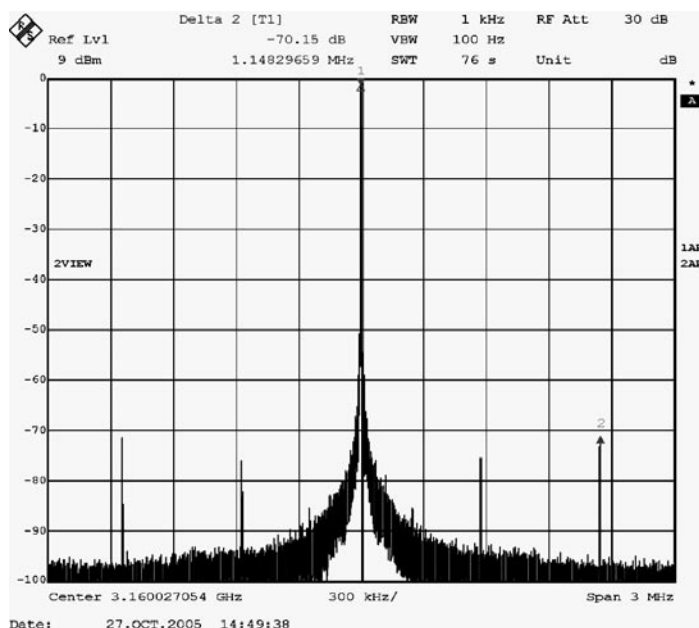

TYPICAL HARMONIC REJECTION

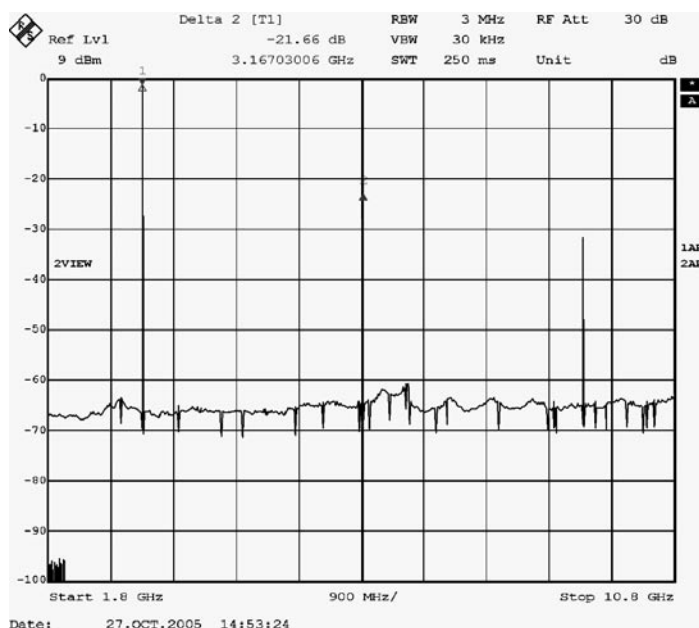

PERFORMANCE PLOTS

This product is manufactured under one or more of the following patents:
Approved: 5,160,810; 5,122,621; 5,390,349; 5,416,449; 5,650,754; 5,805,431; 6,525,623; 6,850,575; 7,088,189; 7,180,381
Pending: 60/493075; 60/501371 & 60/501790; 60/527957 & 60/528670; 60/563481; 60/564173; 60/589090; 60/601823;
60/605791; EV31369834; 11/259766; 60/622485 & 60/710310; 10/937525/60/736901; 60/732787
Copyright © Synergy Microwave Corporation
201 McLean Boulevard • Paterson, New Jersey 07504 • Tel: (973) 881-8800 • Fax: (973) 881-8361
E-Mail: sales@synergymicrowave.com • World Wide Web: <http://www.synergymicrowave.com>




INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSW290342-100


WIDE BANDWIDTH

2900 - 3420 MHz

REFERENCE SIDEBAND SUPPRESSION

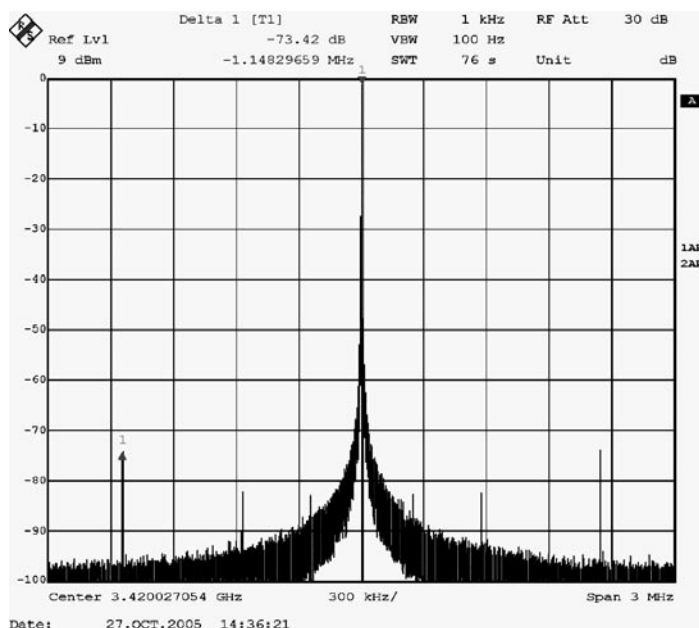

TYPICAL HARMONIC REJECTION

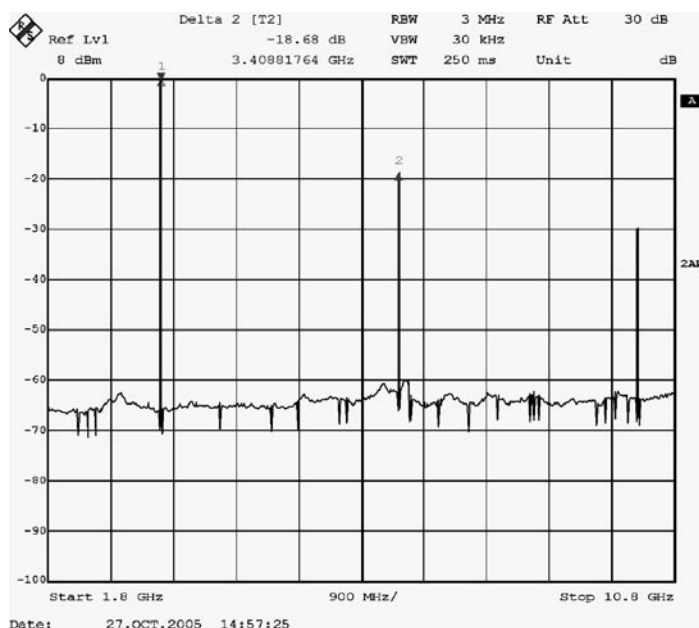

PERFORMANCE PLOTS

This product is manufactured under one or more of the following patents:

Approved: 5,160,810; 5,122,621; 5,390,349; 5,416,449; 5,650,754; 5,805,431; 6,525,623; 6,850,575; 7,088,189; 7,180,381
Pending: 60/493075; 60/501371 & 60/501790; 60/527957 & 60/528670; 60/563481; 60/564173; 60/589090; 60/601823;
60/605791; EV31369834; 11/259766; 60/622485 & 60/710310; 10/937525/60/736901; 60/732787

Copyright © Synergy Microwave Corporation

201 McLean Boulevard • Paterson, New Jersey 07504 • Tel: (973) 881-8800 • Fax: (973) 881-8361
E-Mail: sales@synergymicrowave.com • World Wide Web: <http://www.synergymicrowave.com>

