

LB005 THRU LB10

**SINGLE PHASE GLASS PASSIVATED
SURFACE MOUNT FLAT BRIDGE RECTIFIER**
VOLTAGE: 50 TO 1000V CURRENT: 0.6A




FEATURE

Ideal for printed circuit board
Glass passivated chip
Reliable low cost construction utilizing molded plastic technique
High surge current capability
Small size, simple installation
High temperature soldering guaranteed:
260°C/10 seconds/0.375" lead length at 5 lbs tension

MECHANICAL DATA

Terminal: Plated leads solderable per
MIL-STD 202E, method 208C
Case: UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity: Polarity symbol marked on body

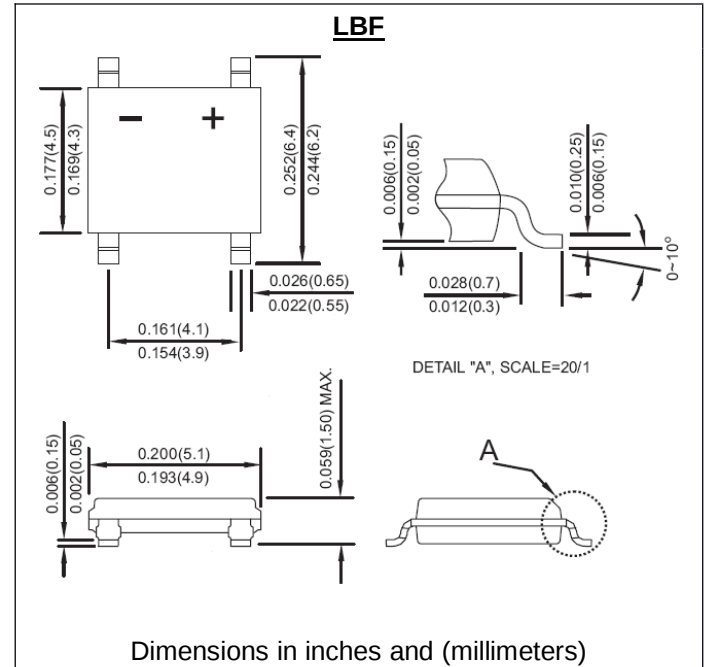

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

	Symbol	LB 005	LB 01	LB 02	LB 04	LB 06	LB 08	LB 10	Units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{rms}	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at Ta =40°C	I _{f(av)}	0.6							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	20.0							A
Maximum Instantaneous Forward Voltage at forward current 0.3A	V _f	0.95							V
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =125°C	I _r	5.0 100.0							μA
Typical Thermal resistance junction to lead on aluminum substrate on glass-epoxy P.C.B.	R _{th(jl)} R _{th(ja)}	25 62.5 80							°C/W
Storage and Operating Junction Temperature Range	T _{stg} , T _j	-55 to +150							°C

Note:

RATINGS AND CHARACTERISTIC CURVES LB005 THRU LB10

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

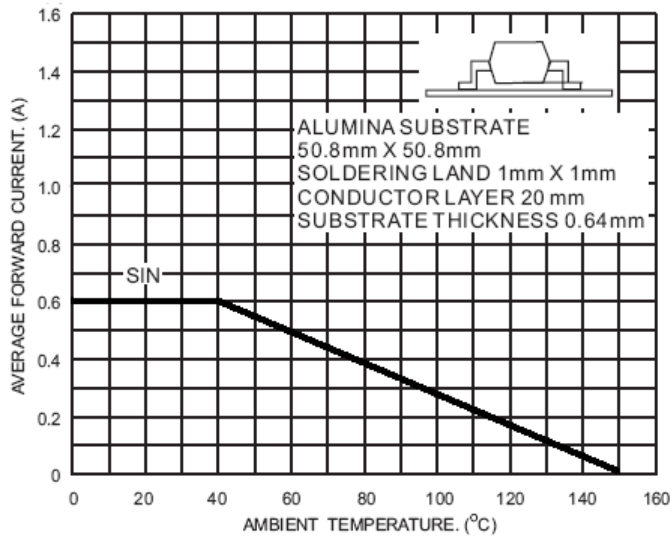


FIG.2- TYPICAL FORWARD CHARACTERISTICS

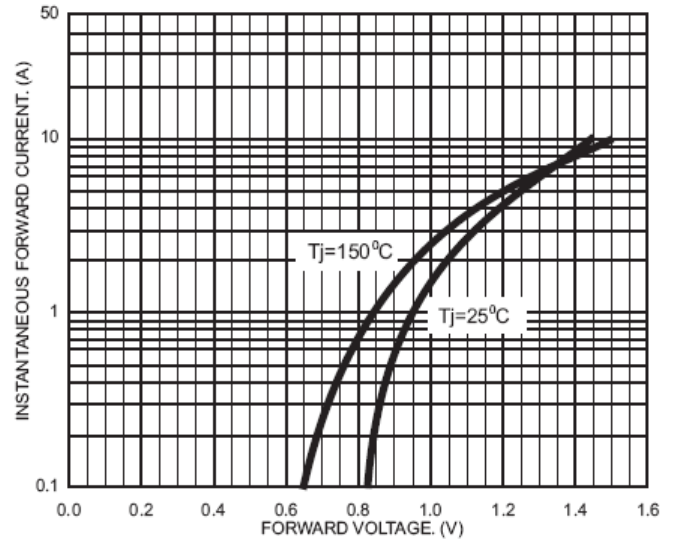


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

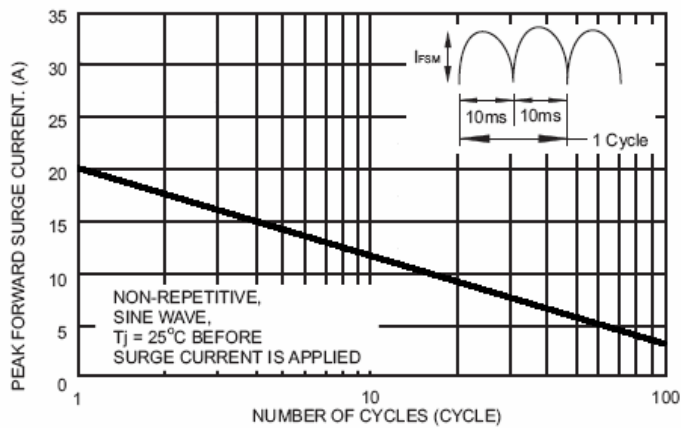


FIG.4- FORWARD POWER DISSIPATION

