

SPLITTER

FOR ADSL

LinkCom®
LinkCom Manufacturing Co., Ltd.




- Operating Temperature 0°C to 70°C
- Compliant With ITU-G.992.1 TYPE 2
- Network Access License For Telecommunication Equipment Ministry Of Information Industry PRC
- License No.19-5128-020450

Electrical Specifications @25°C

Parameter	Condition	Min	TYP	Max	Units
Attenuation (- __dB)	25KHZ	50			dB
Attenuation (- __dB)	50KHZ	60			dB
Cut off frequency	7.5KHZ		-3		dB
Attenuation distortion	0.2~3.4KHZ	-0.5		0.5	dB
Attenuation distortion	0.2~4KHZ	-1		1	dB
Insertion loss	@1004HZ			-1	dB
Longitudinal balance (- __dB)	@0.2~3KHZ	54			dB
DCR	Each line			12	ohm
Return loss (- __dB)	0.3~3.4KHZ	18			dB
Tip to ground & Ring to ground DCR		5			Mohm
DC current carrying capacity				110	mA
Delay distortion	0.6~3.2KHZ			200	uS
Delay distortion	0.2~4KHZ			250	uS

SCHEMATICS

LAF0012-C

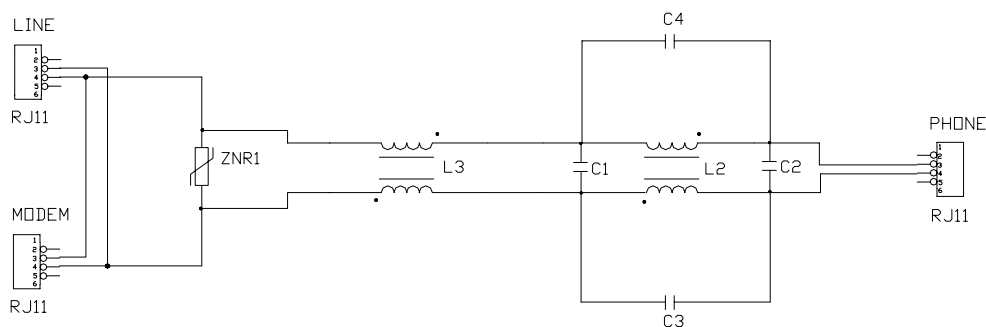


SPLITTER

FOR ADSL

LinkCom[®]
LinkCom Manufacturing Co., Ltd.

MECHANICAL

LAF0012-C

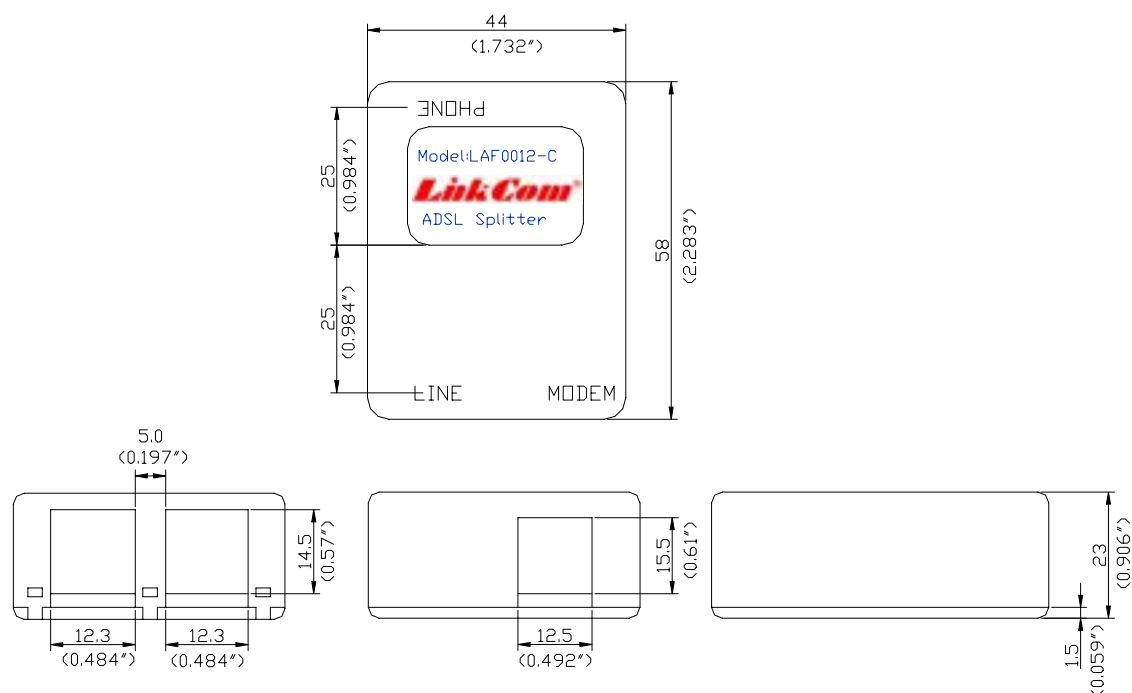

www.linkcom.com.tw For more information, please contact with :sales@linkcom.com.tw