

KTE8000/KTU8000...CS Series

Submersible pressure transducers



FEATURES

- 0...250 mbar to 0...2000 mbar, 0...5 to 0...30 psi gage
- For corrosive media
- 4...20 mA output
- Field interchangeable

MEDIA COMPATIBILITY

Wetted materials:
PPS, ceramic Al_2O_3 , NBR (Viton), PUR (PE)¹¹

Housing:
protection class IP 68 (according to DIN EN 60529)
respectively NEMA 6P¹




SPECIFICATIONS^{9,10}

Maximum ratings

Supply voltage ² (reverse polarity protection)	9...32 V
Temperature limits	
Storage	-40 to 70°C
Operating	-25 to 70°C
Compensated	0 to 70°C
Vibration (5 to 500 Hz)	10 g _{RMS}
Mechanical shock	50 g
Proof pressure ³	2 x rated pressure

ELECTRICAL CONNECTION

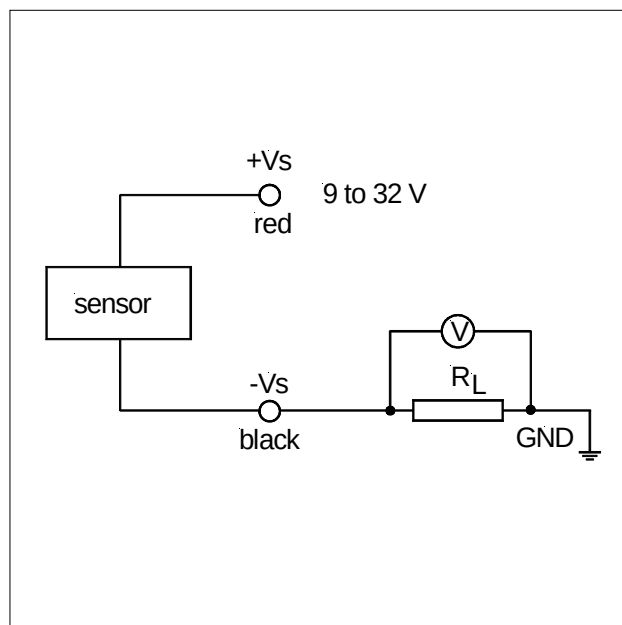

KTE8000/KTU8000...CS Series

Submersible pressure transducers

INDIVIDUAL PERFORMANCE CHARACTERISTICS

(unless otherwise noted, $V_s = 15\text{ V}$, $R_L = 100\ \Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Operating pressure	KTEM8250...	0		250	mbar
	KTEM8400...	0		400	
	KTEM8600...	0		600	
	KTEM81K0...	0		1000	
	KTEM81K6...	0		1600	
	KTEM82K0...	0		2000	
	KTU8005...	0		5	psi
	KTU8010...	0		10	
	KTU8015...	0		15	
	KTU8020...	0		20	
	KTU8030...	0		30	
Zero pressure offset		3.9	4.0	4.1	mA
Full scale span ⁷		15.9	16.0	16.1	
Thermal effects ⁴ (0 to 70°C)	Offset	0.25 bar / 5 psi / 2.5 mH ₂ O		±0.04	%FSO/°C
		< 1 bar / 15 psi / 10 mH ₂ O		±0.03	
		all others		±0.02	
	Span			±0.02	
				±0.04	
				±0.04	
Thermal effects (-25 to 0°C)	Offset	< 1 bar / 15 psi / 10 mH ₂ O		±0.06	%FSO/°C
		all others		±0.03	
	Span			±0.03	
Non-linearity, hysteresis (BSL) and repeatability ⁵			±0.1	±0.3	%FSO
Output noise (0 < f < 1 kHz)			±0.2		
Long term stability ⁶			±0.2		
Response time (10 to 90 %)			1	5	ms
Power supply rejection	Offset		±0.05		%FSO/V
	Span		±0.05		

Specification notes:

1. The package is an all-sealed housing. For proper function the gage port is vented to the atmosphere through the connecting cable. Thus the vent tube of the cable end must have access to the ambient pressure.
2. The minimum supply voltage is directly proportional to the load resistance seen by the transmitter. For more details see the [load limitation](#) diagram.
3. Proof pressure is the maximum pressure which may be applied without causing damage to the sensing element.
4. Thermal effects tested and guaranteed from 0...70°C relative to 25°C. All specifications shown are relative to 25°C.
5. Non-linearity refers to the **Best Straight Line** fit measured for offset, full scale span and 1/2 full scale span.
6. Long term stability is the change in output after one year or 1 million pressure cycles.
7. Span is the arithmetic difference in transmitter output signal measured at zero pressure and the maximum operating pressure.
8. Tests are in accordance with EN61000-6-2, April 1999.
9. CE-labelling is in accordance with 89/336/EEC.
10. The pressure transmitters must not be used as safety accessories according to article 1, 2.1.3 of the directive 97/23/EC.
11. Other sealing materials are available on request.


KTE8000/KTU8000...CS Series

Submersible pressure transducers

ELECTROMAGNETIC CAPABILITY⁸

	Test conditions	Criterion	Interference
Radiated, radio frequency electromagnetic field immunity (RFI)	EN61000-4-3: Grade 3 10 V/m, 80 MHz to 1000 MHz 80 % AMC (1 kHz)	A	<1 % FSO
Electrical fast transient / burst immunity (EFT)	EN61000-4-4: Grade 3 ±2 kV	B	<1 % FSO
Electrostatic discharge immunity test (ESD)	EN61000-4-2: Grade 4 ±4 kV, contact discharge ± 8kV, air discharge	B	<1 % FSO
Immunity to conducted disturbances induced by radio-frequency fields	EN61000-4-6: Grade 3 0,15 to 80 MHz 10 V, 80 % AMC (1 kHz)	A	<1 % FSO
Surge immunity	EN61000-4-5: Grade 1 ±0.5 kV, symmetric/asymmetric Grade 2 ±1 kV, asymmetric	B	<1 % FSO


LOAD LIMITATION

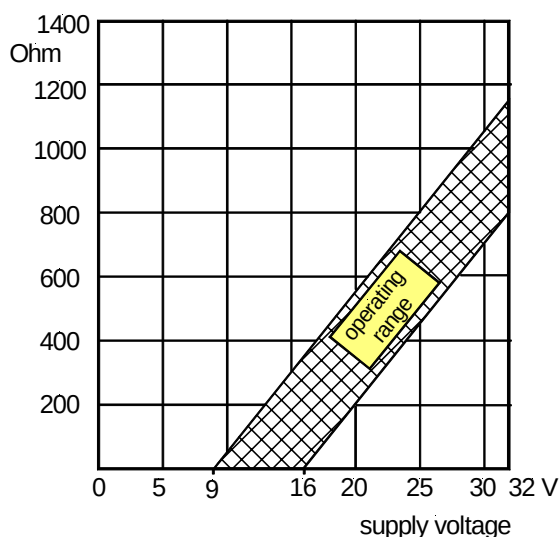

KTE8000/KTU8000...CS Series

Submersible pressure transducers

OUTLINE DRAWING

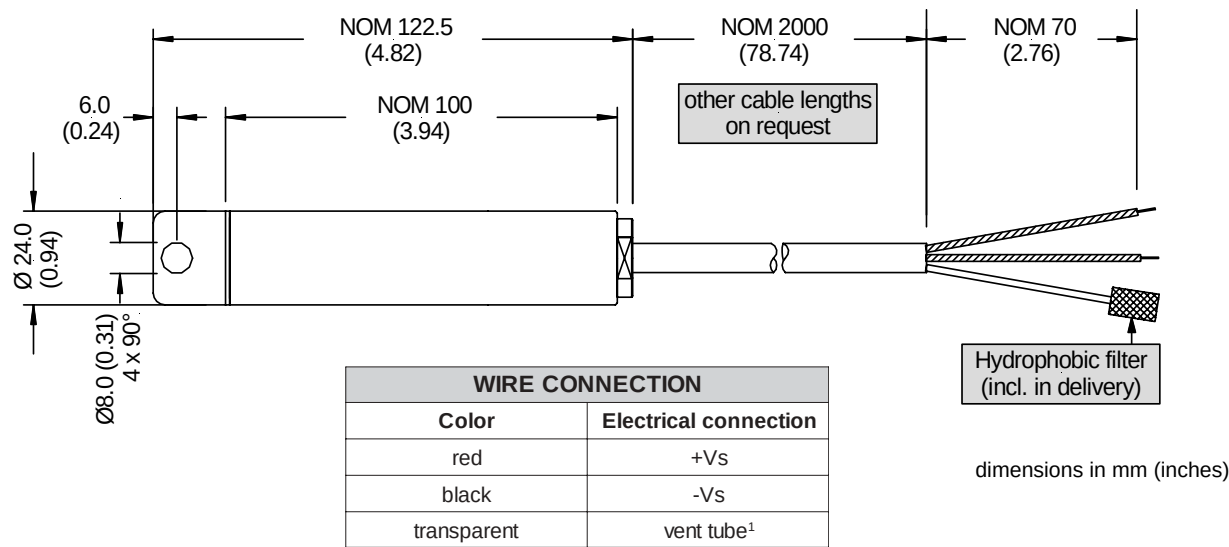

ORDERING INFORMATION

calibration E: calibration in mbar U: calibration in psi	KTx	M	8xxx	G	4	C	x	S	x	x	sealing material V: Viton N: NBR
mbar-ranges (only)											cable material E: PE U: PUR
pressure range											submersible
250: 0 to 250 mbar	005: 0 to 5 psi										cable length in m
400: 0 to 400 mbar	010: 0 to 10 psi										cable version
600: 0 to 600 mbar	015: 0 to 15 psi										output signal 4: 4...20 mA
1K0: 0 to 1000 mbar	020: 0 to 20 psi										
1K6: 0 to 1600 mbar	030: 0 to 30 psi										
2K0: 0 to 2000 mbar											
pressure mode G: gage pressure											

Note: Other pressure ranges and options are widely available.
Please contact your nearest Sensortechonics sales representative.

Sensortechonics reserves the right to make changes to any products herein. Sensortechonics does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.