


features

- Surface mount
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Marking: Black body color with white marking (0603, 0805, 1008)
White body color with no marking (0402)
- Products with lead-free terminations meet EU RoHS requirements

dimensions and construction

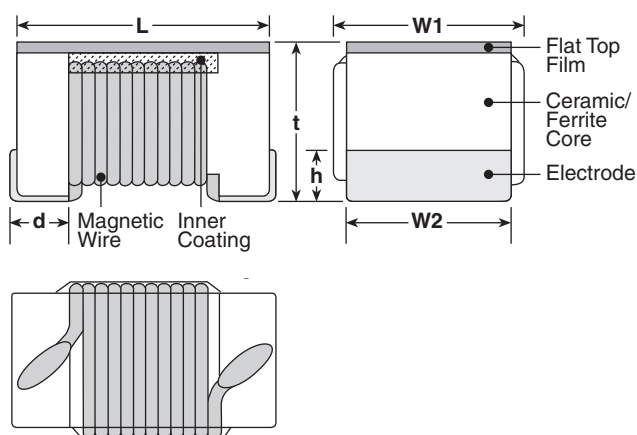

Size Code	Dimensions inches (mm)					
	L	W1	W2	t	h	d
KQT0402	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)
KQ0603	.063±.004 (1.6±0.1)	.039±.004 (1.0±0.1)	.033±.004 (0.85±0.1)	.035±.004 (0.9±0.1)	.01±.006 (0.25±0.15)	.014±.004 (0.35±0.1)
KQ0805	.079±.008 (2.0±0.2)	.059±.008 (1.5±0.2) (3.3nH-390nH)	.053±.004 (1.35±0.1)	.051±.008 (1.3±0.2)	.016±.006 (0.40±0.15)	.018±.004 (0.45±0.1)
		.063±.008 (1.6±0.2) (470nH-820nH)				
KQ1008	.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.079±.004 (2.0±0.1)	.071 ⁺⁰⁰⁸ ₋₀ (1.8 ^{+0.2} ₋₀)	.018±.006 (0.45±0.15)	.018±.004 (0.45±0.1)

ordering information

New Part #	KQ	1008	T	TE	10N	J
Type	KQ KQT	Size Code 0402 0603 0805 1008	Termination Material T: Sn	Packaging TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel)	Nominal Resistance 10N: 10nH R10: 0.1μH 1R0: 1.0μH	Tolerance B: ±0.1nH C: 0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20%

For further information on packaging, please refer to Appendix A.

applications and ratings

	Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
NEW	KQT0402T**1N0*	—	1.0	250	B: ±0.1nH C: ±0.2nH	16	250	11000	0.045	1360
	KQT0402T**1N9*		1.9					9600	0.070	1040
	KQT0402T**2N0*		2.0			8000				
	KQT0402T**2N2*		2.2					H: ±3% J: ±5% K: ±10%	0.120	700
	KQT0402T**2N4*		2.4		18	7200				
	KQT0402T**2N7*		2.7						17	6000
	KQT0402T**3N3*		3.3		19	5800				
	KQT0402T**3N6*		3.6						18	4800
	KQT0402T**3N9*		3.9		20	5800				
	KQT0402T**4N3*		4.3						22	4400
	KQT0402T**4N7*		4.7		20	4160				
	KQT0402T**5N1*		5.1						20	4000
	KQT0402T**5N6*		5.6		21	3900				
	KQT0402T**6N2*		6.2						24	3680
	KQT0402T**6N8*		6.8		3450	0.180				
	KQT0402T**7N5*		7.5							3280
	KQT0402T**8N2*		8.2		3100	0.200				
	KQT0402T**8N7*		8.7						25	0.230
	KQT0402T**9N0*		9.0		24	3040				
	KQT0402T**9N5*		9.5						25	3000
	KQT0402T**10N*		10		24	2800				
	KQT0402T**11N*		11						2720	0.214
	KQT0402T**12N*		12		2700	0.322				
	KQT0402T**13N*		13						2480	0.298
	KQT0402T**15N*		15		2400	0.354				
	KQT0402T**16N*		16						0.393	340
	KQT0402T**18N*		18		0.550	320				
	KQT0402T**19N*		19						0.560	300
	KQT0402T**20N*		20		0.620	320				
	KQT0402T**22N*		22						0.810	300
	KQT0402T**23N*		23		2100	0.830				
	KQT0402T**24N*		24						0.835	240
	KQT0402T**27N*		27		1.170	200				
	KQT0402T**30N*		30						1.120	200
	KQT0402T**33N*		33		1800	1.800				
	KQT0402T**34N*		34						1600	2.090
	KQT0402T**36N*		36		1500	2.320				
	KQT0402T**39N*		39						2000	2.320
	KQT0402T**40N*		40		2000	2.320				
	KQT0402T**43N*		43						2000	2.320
	KQT0402T**47N*		47		2000	2.320				
	KQT0402T**51N*		51						2000	2.320
	KQT0402T**56N*		56		2000	2.320				
	KQT0402T**68N*		68						2000	2.320
	KQT0402T**82N*		82		2000	2.320				
	KQT0402T**R10*		100						2000	2.320
	KQT0402T**R12*		120		2000	2.320		120		

* Add tolerancing character (B, C, G, H, J, K, M)

** Add packaging code

For complete environmental specifications, please refer to pages 222-223.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

2/27/07

applications and ratings (continued)

	Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
NEW	KQ0603TTE1N6*	C	1.6	250	J: ±5% K: ±10%	24	250	12500	0.03	700
	KQ0603TTE1N8*	0	1.8			16			0.045	
	KQ0603TTE3N3*	X	3.3			22		6900	0.055	
	KQ0603TTE3N6*	E	3.6						0.063	
	KQ0603TTE3N9*	1	3.9						0.08	
	KQ0603TTE4N3*	F	4.3			5900		0.063		
	KQ0603TTE4N7*	G	4.7					5800	0.116	
	KQ0603TTE5N1*	Y	5.1			0.115				
	KQ0603TTE6N8*	2	6.8		27	0.11				
	KQ0603TTE7N5*	H	7.5		28	4800		0.106		
	KQ0603TTE8N2*	A	8.2			4600		0.12		
	KQ0603TTE8N7*	J	8.7					0.109		
	KQ0603TTE9N5*	B	9.5		4800	0.125				
	KQ0603TTE10N*	3	10			0.13				
	KQ0603TTE11N*	K	11		4000	0.086				
	KQ0603TTE12N*	4	12			0.13				
	KQ0603TTE15N*	5	15			0.17				
	KQ0603TTE16N*	L	16		34	3300		0.104		
	KQ0603TTE18N*	6	18		35	3100		0.17		
	KQ0603TTE22N*	7	22		38	3000		0.19		
	KQ0603TTE23N*	S	23		37	2700		0.15		
	KQ0603TTE24N*	M	24			2650		0.135		
	KQ0603TTE27N*	8	27		40	2800		0.22	600	
	KQ0603TTE30N*	N	30		37	2250		0.144		
	KQ0603TTE33N*	9	33		40	2300		0.22		
	KQ0603TTE36N*	P	36	38	2080	0.25				
	KQ0603TTE39N*	0	39	40	2200					
	KQ0603TTE43N*	Q	43	39	2000	0.28				
	KQ0603TTE47N*	1	47	200	38	200	1900	0.30		
	KQ0603TTE51N*	T	51				0.31			
	KQ0603TTE56N*	2	56		37	1700	0.34			
	KQ0603TTE68N*	3	68				0.49	400		
	KQ0603TTE72N*	4	72	34	150	0.54				
	KQ0603TTE82N*	5	82			1400	0.58			
	KQ0603TTER10*	6	100	150	32	1350	0.61	300		
	KQ0603TTER11*	7	110			1300	0.65			
	KQ0603TTER12*	8	120			1400	1.4	160		
	KQ0603TTER15*	9	150		100	25	100	1300	2.2	140
	KQ0603TTER18*	0	180	1200				2.3	130	
	KQ0603TTER20*	U	200					2.5	120	
	KQ0603TTER21*	V	210	1000				2.4		
	KQ0603TTER22*	1	220			24	900	2.3	170	
KQ0603TTER25*	W	250	30	840			3.17	110		
KQ0603TTER27*	2	270		800			3.0	100		
KQ0603TTER30*	X	300		700		3.7	80			
KQ0603TTER33*	3	330	50	J: ±5% K: ±10%	50	640	1.21	190		
KQ0603TTER39*	4	390				610	1.26	170		
KQ0603TTER47*	5	470								
KQ0603TTER51*	V	510								

* Add tolerance character (B, C, G, H, J, K, M)

For complete environmental specifications, please refer to pages 222-223.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/08

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)			
KQ0603TTER56*	6	560	50	J: ±5% K: ±10%	30	50	560	2.09	130			
KQ0603TTER62*	W	620					590	1.89	150			
KQ0603TTER68*	7	680					540	1.97	140			
KQ0603TTER75*	X	750					530	2.04	130			
KQ0603TTER82*	8	820					490	3.09	110			
KQ0603TTER91*	Y	910					480	2.95	120			
KQ0603TTE1R0*	9	1000					440	5.13	90			
KQ0603TTE1R2*	0	1200					400	5.45	80			
KQ0805TTE3N3*	0	3.3					250	G: ±2% J: ±5% K: ±10%	50	1500	6000	0.08
KQ0805TTE6N8*	1	6.8	1000	5500	0.11							
KQ0805TTE8N2*	2	8.2	4700	0.12								
KQ0805TTE12N*	3	12	500	4000	0.15							
KQ0805TTE15N*	4	15		3400	0.17							
KQ0805TTE18N*	5	18		3300	0.20							
KQ0805TTE20N*	Y	20		55	2600	0.22						
KQ0805TTE22N*	6	22	2500		0.25							
KQ0805TTE27N*	7	27	60		2050	0.27						
KQ0805TTE33N*	8	33			2000	0.29						
KQ0805TTE39N*	9	39			1650	0.34						
KQ0805TTE43N*	4	43		200	1550	0.34						
KQ0805TTE47N*	0	47			1450	0.38						
KQ0805TTE56N*	1	56	1300		0.42							
KQ0805TTE68N*	2	68	1200		0.46							
KQ0805TTE82N*	3	82	150		1100	0.51						
KQ0805TTER10*	4	100		50	920	0.56						
KQ0805TTER12*	5	120			870	0.64						
KQ0805TTER15*	6	150			250	850	0.70					
KQ0805TTER16*	H	160				48	650	1.0				
KQ0805TTER17*	J	170	50				600	1.4				
KQ0805TTER18*	7	180		560			1.5					
KQ0805TTER19*	D	190		375			1.76					
KQ0805TTER20*	E	200		340	1.9							
KQ0805TTER21*	F	210		25	J: ±5% K: ±10%	23	50	188	2.2	190		
KQ0805TTER22*	8	220	215					2.35	180			
KQ0805TTER23*	K	230	50					J: ±5% K: ±10% M: ±20%	50	4100	0.08	1000
KQ1008TTE10N*	10N	10								3300	0.09	
KQ1008TTE12N*	12N	12								3000	0.10	
KQ1008TTE15N*	15N	15		350	2500	0.11						
KQ1008TTE18N*	18N	18										

* Add tolerance character (C, G, H, J, K, M)

For complete environmental specifications, please refer to pages 222-223.

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)			
KQ1008TTE22N*	22N	22	50	J: ±5% K: ±10% M: ±20%	55	350	2400	0.12	1000			
KQ1008TTE27N*	27N	27			60		1600	0.13				
KQ1008TTE33N*	33N	33					1500	0.14				
KQ1008TTE39N*	39N	39			65			1300		0.15		
KQ1008TTE47N*	47N	47					1000	0.16				
KQ1008TTE56N*	56N	56			60			0.18				
KQ1008TTE68N*	68N	68					950	0.20				
KQ1008TTE82N*	82N	82			850			0.22				
KQ1008TTER10*	R10	100	25	G: ±2% J: ±5% K: ±10%		45	100	0.56	650			
KQ1008TTER12*	R12	120			0.63							
KQ1008TTER15*	R15	150			750			0.70	580			
KQ1008TTER18*	R18	180			700			0.77	620			
KQ1008TTER22*	R22	220			600			0.84	500			
KQ1008TTER27*	R27	270			570			0.91	500			
KQ1008TTER33*	R33	330			500			1.05	450			
KQ1008TTER39*	R39	390			450			1.12	470			
KQ1008TTER47*	R47	470			415			1.19				
KQ1008TTER56*	R56	560			375			1.33	400			
KQ1008TTER62*	R62	620			360			1.40	300			
KQ1008TTER68*	R68	680						1.47	400			
KQ1008TTER75*	R75	750			320			1.54	360			
KQ1008TTER82*	R82	820			290			1.61	400			
KQ1008TTER91*	R91	910			35			50	320	1.68	380	
KQ1008TTE1R0*	1R0	1000							290	1.75	370	
KQ1008TTE1R2*	1R2	1200							28	250	1.6	310
KQ1008TTE1R5*	1R5	1500								200	1.7	
KQ1008TTE1R8*	1R8	1800			22			25	160	1.9	270	
KQ1008TTE2R2*	2R2	2200							140	2.2	250	
KQ1008TTE2R7*	2R7	2700			20			7.9	110	2.7	230	
KQ1008TTE3R3*	3R3	3300							100	2.8		
KQ1008TTE3R9*	3R9	3900							90	3.1	210	
KQ1008TTE4R7*	4R7	4700							15	7.9	80	2.1
KQ1008TTE5R6*	5R6	5600			70			2.3			200	
KQ1008TTE6R8*	6R8	6800			65			2.5			170	
KQ1008TTE8R2*	8R2	8200			60			2.9			150	
KQ1008TTE100*	100	10000										

* Add tolerance character (C, G, H, J, K, M)

For complete environmental specifications, please refer to pages 222-223.


Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/22/08


environmental applications

L-Frequency Characteristics


KQT0402

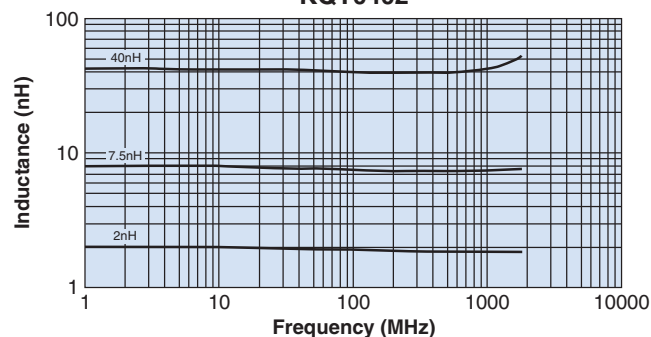


KQ0603

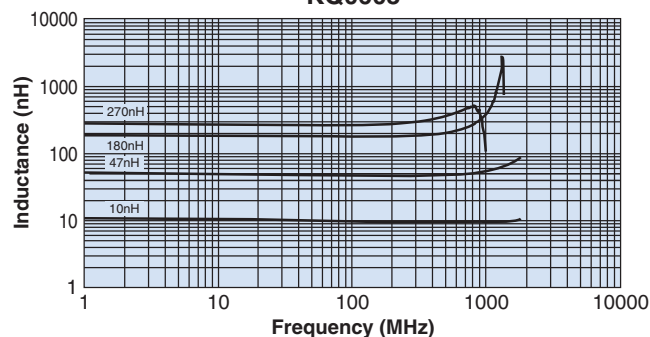

KQ0805

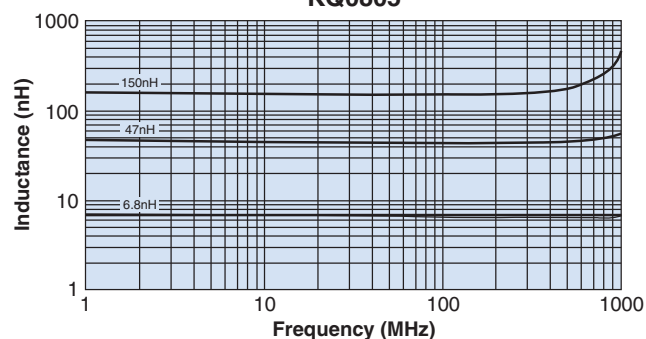


KQ1008

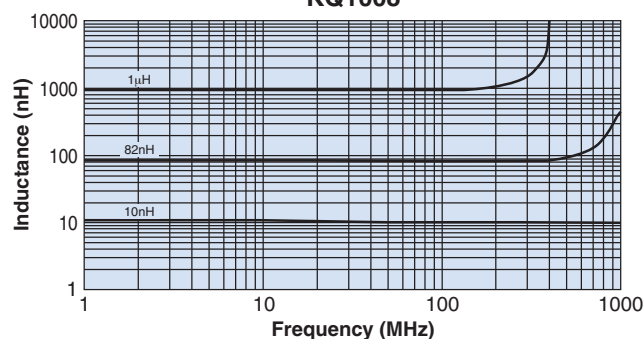


Q-Frequency Characteristics


KQT0402

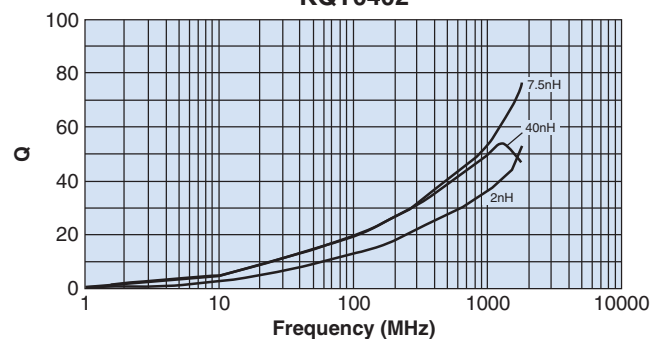


KQ0603

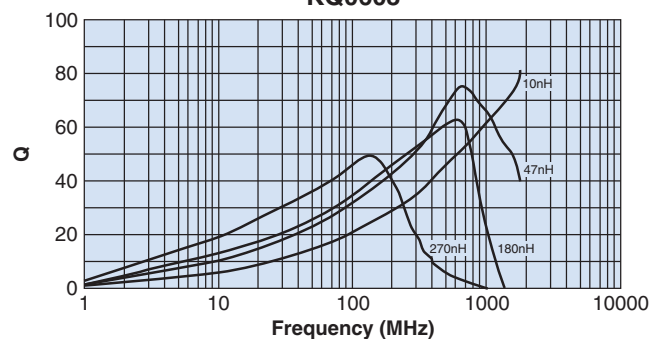

KQ0805

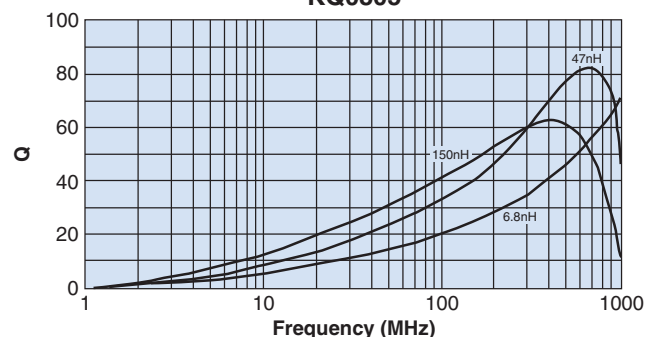

KQ1008

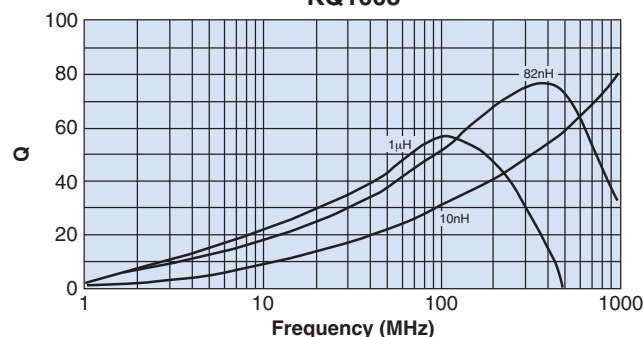

Test equipment: HP4291A impedance analyzer

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/28/04

environmental applications (continued)

Performance Characteristics

Parameter	Requirements Maximum Limit	Δ L/L Typical	Test Method
Resistance to Soldering Heat	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 2.7\%$ Δ Q/Q: $\pm 6.6\%$	260°C $\pm$ 5°C, 10s $\pm$ 1s
Rapid Change of Temperature	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 2.1\%$ Δ Q/Q: $\pm 5.3\%$	-40°C (30min.)/ +125°C (30min.) 100 cycles
Low Temperature Exposure	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 1.8\%$ Δ Q/Q: $\pm 2.8\%$	-40°C $\pm$ 2°C, 1000h
High Temperature Exposure	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 1.8\%$ Δ Q/Q: $\pm 5.3\%$	125°C $\pm$ 2°C, 1000h
Moisture Exposure	No significant abnormality in appearance Δ L/L: $\pm 5\%$, Δ Q/Q: $\pm 10\%$	Δ L/L: $\pm 0.9\%$ Δ Q/Q: $\pm 6.9\%$	40°C $\pm$ 2°C, 90%~95%RH, 1000h
Resistance to Solvent	No damage and marking shall remain legible	—	Accordance with MIL-STD 202F Method 215