


EPB5211G

- Designed for HPNA Filter Bridge Applications
- Withstands IR Reflow Profile Processes
- Hipot : 850 Vrms (1 second, Pri.-Sec.)


Electrical Parameters @ 25° C

Primary OCL ($\mu\text{H} \pm 5\%$)	Leakage Inductance (μH Max.)	Turns Ratio ($\pm 2\%$)		DCR (m Ω Max.)		
@ 10 KHz, 1.0 Vrms	@ 100 KHz, 1.0 Vrms					
1.96	0.1	1:1	1:1	100	100	100
Pins 1-6	Pins 1-6 with 2-5 & 3-4 shorted	Pins 1-6:2-5	Pins 1-6:3-4	Pins 1-6	Pins 3-4	Pins 3-4

Schematic



Package

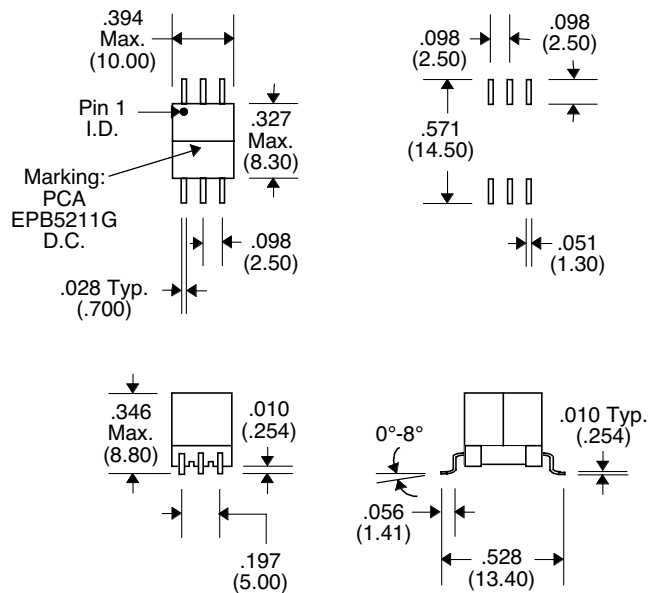

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$