
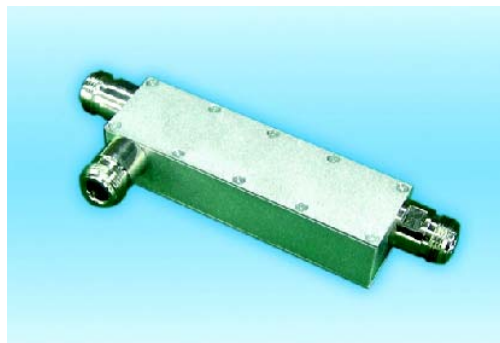


Air Dielectric Directional Coupler (15dB, 20dB)

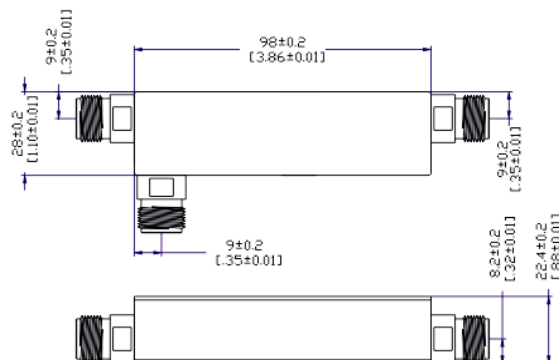

► Features

- High Power Handling, Low Insertion Loss

► Applications

- GSM, CDMA, PCS, DCS, PHS, AMPS, SMR, WCDMA Communication systems

► Technical Specifications

P/N	JXMB0H-T-800-2500-15	JXMB0H-T-800-2500-20
Frequency Range	800-2500MHz	800-2500MHz
Insertion Loss	≤0.4dB	≤0.2dB
Coupling	≤15±1.0dB	≤20±1.0dB
Directivity	≥20dB	≥20dB
VSWR	≤1.3:1	≤1.3:1
Power Handling	100W	100W
Impedance	50Ω	50Ω
Port Connector	N-Female	N-Female
Operating Temperature	-30°C ~ +70°C	-30°C ~ +70°C

