


HONGFA RELAY



MINIATURE POWER RELAY

Single-Pole, 10A , PC Board & QC terminal

JQX-14FF



- 10A switching capabilities
- SPST-NO and SPDT configurations
- 5KV dielectric between coil to contacts
- UL & CUR file No. E134517
- TÜV file No. R9659296

■ CONTACT DATA

Arrangement	SPST-NO, SPDT	
Initial Contact Resistance	50m Ω	
Max. (at 1A 24VDC)		
Contact Material	Silver alloy	
Contact Rating (Res. Load)	10A 220VAC/30VDC TV-5	
Max. switching voltage	250VAC/30VDC	
Max. switching current	10A	
Max. switching power	2200VA/300W	
UL/CUR rating	10A 277AC/30VDC 1/4HP 125VAC 1/3HP 250VAC	
TÜV rating	10A 250VAC/30VDC	
Expected	Mechanical	1X10 ⁷ (18,000 ops/h)
Life min.	Electrical	1X10 ⁵ (1800 ops/h)
operations		

■ SPECIFICATION

Initial Insulation Resistance		1000M Ω , 500VDC
Dielectric Strength		
Between coil and Contacts		5000VAC,1minute
Between open contacts		1000VAC,1minute
Surge Voltage between		10000V
Contacts and coil		(at 5.2X50us)
Operate time (at nomi. Vot.)		15ms
Release time (at nomi. Vot.)		5ms
Humidity		98%, +40℃
Ambient temperature		-40 to +70℃
Shock	Functional	100m/s ²
	Destructive	1000m/s ²
Resistance		
Vibration Resistance		1.5mm, 10 to 55Hz
Termination		PCB and QC
Unit weight		Approx. 18g
Construction		Sealed and Unsealed

■ COIL

Nominal coil power	0.55W
--------------------	-------

■ TABLE


Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. allowable Voltage VDC (at 20 °C)	Coil Resistance Tolerance: ±10% Ω
3	2.25	0.3	3.9	17
5	3.75	0.5	6.5	47
6	4.5	0.6	7.8	68
9	6.75	0.9	11.7	160
12	9.0	1.2	15.6	275
18	13.5	1.8	23.4	650
24	18.0	2.4	31.2	1100
48	36.0	4.8	62.4	4170
60	45.0	6.0	78	7000

- When require pick-up voltage<75% of nominal voltage, special order allowed.

■ ORDERING INFORMATION

JQX-14FF	—	012	—	1H	—	S
Coil voltage		Contact arrangement		Classification of type		
3,5,6,9,12,18,24 48,60VDC		1H: SPST-NO 1Z: SPDT		S: Sealed Nil: Unsealed QC: QC type		

■ OUTLINE DIMENSIONS , WIRING DIAGRAM AND PC BOARD LAYOUT

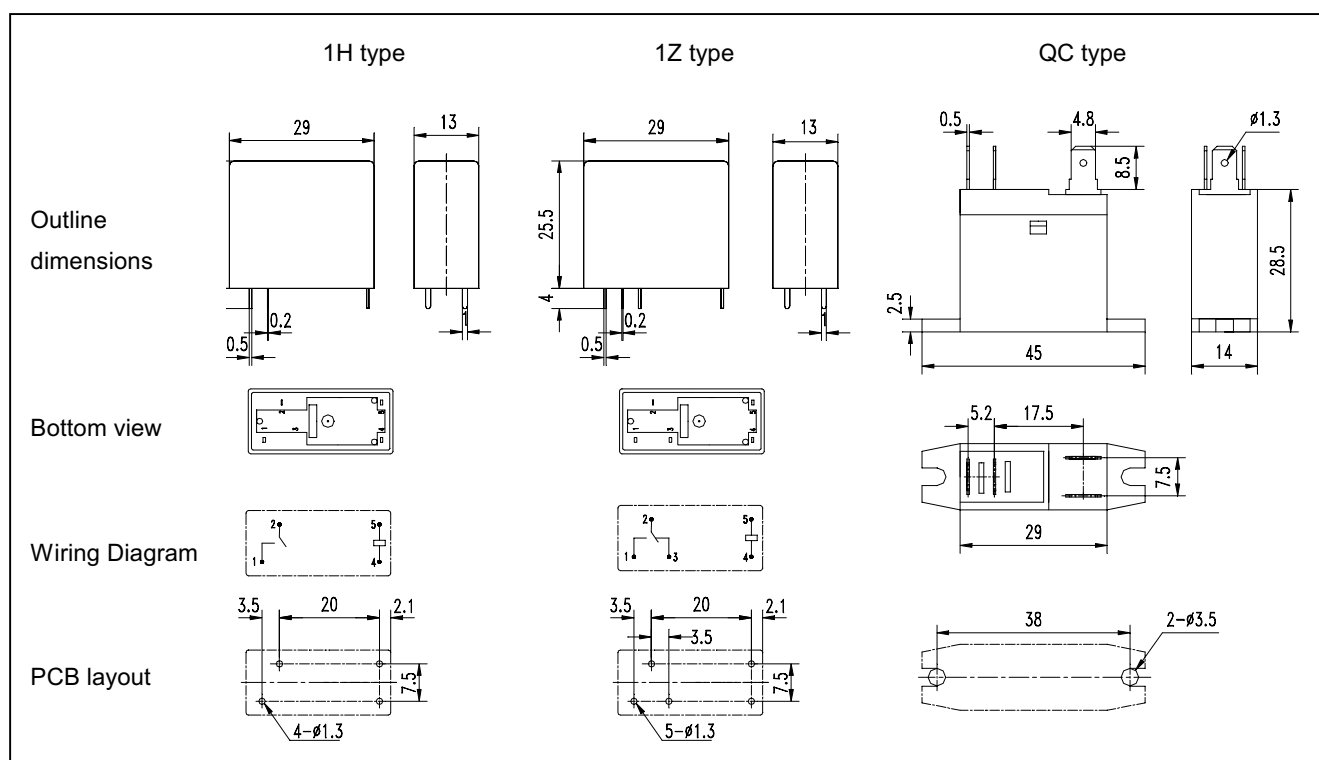

■ USEFUL CURVES

