




Surface Mount LED J Series for low current or superbright use, 0338 Series Reverse Mount




The 0338 series is designed to mount to pads on the lower side of a pcb with the LED viewed through a hole. This has the benefit maintaining all parts of the LED below the surface of the PCB, making it especially suitable for use with membrane overlays and applications where a smooth front surface is desired.

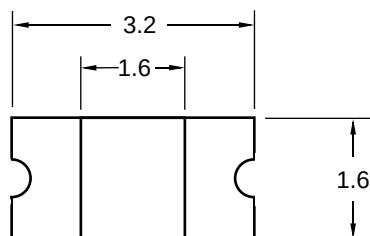

RoHS Compliant
Aug 2004

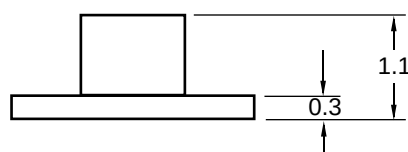

Cathode mark

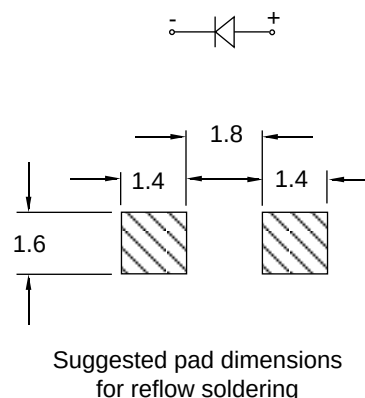

GENERAL INFORMATION

Operating Temperature Range	-40 °C to +85 °C
Storage Temperature Range	-40 °C to +90 °C
Reflow Soldering Temperature	260 °C for 5 sec max

APPLICATION INFORMATION (ALL RATINGS AT 25 °C AMBIENT)

Part No.	Emitted Color	Peak	$\Delta\lambda$	Absolute Maximum Ratings					E/O Characteristics					
		λ							I_v (mcd) @ $I_f=20\text{mA}$			V_f (V) @ $I_f=20\text{mA}$		$2\Theta_{1/2}$
		(nm)		Pd (mW)	I_f (mA) dc	I_f (mA) 1/10 duty @ 1 kHz	I_r (μA) @ $V_r=5V$	V_r (V)	2mA	Min	Typ	Min	Typ	
JRC0338	Red	632	20	60	25	160	10	5	2	16	40	2.0	2.4	130
JGC0338	Green	575	20	60	25	160	10	5	1	11	16	2.0	2.4	130
JYC0338	Yellow	591	15	60	25	160	10	5	2	16	41	2.0	2.4	130
JOC0338	Orange	621	18	60	25	160	10	5	2	16	41	2.0	2.4	130
JYOC0338	YelOrng	611	17	60	25	160	10	5	2	16	41	2.0	2.4	130

Specifications subject to change without notice. Dimensions are in mm±0.3 unless stated otherwise.

IDEA, Inc., 1351 Titan Way, Brea, CA 92821 Ph:714-525-3302, 800-LED-IDEA; Fax: 714-525-3304 0508

013S-J0338