

Radiation Hardened Quad Differential Line Receiver

The Intersil HS-26C32RH is a differential line receiver designed for digital data transmission over balanced lines and meets the requirements of EIA Standard RS-422. Radiation hardened CMOS processing assures low power consumption, high speed, and reliable operation in the most severe radiation environments.

The HS-26C32RH has an input sensitivity typically of 200mV over the common mode input voltage range of $\pm 7V$. The receivers are also equipped with input fail safe circuitry, which causes the outputs to go to a logic "1" when the inputs are open. Enable and Disable functions are common to all four receivers.

Specifications for Rad Hard QML devices are controlled by the Defense Supply Center in Columbus (DSCC). The SMD numbers listed in the "Ordering Information" table must be used when ordering.

Detailed Electrical Specifications for these devices are contained in SMD 5962-95689. A "hot-link" is provided on our homepage for downloading www.intersil.com/military/


Features

- Electrically Screened to SMD # 5962-95689
- QML Qualified per MIL-PRF-38535 Requirements
- 1.2 Micron Radiation Hardened CMOS
 - Total Dose. 300 krad(Si) (Max)
- Latch-up Free
- EIA RS-422 Compatible Inputs
- CMOS Compatible Outputs
- Input Fail Safe Circuitry
- High Impedance Inputs when Disabled or Powered Down
- Low Power Dissipation 138mW Standby (Max)
- Single 5V Supply
- Full -55°C to +125°C Military Temperature Range

Applications

- Line Receiver for MIL-STD-1553 Serial Data Bus



Logic Diagram

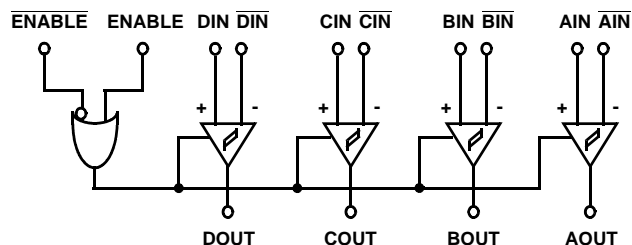


Ordering Information

ORDERING NUMBER	INTERNAL MKT. NUMBER	PART MARKING	TEMP. RANGE (°C)	PACKAGE	PKG. DWG. #
5962F9568901QEC	HS1-26C32RH-8	Q 5962F95 68901QEC	-55 to +125	16 Ld SBDIP	D16.3
5962F9568901QXC	HS9-26C32RH-8	Q 5962F95 68901QXC	-55 to +125	16 Ld FLATPACK	K16.A
5962F9568901V9A	HS0-26C32RH-Q		-55 to +125		
5962F9568901VEC	HS1-26C32RH-Q	Q 5962F95 68901VEC	-55 to +125	16 Ld SBDIP	D16.3
5962F9568901VXC	HS9-26C32RH-Q	Q 5962F95 68901VXC	-55 to +125	16 Ld FLATPACK	K16.A
HS1-26C32RH/PROTO	HS1-26C32RH/PROTO	HS1- 26C32RH /PROTO	-55 to +125	16 Ld SBDIP	D16.3
HS9-26C32RH/PROTO	HS9-26C32RH/PROTO	HS9- 26C32RH /PROTO	-55 to +125	16 Ld FLATPACK	K16.A


Pinouts

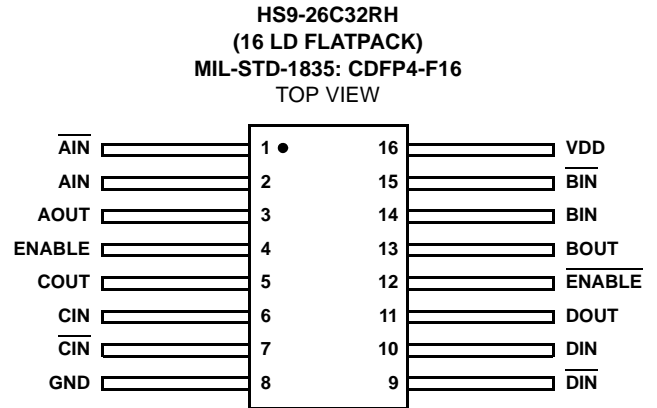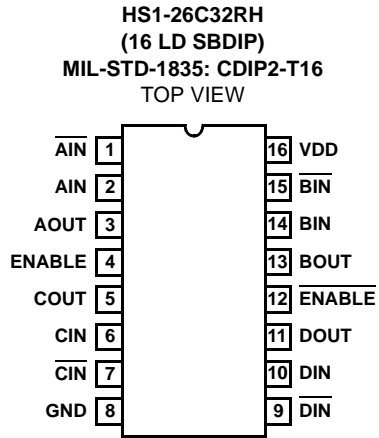


Propagation Delay Timing Diagram

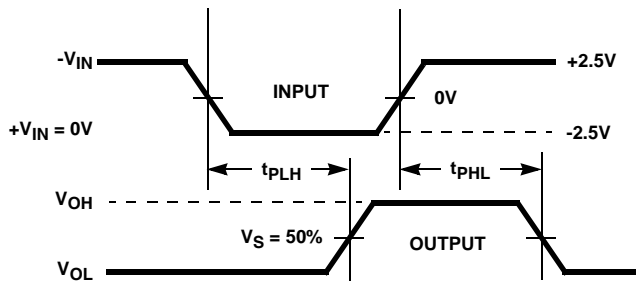

Propagation Delay Load Circuit

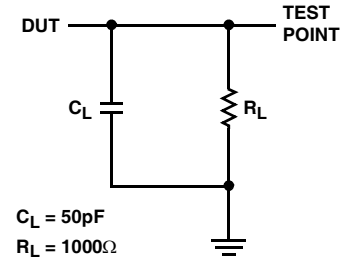

Three-State Low Timing Diagram

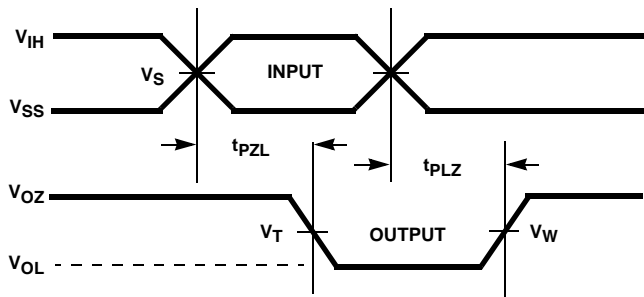

Three-State High Timing Diagrams

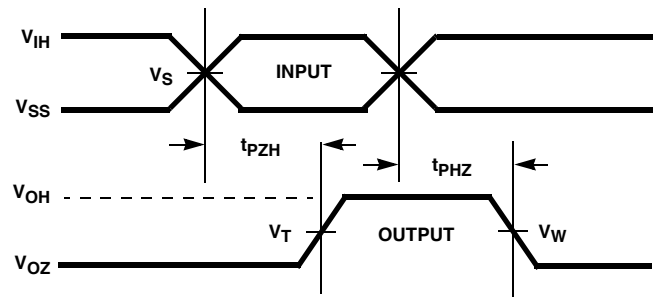



TABLE 1. THREE-STATE LOW VOLTAGE LEVELS

PARAMETER	HS-26C32RH	UNITS
V _{DD}	4.50	V
V _{IH}	4.50	V
V _S	2.25	V
V _T	50	%
V _W	V _{OL} + 0.5	V
GND	0	V


TABLE 2. THREE-STATE HIGH VOLTAGE LEVELS

PARAMETER	HS-26C32RH	UNITS
V _{DD}	4.50	V
V _{IH}	4.50	V
V _S	2.25	V
V _T	50	%
V _W	V _{OH} - 0.5	V
GND	0	V

Three-State Low Load Circuit

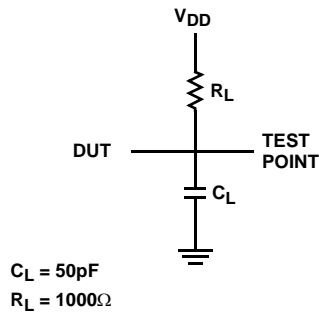

Three-State High Load Circuit

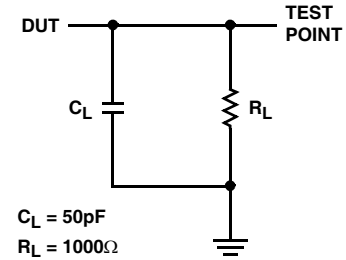

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.
Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com

Die Characteristics

DIE DIMENSIONS:

84 mils x 130 mils
(2140µm x 3290µm)

INTERFACE MATERIALS:

Glassivation:

Type: SiO₂
Thickness: 10kÅ ± 1kÅ

Top Metallization:

M1: Mo/TiW
Thickness: 5800Å
M2: Al/Si/Cu
Thickness: 5800Å

Worst Case Current Density:

<2.0 x 10⁵ A/cm²

Bond Pad Size:

110µm x 100µm

Metallization Mask Layout

