

HD74AC107/HD74ACT107

Dual JK Flip-Flop (with Separate Clear and Clock)

REJ03D0243-0200Z
(Previous ADE-205-363 (Z))
Rev.2.00
Jul.16.2004

Description

The HD74AC107/HD74ACT107 dual JK master/slave flip-flops have a separate clock for each flip-flop. Inputs to the master section are controlled by the clock pulse. The clock pulse also regulates the state of the coupling transistors which connect the master and slave sections. The sequence of operation is as follows: 1) isolate slave from master; 2) enter information from J and K inputs to master; 3) disable J and K inputs; 4) transfer information from master to slave.

Features


- Outputs Source/Sink 24 mA
- HD74ACT107 has TTL-Compatible Inputs
- Ordering Information: Ex. HD74AC107

Part Name	Package Type	Package Code	Package Abbreviation	Taping Abbreviation (Quantity)
HD74AC107FPEL	SOP-14 pin (JEITA)	FP-14DAV	FP	EL (2,000 pcs/reel)
HD74AC107RPEL	SOP-14 pin (JEDEC)	FP-14DNV	RP	EL (2,500 pcs/reel)


Notes: 1. Please consult the sales office for the above package availability.

2. The packages with lead-free pins are distinguished from the conventional products by adding V at the end of the package code.

Pin Arrangement

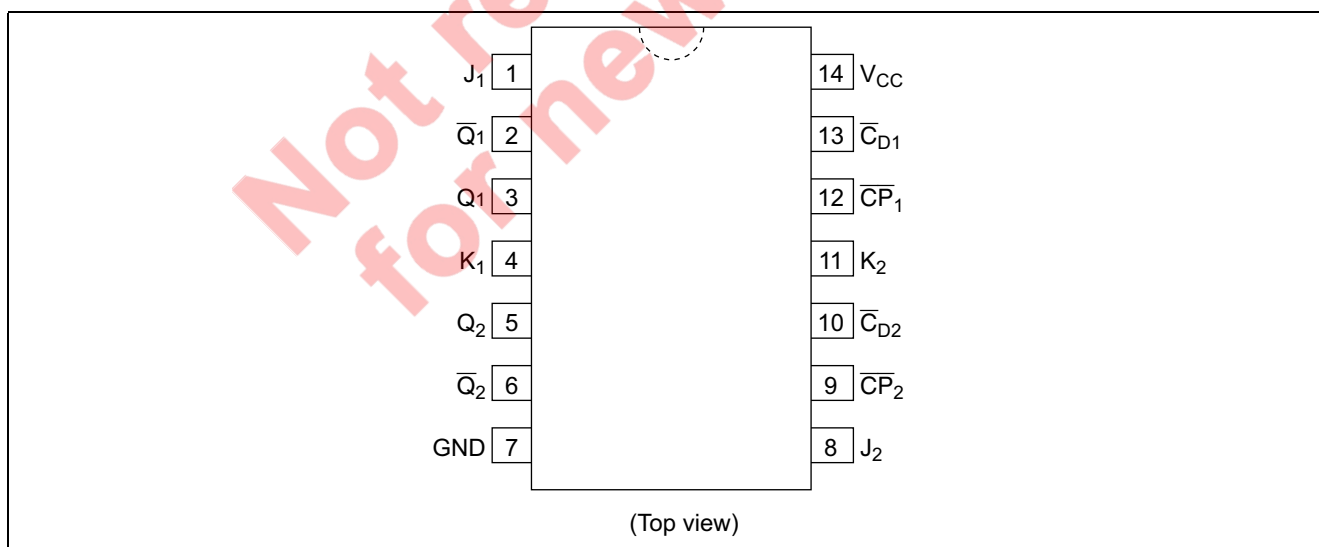

Logic Symbol

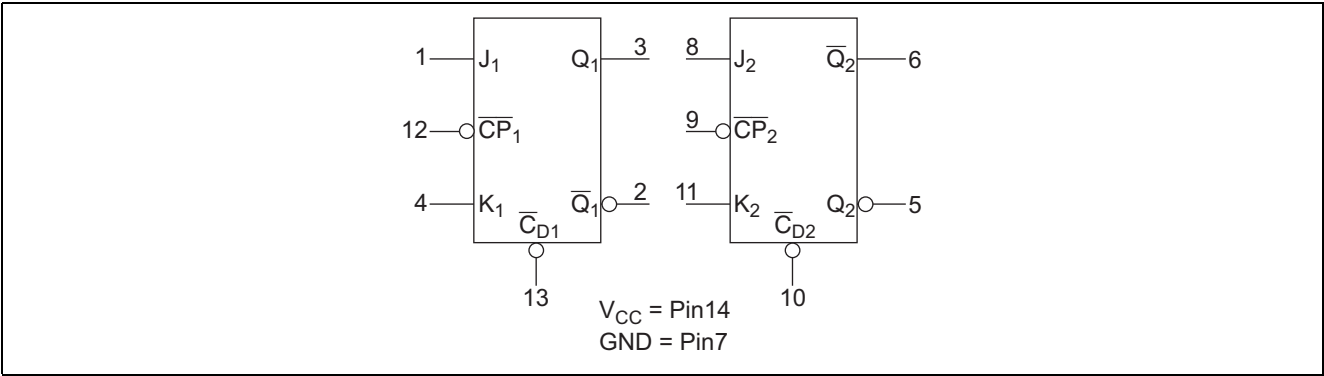

Pin Names


- J_1, J_2, K_1, K_2 Data Inputs
- $\overline{CP}_1, \overline{CP}_2$ Clock Pulse Inputs (Active Falling Edge)
- $\overline{C}_{D1}, \overline{C}_{D2}$ Direct Clear Inputs (Active Low)
- $Q_1, Q_2, \overline{Q}_1, \overline{Q}_2$ Outputs

Truth Table

Inputs		Outputs
@ t_n		@ t_{n+1}
J	K	Q
L	L	Q_n
L	H	L
H	L	H
H	H	$\overline{Q}_n$

- H : High Voltage Level
- L : Low Voltage Level
- t_n : Bit time before clock pulse.
- t_{n+1} : Bit time after clock pulse.

Logic Diagram

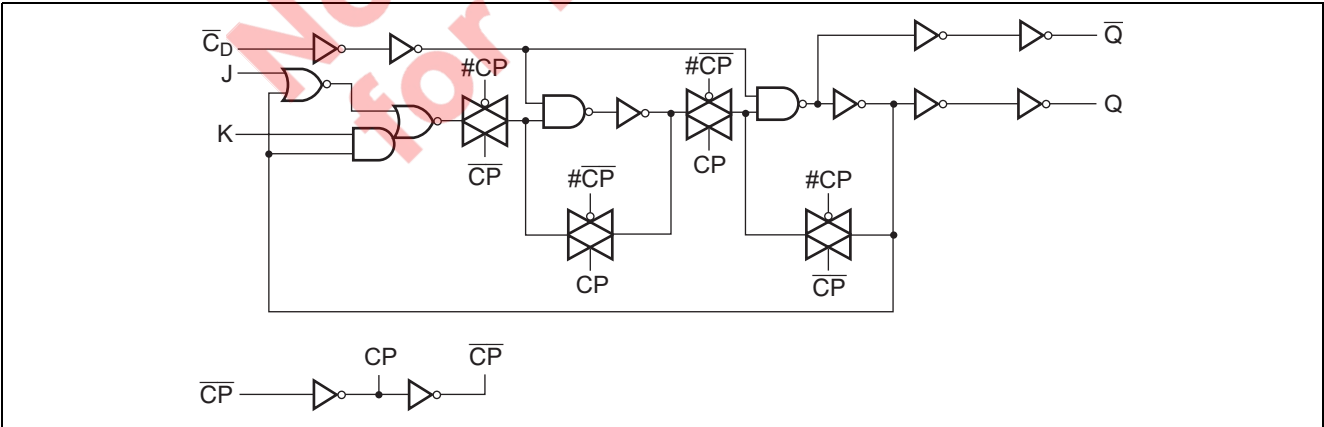

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit	Condition
Supply voltage	V_{CC}	-0.5 to 7	V	
DC input diode current	I_{IK}	-20	mA	$V_I = -0.5V$
		20	mA	$V_I = V_{CC}+0.5V$
DC input voltage	V_I	-0.5 to $V_{CC}+0.5$	V	
DC output diode current	I_{OK}	-50	mA	$V_O = -0.5V$
		50	mA	$V_O = V_{CC}+0.5V$
DC output voltage	V_O	-0.5 to $V_{CC}+0.5$	V	
DC output source or sink current	I_O	± 50	mA	
DC V_{CC} or ground current per output pin	I_{CC}, I_{GND}	± 50	mA	
Storage temperature	T_{stg}	-65 to +150	°C	

Recommended Operating Conditions: HD74AC107

Item	Symbol	Ratings	Unit	Condition
Supply voltage	V_{CC}	2 to 6	V	
Input and output voltage	V_I, V_O	0 to V_{CC}	V	
Operating temperature	T_a	-40 to +85	°C	
Input rise and fall time (except Schmitt inputs) V_{IN} 30% to 70% V_{CC}	t_r, t_f	8	ns/V	$V_{CC} = 3.0V$
				$V_{CC} = 4.5V$
				$V_{CC} = 5.5V$

DC Characteristics: HD74AC107

Item	Sym- bol	V_{CC} (V)	$T_a = 25^\circ C$			$T_a = -40 \text{ to } +85^\circ C$		Unit	Condition	
			min.	typ.	max.	min.	max.			
Input Voltage	V_{IH}	3.0	2.1	1.5	—	2.1	—	V	$V_{OUT} = 0.1V \text{ or } V_{CC} - 0.1V$	
		4.5	3.15	2.25	—	3.15	—			
		5.5	3.85	2.75	—	3.85	—			
	V_{IL}	3.0	—	1.50	0.9	—	0.9		$V_{OUT} = 0.1V \text{ or } V_{CC} - 0.1V$	
		4.5	—	2.25	1.35	—	1.35			
		5.5	—	2.75	1.65	—	1.65			
Output voltage	V_{OH}	3.0	2.9	2.99	—	2.9	—	V	$V_{IN} = V_{IL} \text{ or } V_{IH}$ $I_{OUT} = -50 \mu A$	
		4.5	4.4	4.49	—	4.4	—			
		5.5	5.4	5.49	—	5.4	—			
		3.0	2.58	—	—	2.48	—		$V_{IN} = V_{IL} \text{ or } V_{IH}$	$I_{OH} = -12 \text{ mA}$
		4.5	3.94	—	—	3.80	—			$I_{OH} = -24 \text{ mA}$
		5.5	4.94	—	—	4.80	—			$I_{OH} = -24 \text{ mA}$
	V_{OL}	3.0	—	0.002	0.1	—	0.1		$V_{IN} = V_{IL} \text{ or } V_{IH}$ $I_{OUT} = 50 \mu A$	
		4.5	—	0.001	0.1	—	0.1			
		5.5	—	0.001	0.1	—	0.1			
		3.0	—	—	0.32	—	0.37		$V_{IN} = V_{IL} \text{ or } V_{IH}$	$I_{OL} = 12 \text{ mA}$
		4.5	—	—	0.32	—	0.37			$I_{OL} = 24 \text{ mA}$
		5.5	—	—	0.32	—	0.37			$I_{OL} = 24 \text{ mA}$
		3.0	—	—	—	—	—		$V_{IN} = V_{CC} \text{ or GND}$	
		4.5	—	—	—	—	—			
Input leakage current	I_{IN}	5.5	—	—	± 0.1	—	± 1.0	μA		
Dynamic output current*	I_{OLD}	5.5	—	—	—	86	—	mA	$V_{OLD} = 1.1V$	
	I_{OHD}	5.5	—	—	—	-75	—	mA	$V_{OHD} = 3.85V$	
Quiescent supply current	I_{CC}	5.5	—	—	4.0	—	40	μA	$V_{IN} = V_{CC} \text{ or ground}$	

*Maximum test duration 2.0 ms, one output loaded at a time.

Recommended Operating Conditions: HD74ACT107

Item	Symbol	Ratings	Unit	Condition
Supply voltage	V_{CC}	2 to 6	V	
Input and output voltage	V_I, V_O	0 to V_{CC}	V	
Operating temperature	T_a	-40 to +85	°C	
Input rise and fall time (except Schmitt inputs) V_{IN} 0.8 to 2.0 V	t_r, t_f	8	ns/V	$V_{CC} = 4.5V$ $V_{CC} = 5.5V$

DC Characteristics: HD74ACT107

Item	Symbol	V_{CC} (V)	$T_a = 25^\circ C$			$T_a = -40$ to $+85^\circ C$		Unit	Condition
			min.	typ.	max.	min.	max.		
Input voltage	V_{IH}	4.5	2.0	1.5	—	2.0	—	V	$V_{OUT} = 0.1 V$ or $V_{CC}-0.1 V$
		5.5	2.0	1.5	—	2.0	—		
	V_{IL}	4.5	—	1.5	0.8	—	0.8		$V_{OUT} = 0.1 V$ or $V_{CC}-0.1 V$
		5.5	—	1.5	0.8	—	0.8		
Output voltage	V_{OH}	4.5	4.4	4.49	—	4.4	—	V	$V_{IN} = V_{IL}$ or V_{IH} $I_{OUT} = -50 \mu A$
		5.5	5.4	5.49	—	5.4	—		
		4.5	3.94	—	—	3.80	—		$V_{IN} = V_{IL}$ $I_{OH} = -24 mA$
		5.5	4.94	—	—	4.80	—		$I_{OH} = -24 mA$
	V_{OL}	4.5	—	0.001	0.1	—	0.1		$V_{IN} = V_{IL}$ or V_{IH} $I_{OUT} = 50 \mu A$
		5.5	—	0.001	0.1	—	0.1		
		4.5	—	—	0.32	—	0.37		$V_{IN} = V_{IL}$ $I_{OL} = 24 mA$
		5.5	—	—	0.32	—	0.37		$I_{OL} = 24 mA$
Input current	I_{IN}	5.5	—	—	± 0.1	—	± 1.0	μA	$V_{IN} = V_{CC}$ or GND
I_{CC} /input current	I_{CCT}	5.5	—	0.6	—	—	1.5	mA	$V_{IN} = V_{CC}-2.1 V$
Dynamic output current*	I_{OLD}	5.5	—	—	—	86	—	mA	$V_{OLD} = 1.1 V$
	I_{OHD}	5.5	—	—	—	-75	—	mA	$V_{OHD} = 3.85 V$
Quiescent supply current	I_{CC}	5.5	—	—	4.0	—	40	μA	$V_{IN} = V_{CC}$ or ground

*Maximum test duration 2.0 ms, one output loaded at a time.

AC Characteristics: HD74AC107

Item	Symbol	V_{CC} (V)* ¹	$T_a = +25^\circ C$ $C_L = 50 pF$			$T_a = -40^\circ C$ to $+85^\circ C$ $C_L = 50 pF$		Unit
			Min	Typ	Max	Min	Max	
Maximum clock frequency	f_{max}	3.3	125	—	—	100	—	MHz
		5.0	150	—	—	125	—	
Propagation delay $\bar{C}_P$ to Q or $\bar{Q}$	t_{PLH}	3.3	1.0	9.5	13.0	1.0	14.0	ns
		5.0	1.0	7.5	10.0	1.0	11.0	
Propagation delay $\bar{C}_P$ to Q or $\bar{Q}$	t_{PHL}	3.3	1.0	10.0	13.5	1.0	14.5	ns
		5.0	1.0	8.0	10.5	1.0	11.5	
Propagation delay $\bar{C}_D$ to $\bar{Q}$	t_{PLH}	3.3	1.0	9.5	13.0	1.0	14.0	ns
		5.0	1.0	7.5	10.0	1.0	11.0	
Propagation delay $\bar{C}_D$ to $\bar{Q}$	t_{PHL}	3.3	1.0	9.5	13.0	1.0	14.0	ns
		5.0	1.0	7.5	10.0	1.0	11.0	

Note: 1. Voltage Range 3.3 is 3.3 V $\pm$ 0.3 V

Voltage Range 5.0 is 5.0 V $\pm$ 0.5 V

Operating Requirements: HD74AC107

Item	Symbol	V _{CC} (V)*1	Ta = +25°C C _L = 50 pF		Ta = −40°C to +85°C C _L = 50 pF	Unit
			Typ	Guaranteed Minimum		
Setup time J or k to $\overline{C}_P$	t _{su}	3.3	3.0	5.5	6.0	ns
		5.0	2.0	4.0	4.5	
Hold time $\overline{C}_P$ to J or k	t _h	3.3	−1.5	0.0	0.0	
		5.0	−0.5	0.0	0.0	
Pulse width $\overline{C}_P$ or $\overline{C}_D$	t _w	3.3	2.0	5.5	7.0	
		5.0	2.0	4.5	5.0	
Recovery time $\overline{C}_D$ to $\overline{C}_P$	t _{rec}	3.3	1.5	3.0	3.0	
		5.0	1.0	3.0	3.0	

Note: 1. Voltage Range 3.3 is 3.3 V ± 0.3 V

Voltage Range 5.0 is 5.0 V ± 0.5 V

AC Characteristics: HD74ACT107

Item	Symbol	$V_{CC} (V)^{*1}$	Ta = +25°C C _L = 50 pF			Ta = -40°C to +85°C C _L = 50 pF		Unit
			Min	Typ	Max	Min	Max	
Maximum clock frequency	f_{max}	5.0	100	—	—	80	—	MHz
Propagation delay $\overline{C}_P$ to Q or $\overline{Q}$	t_{PLH}	5.0	1.0	9.5	12.5	1.0	13.5	ns
Propagation delay $\overline{C}_P$ to Q or $\overline{Q}$	t_{PHL}	5.0	1.0	10.5	13.0	1.0	14.0	
Propagation delay $\overline{C}_D$ to Q	t_{PLH}	5.0	1.0	8.5	11.0	1.0	12.0	
Propagation delay $\overline{C}_D$ to Q	t_{PHL}	5.0	1.0	8.5	11.0	1.0	12.0	

Note: 1. Voltage Range 5.0 is 5.0 V ± 0.5 V

Operating Requirements: HD74ACT107

Item	Symbol	V _{CC} (V)*1	Ta = +25°C C _L = 50 pF		Ta = −40°C to +85°C C _L = 50 pF	Unit
			Typ	Guaranteed Minimum		
Setup time J or k to $\overline{C}_p$	t _{su}	5.0	2.5	7.0	8.0	ns
Hold time $\overline{C}_p$ to J or k	t _h	5.0	0.0	1.5	1.5	
Pulse width $\overline{C}_p$ or $\overline{C}_D$	t _w	5.0	4.5	7.0	8.0	
Recovery time $\overline{C}_D$ to $\overline{C}_p$	t _{rec}	5.0	—	3.0	3.0	




Note: 1. Voltage Range 5.0 is 5.0 V ± 0.5 V

Capacitance

Item	Symbol	Typ	Unit	Condition
Input capacitance	C_{IN}	4.5	pF	$V_{CC} = 5.5 V$
Power dissipation capacitance	C_{PD}	35.0	pF	$V_{CC} = 5.0 V$

Package Dimensions



As of January, 2003
Unit: mm

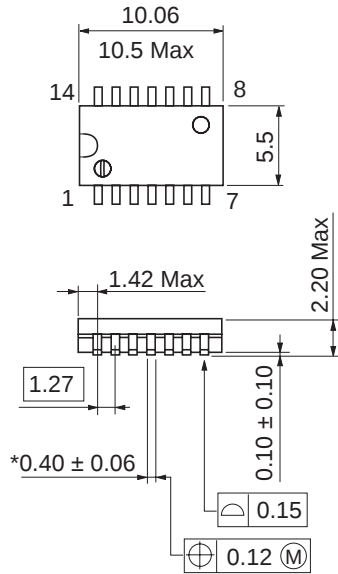

Package Code	FP-14DAV
JEDEC	—
JEITA	Conforms
Mass (reference value)	0.23 g

*Ni/Pd/Au plating

As of January, 2003
Unit: mm

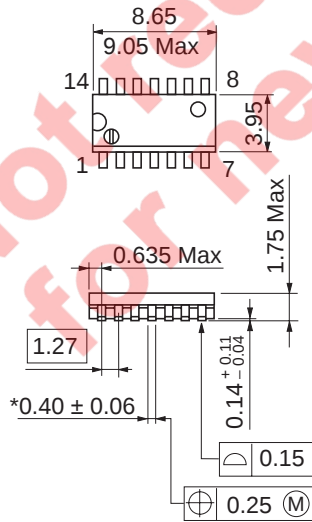

Package Code	FP-14DNV
JEDEC	Conforms
JEITA	Conforms
Mass (reference value)	0.13 g

*Ni/Pd/Au plating

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



RENESAS SALES OFFICES

<http://www.renesas.com>

Renesas Technology America, Inc.

450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500 Fax: <1> (408) 382-7501

Renesas Technology Europe Limited.

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, United Kingdom
Tel: <44> (1628) 585 100, Fax: <44> (1628) 585 900

Renesas Technology Europe GmbH

Dornacher Str. 3, D-85622 Feldkirchen, Germany
Tel: <49> (89) 380 70 0, Fax: <49> (89) 929 30 11

Renesas Technology Hong Kong Ltd.

7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2375-6836

Renesas Technology Taiwan Co., Ltd.

FL 10, #99, Fu-Hsing N. Rd., Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd.

26/F., Ruijin Building, No.205 Maoming Road (S), Shanghai 200020, China
Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd.

1, Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001