

# Low Voltage, Low On-Resistance, Dual DPDT/Quad SPDT Analog Switch

## DESCRIPTION

The DG2788, DG2789 are monolithic CMOS analog switching products designed for high performance switching of analog signals. Combining low power, high speed, low on-resistance and small physical size, the DG2788, DG2789 are ideal for portable and battery powered applications requiring high performance and efficient use of board space. The DG2788, DG2789 are built on Vishay Siliconix's low voltage process. An epitaxial layer prevents latchup. Break-before-make is guaranteed.

The switch conducts equally well in both directions when on, and blocks up to the power supply level when off. The DG2788 is configured as a dual Double Pole Double Throw switches while the DG2789 is configured as a Quad Single Pole Double Throw. The DG2789 has one control pin for all four SPDT switches and also has an enable pin that can turn all switches off.

The DG2788 and DG2789 comes in a small miniQFN-16 lead package (2.6 x 1.8 x 0.75 mm).

As a committed partner to the community and the environment, Vishay Siliconix manufactures this product with the lead (Pb)-free device terminations and is 100 % RoHS compliant.

## FEATURES

- Low voltage operation (1.65 V to 4.3 V)
- Low on-resistance -  $R_{ON}$ : 0.4  $\Omega$  typ. at 2.7 V
- Fast switching:  $t_{ON}$  = 47 ns  
 $t_{OFF}$  = 15 ns
- miniQFN-16 package
- Latch-up current > 300 mA (JESD78)


**RoHS**  
COMPLIANT


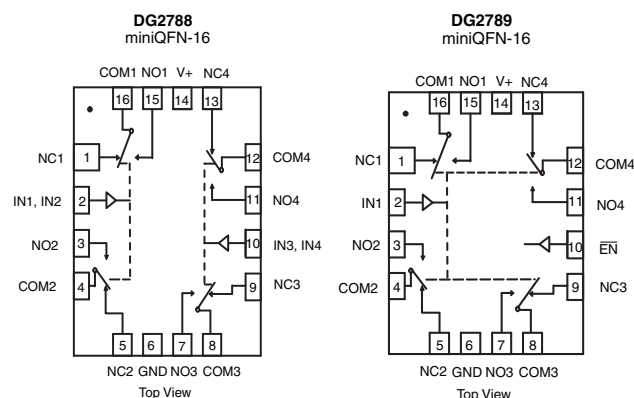
## BENEFITS

- Reduced power consumption
- High accuracy
- Reduce board space
- TTL/1.8 V logic compatible
- High bandwidth

## APPLICATIONS

- Cellular phones
- Speaker headset switching
- Audio and video signal routing
- PCMCIA cards
- Battery operated systems

## FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION



Device Marking: Axx for DG2788  
Bxx for DG2789  
xx = Date/Lot Traceability Code  
Note: Pin 1 has long lead

### TRUTH TABLE (DG2788)

Logic	NC1, 2, 3 and 4	NO1, 2, 3 and 4
0	ON	OFF
1	OFF	ON

### TRUTH TABLE (DG2789)

EN Logic	IN Logic	NC1, 2, 3 and 4	NO1, 2, 3 and 4
0	0	ON	OFF
0	1	OFF	ON
1	x	OFF	OFF

### ORDERING INFORMATION

Temp. Range	Package	Part Number
- 40 °C to 85 °C	miniQFN-16	DG2788DN-T1-E4 DG2789DN-T1-E4

<b>ABSOLUTE MAXIMUM RATINGS</b> ( $T_A = 25\text{ }^{\circ}\text{C}$ , unless otherwise noted)				
Parameter		Symbol	Limit	Unit
Reference to GND	V+		- 0.3 to 5.0	V
	IN, COM, NC, NO <sup>a</sup>		- 0.3 to (V+ + 0.3)	
Current (Any terminal except NO, NC or COM)			30	mA
Continuous Current (NO, NC, or COM)			$\pm 300$	
Peak Current (Pulsed at 1 ms, 10 % duty cycle)			$\pm 500$	
Storage Temperature (D Suffix)			- 65 to 150	$^{\circ}\text{C}$
Package Solder Reflow Conditions <sup>d</sup>	miniQFN-16		250	
Power Dissipation (Packages) <sup>b</sup>	miniQFN-16 <sup>c</sup>		525	mW

Notes:

- a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- b. All leads welded or soldered to PC board.
- c. Derate 6.6 mW/ $^{\circ}\text{C}$  above 70  $^{\circ}\text{C}$
- d. Manual soldering with iron is not recommended for leadless components. The miniQFN-16 is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper lip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection.



SPECIFICATIONS (V+ = 3 V)							
Parameter	Symbol	Test Conditions Otherwise Unless Specified V+ = 3 V, ± 10 %, VIN = 0.5 or 1.4 V <sup>e</sup>	Temp. <sup>a</sup>	Limits - 40 °C to 85 °C			Unit
				Min. <sup>b</sup>	Typ. <sup>c</sup>	Max. <sup>b</sup>	
Analog Switch							
Analog Signal Range <sup>d</sup>	VNO, VNC, VCOM		Full	0		V+	V
On-Resistance	RON	V+ = 2.7 V, VCOM = 0.5 V, INO, INC = 100 mA	Room		0.4	0.5	Ω
		V+ = 2.7 V, VCOM = 1.5 V, INO, INC = 100 mA		0.33			
			Full		0.56		
RON Flatness <sup>d</sup>	RON Flatness	V+ = 2.7 V, VCOM = 0 to V+, INO, INC = 100 mA	Room		0.1	0.15	
RON Match <sup>d</sup>	ΔRON		Room		0.05		
Switch Off Leakage Current	INO(off), INC(off)F	V+ = 3.3 V, VNO, VNC = 0.3 V/3.0 V, VCOM = 3.0 V/0.3 V	Room Full	- 1 - 10		1 10	nA
	ICOM(off)		Room Full	- 1 - 10		1 10	
Channel-On Leakage Current	ICOM(on)	V+ = 3.3 V, VNO, VNC = VCOM = 0.3 V/3.0 V	Room Full	- 1 - 10		1 10	
Digital Control							
Input High Voltage	VINH		Full	1.4			V
Input Low Voltage	VINL		Full			0.5	
Input Capacitance	Cin		Full		6		pF
Input Current	IINL or IINH	VIN = 0 or V+	Full	- 1		1	μA
Dynamic Characteristics							
Turn-On Time	tON	VNO or VNC = 1.5 V, RL = 50 Ω, CL = 35 pF	Romm Full		47	72 75	ns
Turn-Off Time	tOFF		Room Full		15	43 45	
Break-Before-Make Time	td		Full	1			
Charge Injection <sup>d</sup>	QINJ	CL = 1 nF, VGEN = 0 V, RGEN = 0 Ω	Room		87		pC
Off-Isolation <sup>d</sup>	OIRR	RL = 50 Ω, CL = 5 pF, f = 100 kHz	Room		- 69		dB
		RL = 50 Ω, CL = 5 pF, f = 1 MHz			- 49		
Crosstalk <sup>d, f</sup>	XTALK	RL = 50 Ω, CL = 5 pF, f = 100 kHz			- 106		
		RL = 50 Ω, CL = 5 pF, f = 1 MHz			- 96		
NO, NC Off Capacitance <sup>d</sup>	CNO(off)	f = 1 MHz	Room		81		pF
	CNC(off)		Room		81		
Channel-On Capacitance <sup>d</sup>	CNO(on)		Room		186		
	CNC(on)		Room		186		
Power Supply							
Power Supply Range	V+			2.7		3.3	V
Power Supply Current	I+	VIN = 0 or V+	Full			1.0	μA

SPECIFICATIONS (V+ = 4.3 V)							
Parameter	Symbol	Test Conditions Otherwise Unless Specified V+ = 4.3 V, VIN = 0.5 or 1.6 V <sup>e</sup>	Temp. <sup>a</sup>	Limits - 40 °C to 85 °C			Unit
				Min. <sup>b</sup>	Typ. <sup>c</sup>	Max. <sup>b</sup>	
Analog Switch							
Analog Signal Range <sup>d</sup>	VNO, VNC, VCOM		Full	0		V+	V
On-Resistance	RON	V+ = 4.3 V, VCOM = 0.9 V, INO, INC = 100 mA	Room		0.32	0.45	Ω
		V+ = 4.3 V, VCOM = 2.5 V, INO, INC = 100 mA			0.27		
			Full		0.5		
RON Flatness <sup>d</sup>	RON Flatness	V+ = 4.3 V, VCOM = 0 to V+, INO, INC = 100 mA	Room		0.1	0.15	
RON Match <sup>d</sup>	ΔRON		Room		0.03		
Switch Off Leakage Current <sup>d</sup>	INO(off), INC(off)	V+ = 4.3 V, VNO, VNC = 0.3 V/4.0 V, VCOM = 4.0 V/0.3 V	Room Full	-10 - 100		10 100	nA
	ICOM(off)		Room Full	- 10 - 100		10 100	
Channel-On Leakage Current <sup>d</sup>	ICOM(on)	V+ = 4.3 V, VNO, VNC = VCOM = 3.0 V/4.0 V	Room Full	- 10 - 100		10 100	
Digital Control							
Input High Voltage	VINH		Full	1.6			V
Input Low Voltage	VINL		Full			0.5	
Input Capacitance	Cin		Full		6		pF
Input Current	IINL or IINH	VIN = 0 or V+	Full	- 1		1	μA
Dynamic Characteristics							
Charge Injection <sup>d</sup>	QINJ	CL = 1 nF, VGEN = 0 V, RGEN = 0 Ω	Room		105		pC
NO, NC Off Capacitance <sup>d</sup>	CNO(off)	f = 1 MHz	Room		79		pF
	CNC(off)		Room		79		
Channel-On Capacitance <sup>d</sup>	CNO(on)		Room		183		
	CNC(on)		Room		183		
Power Supply							
Power Supply Range	V+					4.3	V
Power Supply Current	I+	VIN = 0 or V+	Full			1.0	μA

Notes:

a. Room = 25 °C, Full = as determined by the operating suffix.

b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.

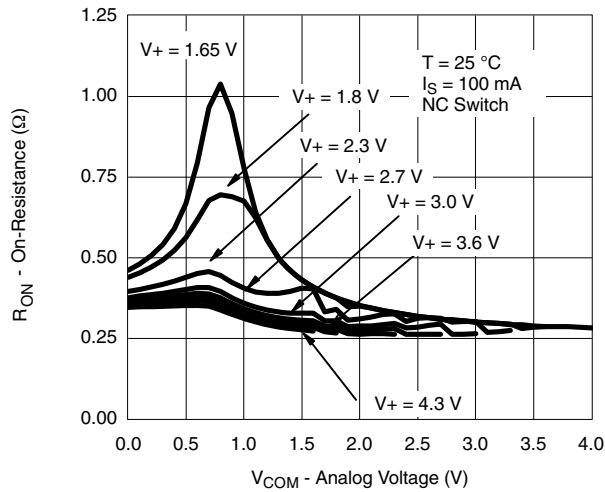
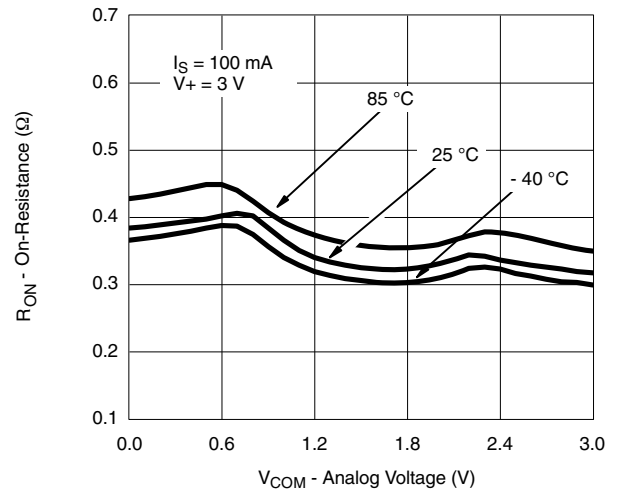
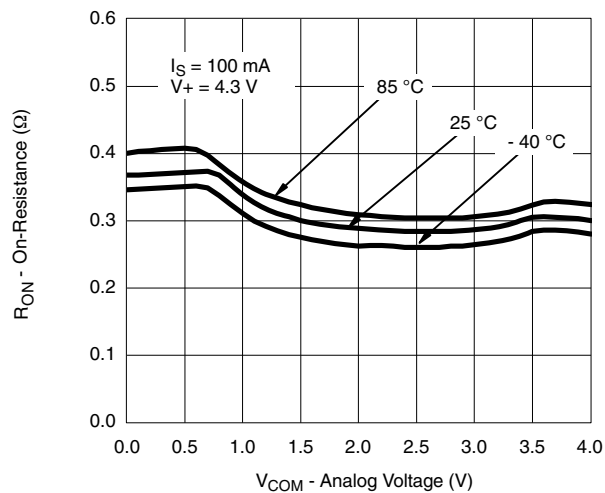
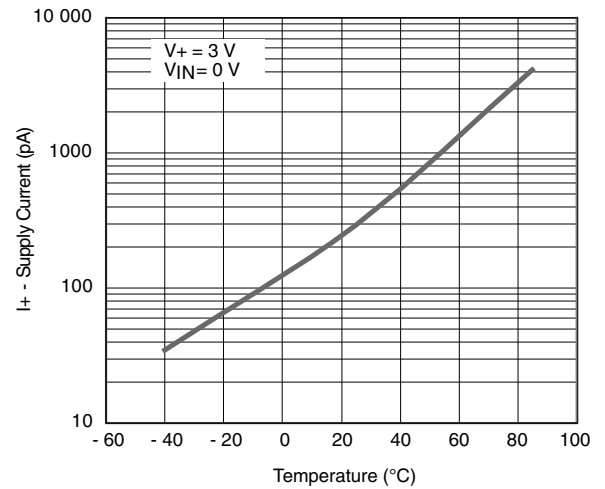
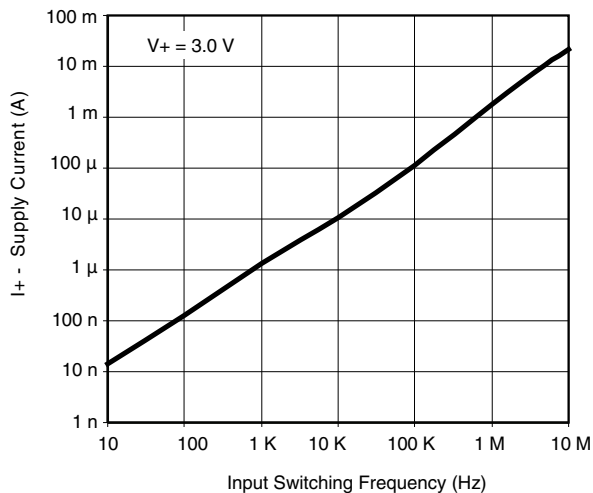
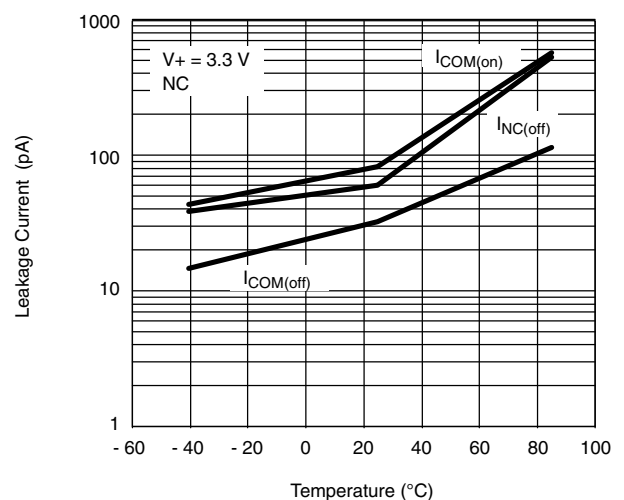
c. Typical values are for design aid only, not guaranteed nor subject to production testing.

d. Guarantee by design, not subjected to production test.

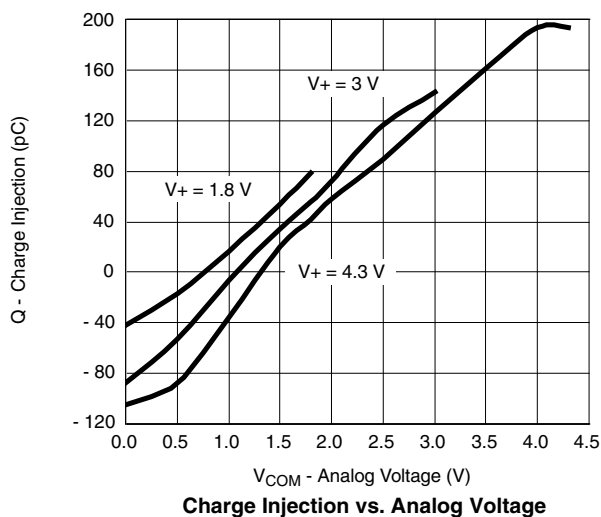
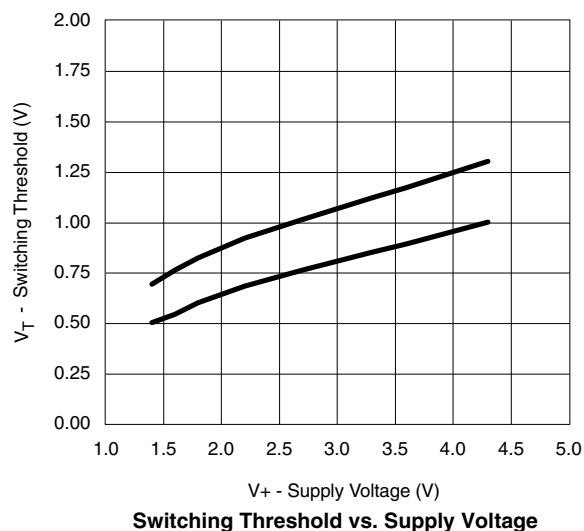
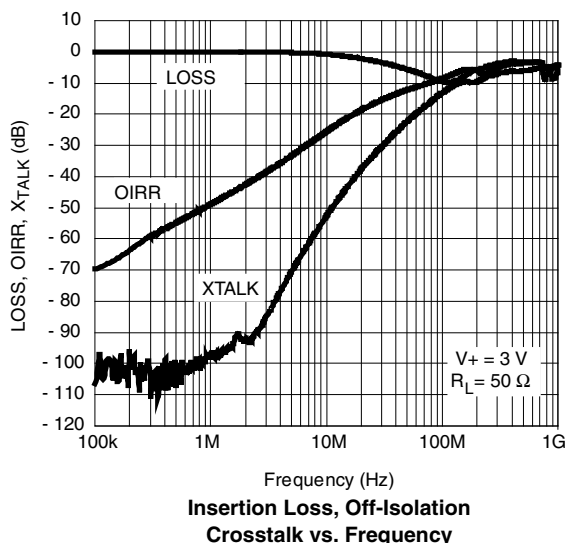
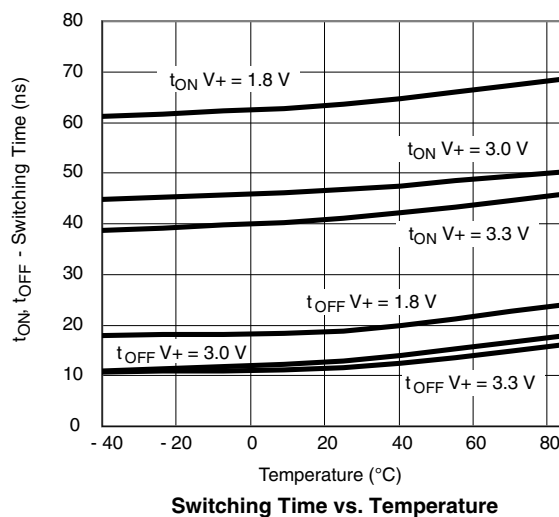
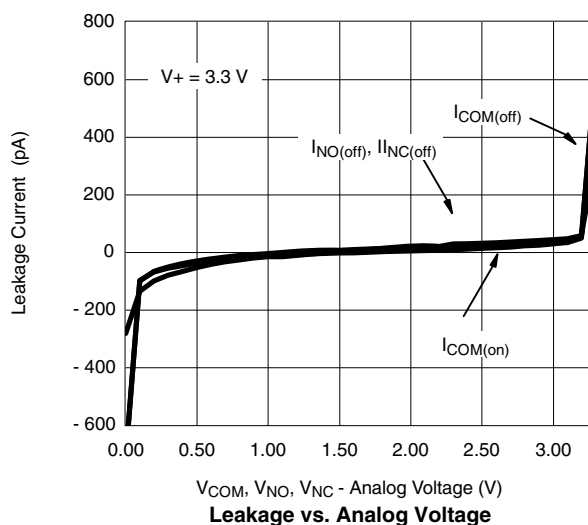
e. V<sub>IN</sub> = input voltage to perform proper function.

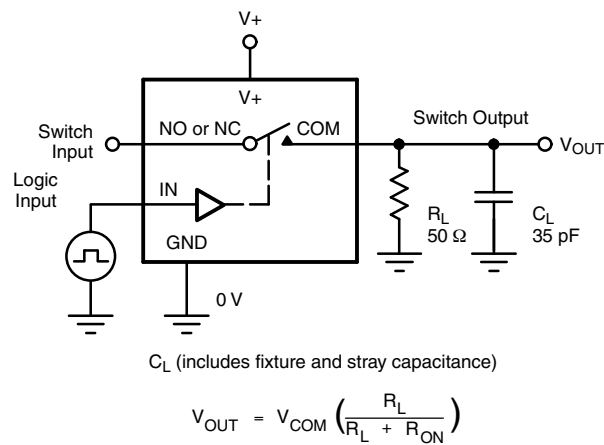
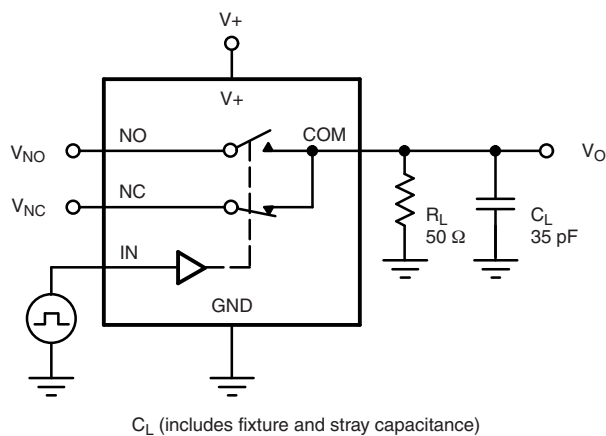
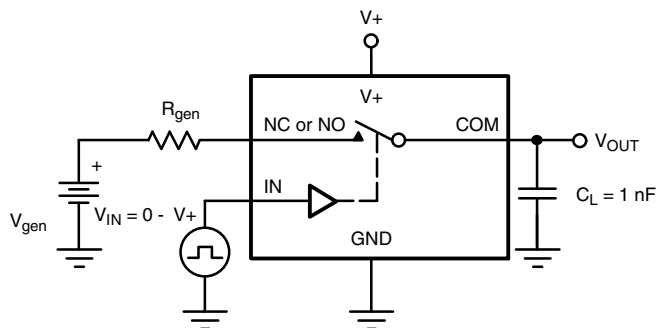
f. Crosstalk measured between channels.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**TYPICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$ , unless otherwise noted)

 **$R_{ON}$  vs.  $V_{COM}$  and Supply Voltage**

 **$R_{ON}$  vs. Analog Voltage and Temperature**

 **$R_{ON}$  vs. Analog Voltage and Temperature**

**Supply Current vs. Temperature**

**Supply Current vs. Input Switching Frequency**

**Leakage Current vs. Temperature**

## TYPICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise noted)



**TEST CIRCUITS**

**Figure 1. Switching Time**

**Figure 2. Break-Before-Make Interval**

**Figure 3. Charge Injection**

## TEST CIRCUITS

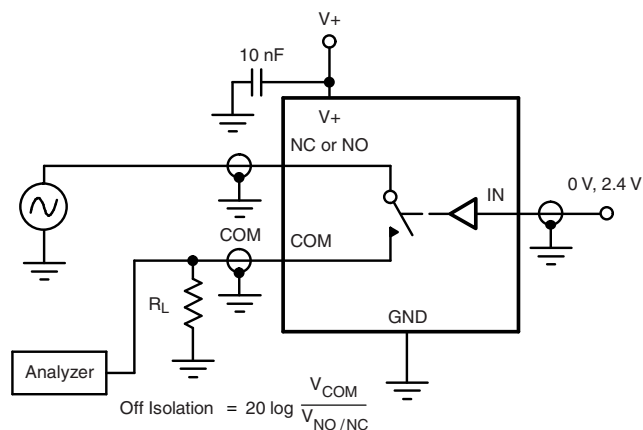


Figure 4. Off-Isolation

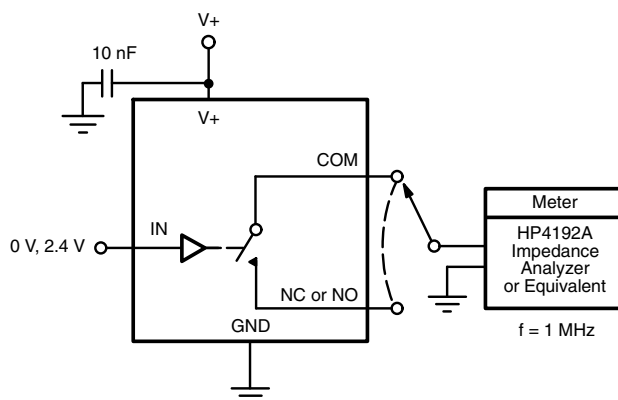
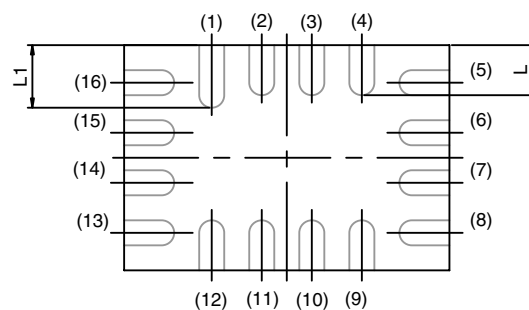
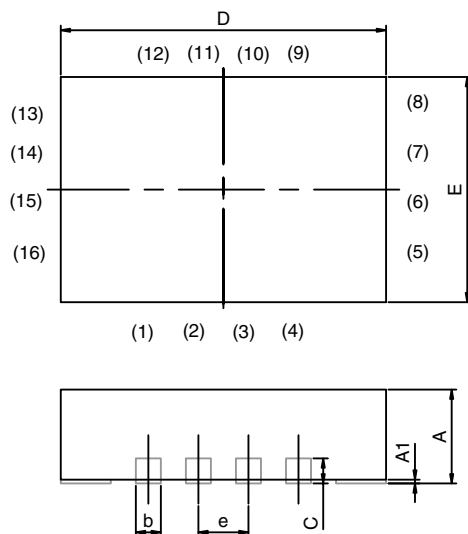


Figure 5. Channel Off/On Capacitance

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see [www.vishay.com/ppg773863](http://www.vishay.com/ppg773863).



## MINI QFN-16L



BACK SIDE VIEW

DIM	MILLIMETERS			INCHES		
	MIN.	NAM	MAX.	MIN.	NAM	MAX.
A	0.70	0.75	0.80	0.0275	0.0295	0.0315
A1	0	-	0.05	0	-	0.002
b	0.15	0.20	0.25	0.0059	0.0078	0.0098
C	0.15	0.20	0.25	0.0059	0.0078	0.0098
D	2.60 BSC			0.1023 BSC		
E	1.80 BSC			0.0708 BSC		
e	0.40 BSC			0.0157 BSC		
L	0.35	0.40	0.45	0.0137	0.0157	0.0177
L1	0.45	0.50	0.55	0.0177	0.0196	0.0216

ECN T-06380-Rev. A, 14-Aug-06  
DWG: 5954



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.