

## FEATURES


- 1000ps max. CLK to output
- Extended 100E VEE range of -4.2V to -5.5V
- SHIFT overrides HOLD, /LOAD control
- Asynchronous Master Reset
- Pin-compatible with E141
- Fully compatible with industry standard 10KH, 100K ECL levels
- Internal 75KΩ input pulldown resistors
- Fully compatible with Motorola MC10E/100E241
- Available in 28-pin PLCC package

## DESCRIPTION

The SY10/100E241 are 8-bit shiftable registers designed for use in new, high-performance ECL systems. Unlike the E141, the E241 features internal data feedback organized such that the SHIFT control overrides the HOLD, /LOAD control. Thus, the normal operations of HOLD and LOAD can be toggled with a single control line without the need for external gating. This configuration also enables switching to scan mode with the single SHIFT control line.

The eight inputs D0–D7 accept parallel input data, while S-IN accepts serial input data when in shift mode. Data is accepted a set-up time before the rising edge of CLK. Shifting is also accomplished on the rising clock edge. A HIGH on the Master Reset pin (MR) asynchronously resets all the registers to zero.


## BLOCK DIAGRAM

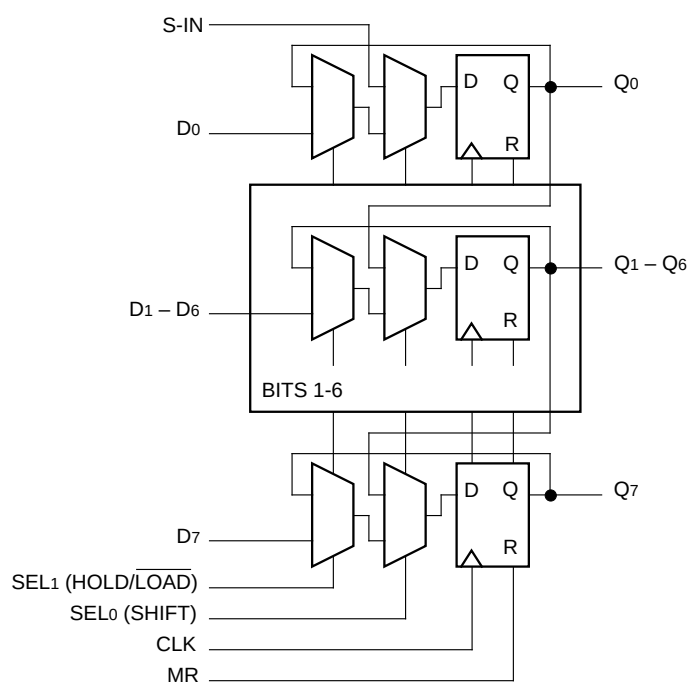

## PIN NAMES

| Pin   | Function             |
|-------|----------------------|
| D0–D7 | Parallel Data Inputs |
| S-IN  | Serial Data Input    |
| SEL0  | SHIFT Control        |
| SEL1  | HOLD, /LOAD Control  |
| CLK   | Clock                |
| MR    | Master Reset         |
| Q0–Q7 | Data Outputs         |
| VCC0  | Vcc to Output        |

## PACKAGE/ORDERING INFORMATION

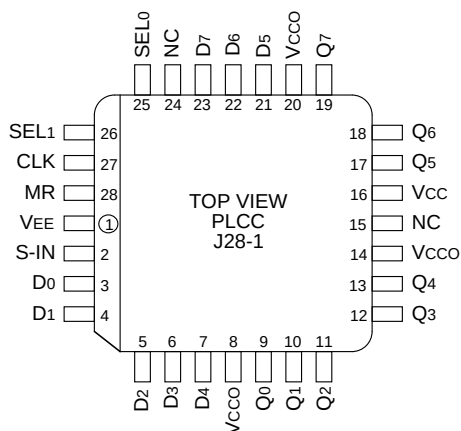

28-Pin PLCC (J28-1)

Ordering Information<sup>(1)</sup>

| Part Number                     | Package Type | Operating Range | Package Marking                             | Lead Finish |
|---------------------------------|--------------|-----------------|---------------------------------------------|-------------|
| SY10E241JC                      | J28-1        | Commercial      | SY10E241JC                                  | Sn-Pb       |
| SY10E241JCTR <sup>(2)</sup>     | J28-1        | Commercial      | SY10E241JC                                  | Sn-Pb       |
| SY100E241JC                     | J28-1        | Commercial      | SY100E241JC                                 | Sn-Pb       |
| SY100E241JCTR <sup>(2)</sup>    | J28-1        | Commercial      | SY100E241JC                                 | Sn-Pb       |
| SY10E241JZ <sup>(3)</sup>       | J28-1        | Commercial      | SY10E241JZ with Pb-Free bar-line indicator  | Matte-Sn    |
| SY10E241JZTR <sup>(2, 3)</sup>  | J28-1        | Commercial      | SY10E241JZ with Pb-Free bar-line indicator  | Matte-Sn    |
| SY100E241JZ <sup>(3)</sup>      | J28-1        | Commercial      | SY100E241JZ with Pb-Free bar-line indicator | Matte-Sn    |
| SY100E241JZTR <sup>(2, 3)</sup> | J28-1        | Commercial      | SY100E241JZ with Pb-Free bar-line indicator | Matte-Sn    |

## Notes:

1. Contact factory for die availability. Dice are guaranteed at  $T_A = 25^\circ\text{C}$ , DC Electricals only.
2. Tape and Reel.
3. Pb-Free package is recommended for new designs.

**TRUTH TABLE**

| SEL0 | SEL1 | Function                                    |
|------|------|---------------------------------------------|
| L    | L    | Load                                        |
| L    | H    | Hold                                        |
| H    | X    | Shift (D <sub>n</sub> to D <sub>n+1</sub> ) |

**DC ELECTRICAL CHARACTERISTICS**V<sub>EE</sub> = V<sub>EE</sub> (Min.) to V<sub>EE</sub> (Max.); V<sub>CC</sub> = V<sub>CCO</sub> = GND


| Symbol          | Parameter            | T <sub>A</sub> = 0°C |      |      | T <sub>A</sub> = +25°C |      |      | T <sub>A</sub> = +85°C |      |      | Unit | Condition |
|-----------------|----------------------|----------------------|------|------|------------------------|------|------|------------------------|------|------|------|-----------|
|                 |                      | Min.                 | Typ. | Max. | Min.                   | Typ. | Max. | Min.                   | Typ. | Max. |      |           |
| I <sub>IH</sub> | Input HIGH Current   | —                    | —    | 150  | —                      | —    | 150  | —                      | —    | 150  | μA   | —         |
| I <sub>EE</sub> | Power Supply Current | —                    | —    | —    | —                      | —    | —    | —                      | —    | —    | mA   | —         |
|                 |                      | 10E                  | 125  | 150  | 125                    | 150  | 150  | 125                    | 150  | 150  |      |           |
|                 |                      | 100E                 | 125  | 150  | 125                    | 150  | 150  | 144                    | 173  | 173  |      |           |

**AC ELECTRICAL CHARACTERISTICS**V<sub>EE</sub> = V<sub>EE</sub> (Min.) to V<sub>EE</sub> (Max.); V<sub>CC</sub> = V<sub>CCO</sub> = GND

| Symbol                           | Parameter                                                                            | T <sub>A</sub> = 0°C |      |      | T <sub>A</sub> = +25°C |      |      | T <sub>A</sub> = +85°C |      |      | Unit | Condition |
|----------------------------------|--------------------------------------------------------------------------------------|----------------------|------|------|------------------------|------|------|------------------------|------|------|------|-----------|
|                                  |                                                                                      | Min.                 | Typ. | Max. | Min.                   | Typ. | Max. | Min.                   | Typ. | Max. |      |           |
| f <sub>SHIFT</sub>               | Max. Shift Frequency                                                                 | 700                  | 900  | —    | 700                    | 900  | —    | 700                    | 900  | —    | MHz  | —         |
| t <sub>PD</sub>                  | Propagation Delay to Output<br>CLK<br>MR                                             | 625                  | 750  | 975  | 625                    | 750  | 975  | 625                    | 750  | 975  | ps   | —         |
|                                  |                                                                                      | 600                  | 725  | 975  | 600                    | 725  | 975  | 600                    | 725  | 975  |      |           |
| t <sub>S</sub>                   | Set-up Time<br>D<br>SEL <sub>0</sub> (SHIFT)<br>SEL <sub>1</sub> (HOLD/LOAD)<br>S-IN | 175                  | 25   | —    | 175                    | 25   | —    | 175                    | 25   | —    | ps   | —         |
|                                  |                                                                                      | 200                  | —    | 350  | 200                    | —    | 350  | 200                    | —    | —    |      |           |
|                                  |                                                                                      | 400                  | 250  | —    | 400                    | 250  | —    | 400                    | 250  | —    |      |           |
|                                  |                                                                                      | 125                  | —100 | —    | 125                    | —100 | —    | 125                    | —100 | —    |      |           |
| t <sub>H</sub>                   | Hold Time<br>D<br>SEL <sub>0</sub> (SHIFT)<br>SEL <sub>1</sub> (HOLD/LOAD)<br>S-IN   | 200                  | —25  | —    | 200                    | —25  | —    | 200                    | —25  | —    | ps   | —         |
|                                  |                                                                                      | 100                  | —200 | —    | 100                    | —200 | —    | 100                    | —200 | —    |      |           |
|                                  |                                                                                      | 50                   | —250 | —    | 50                     | —250 | —    | 50                     | —250 | —    |      |           |
|                                  |                                                                                      | 300                  | 100  | —    | 300                    | 100  | —    | 300                    | 100  | —    |      |           |
| t <sub>RR</sub>                  | Reset Recovery Time                                                                  | 900                  | 600  | —    | 900                    | 600  | —    | 900                    | 600  | —    | ps   | —         |
| t <sub>PW</sub>                  | Minimum Pulse Width<br>CLK, MR                                                       | 400                  | —    | —    | 400                    | —    | —    | 400                    | —    | —    | ps   | —         |
| t <sub>skew</sub>                | Within-Device Skew                                                                   | —                    | 60   | —    | —                      | 60   | —    | —                      | 60   | —    | ps   | 1         |
| t <sub>r</sub><br>t <sub>f</sub> | Rise/Fall Time<br>20% to 80%                                                         | 300                  | 525  | 800  | 300                    | 525  | 800  | 300                    | 525  | 800  | ps   | —         |

**Note:**

1. Within-device skew is defined as identical transitions on similar paths through a device.

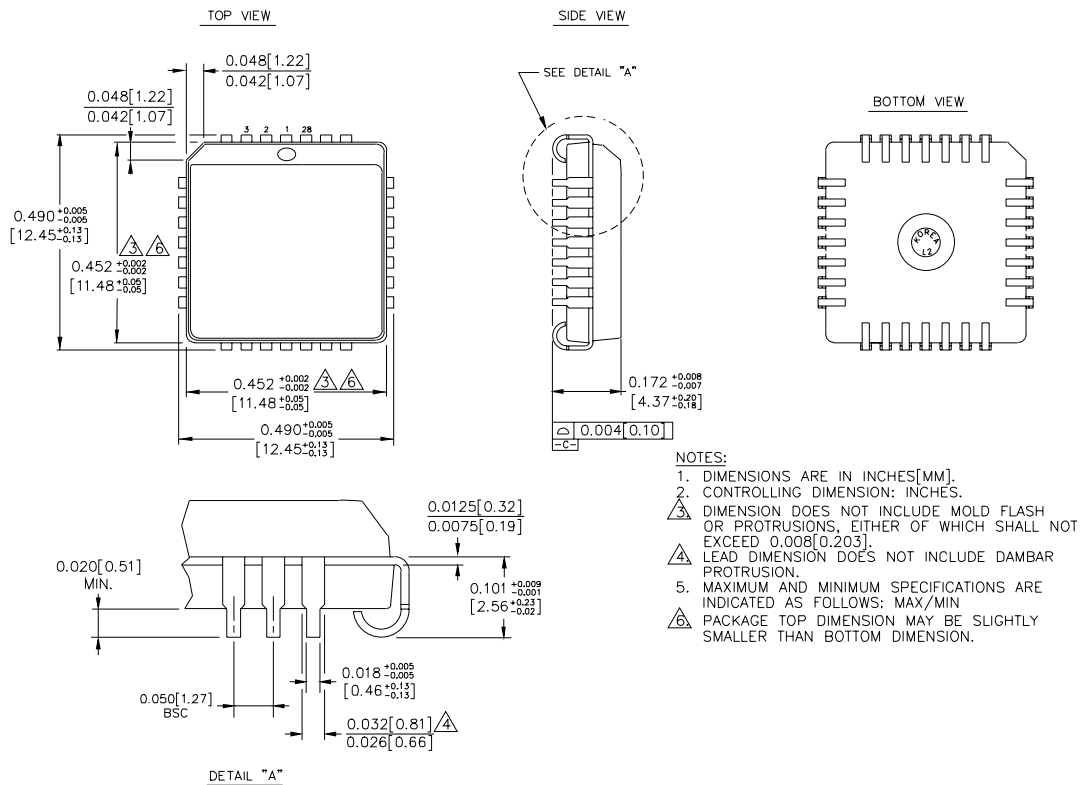**28-PIN PLCC (J28-1)**

Rev. 03

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.